

**TECHNICAL SPECIFICATIONS**  
**FOR**  
**ARCHITECTURAL, CIVIL AND**  
**MEP WORKS**

**PURCHASER/CLIENT/OWNER : MINISTRY OF MICRO, SMALL AND  
MEDIUM ENTERPRISES**

**PROJECT : MSME TECHNOLOGY CENTER, MUMBAI**

**LOCATION : MUMBAI, MAHARASHTRA**

**CONSULTANT/CMC/PROJECT  
MANAGER : TATA CONSULTING ENGINEERS LIMITED**



## Table of Contents

|                                                                                           |            |
|-------------------------------------------------------------------------------------------|------------|
| <b>ARCHITECTURE WORKS .....</b>                                                           | <b>8</b>   |
| 1.1 ARCHITECTURE SCOPE OF WORK .....                                                      | 8          |
| 1.2 SPECIFICATIONS FOR NON-DSR ITEMS .....                                                | 8          |
| <b>CIVIL WORKS .....</b>                                                                  | <b>36</b>  |
| 2.1 RUBBLE SOLING WORK.....                                                               | 36         |
| 2.2 WATERPROOFING OF UG WATER TANK.....                                                   | 37         |
| 2.3 LIST OF APPROVED MAKES FOR CIVIL AND ARCHITECTURAL WORKS.....                         | 37         |
| <b>PLUMBING WORKS .....</b>                                                               | <b>48</b>  |
| 3.1 SCOPE .....                                                                           | 48         |
| 3.2 SCAFFOLDING .....                                                                     | 48         |
| 3.3 PROTECTION.....                                                                       | 49         |
| 3.4 GUARANTEE .....                                                                       | 49         |
| 3.5 APPLICABLE CODES, STANDARDS AND PUBLICATIONS – .....                                  | 49         |
| 3.6 QUALITY ASSURANCE AND QUALITY CONTROL .....                                           | 53         |
| 3.7 SANITARY AND OTHER APPLIANCES .....                                                   | 54         |
| 3.8 SOIL, WASTE, VENT AND RAINWATER PIPES.....                                            | 57         |
| 3.9 DRAINAGE ACCESSORIES.....                                                             | 60         |
| 3.10 MEASUREMENT AND RATES.....                                                           | 61         |
| 3.11 WATER SUPPLY SYSTEM .....                                                            | 63         |
| 3.12 VALVES & FITTINGS.....                                                               | 65         |
| 3.13 TESTING .....                                                                        | 67         |
| 3.14 PUMPS.....                                                                           | 71         |
| 3.15 SUBMERSIBLE PUMPS FOR WASTE TRANSFER .....                                           | 78         |
| 3.17 PLUMBING SYSTEM-ELECTRICAL REQUIREMENTS .....                                        | 80         |
| 3.18 COMMISSIONING & GUARANTEE .....                                                      | 83         |
| 3.19 DATA SHEETS .....                                                                    | 88         |
| 3.20 LIST OF APPROVED MAKES FOR PLUMBING AND SANITARY WORKS.....                          | 105        |
| <b>FIRE FIGHTING WORKS .....</b>                                                          | <b>140</b> |
| 4.1 TECHNICAL SPECIFICATION FIRE PROTECTION SYSTEM.....                                   | 140        |
| 4.2 FIRE PROTECTION SYSTEM-ELECTRICAL REQUIREMENTS .....                                  | 147        |
| 4.3 FIRE PROTECTION SYSTEM-INSTRUMENTATION AND CONTROL (I&C) SYSTEM<br>REQUIREMENTS ..... | 151        |
| 4.4 DATA SHEETS.....                                                                      | 169        |
| 4.5 LIST OF APPROVED MAKES .....                                                          | 251        |
| <b>HVAC WORKS .....</b>                                                                   | <b>256</b> |

|                                                                                                     |            |
|-----------------------------------------------------------------------------------------------------|------------|
| 5.1 AIR -COOLED VARIABLE REFRIGERANT FLOW SYSTEM: .....                                             | 256        |
| 5.2 THERMAL INSULATION FOR COLD SURFACES: .....                                                     | 264        |
| 5.3 AXIAL FANS FOR VENTILATION SYSTEM.....                                                          | 277        |
| 5.4 APPROVED MAKE COMPONENT/EQUIPMENT : .....                                                       | 284        |
| <b>COMPRESSOR WORKS.....</b>                                                                        | <b>290</b> |
| 6.1 SCOPE OF SUPPLY .....                                                                           | 290        |
| 6.2 CODES AND STANDARDS.....                                                                        | 293        |
| 6.3 SPECIFIC REQUIREMENTS / INSTRUCTION TO CONTRACTOR .....                                         | 293        |
| 6.4 SPECIFIC ELECTRICAL REQUIREMENT .....                                                           | 294        |
| 6.5 SPECIFIC REQUIREMENT OF I & C SYSTEM.....                                                       | 295        |
| 6.6 GUARANTEES AND PERFORMANCE REQUIREMENT .....                                                    | 299        |
| 6.7 ACCEPTANCE TEST .....                                                                           | 300        |
| 6.8 PAINTING.....                                                                                   | 300        |
| 6.9 TENDER EVALUATION AND PENALTY FACTOR.....                                                       | 300        |
| 6.10 MAINTENANCE REQUIREMENTS .....                                                                 | 301        |
| 6.11 SUMMARY OF DATA TO BE FURNISHED ALONG WITH BID AND AFTER ACCEPTANCE<br>OF PURCHASE ORDER ..... | 301        |
| 6.12 SPECIFICATION FOR AIR COMPRESSORS .....                                                        | 310        |
| 6.13 SPECIFICATION FOR WELDED UNFIRED PRESSURE VESSEL .....                                         | 323        |
| 6.14 SPECIFICATION FOR LOW VOLTAGE INDUCTION MOTORS .....                                           | 337        |
| <b>ELECTRICAL WORK .....</b>                                                                        | <b>354</b> |
| 7.1 INTRODUCTION – ELECTRICAL .....                                                                 | 354        |
| 7.2 LOW VOLTAGE SWITCHGEAR .....                                                                    | 354        |
| 7.3 POWER FACTOR CORRECTION SYSTEM.....                                                             | 365        |
| 7.4 1.1 KV GRADE CABLES AND CABLE TRAYS.....                                                        | 368        |
| 7.5 CABLE TRAYS.....                                                                                | 375        |
| 7.6 LIGHTING SYSTEM .....                                                                           | 377        |
| 7.7 EARTHING SYSTEM.....                                                                            | 392        |
| 7.8 LIGHTNING PROTECTION SYSTEM.....                                                                | 397        |
| 7.9 DIESEL GENERATORS .....                                                                         | 397        |
| 7.10 UPS SYSTEM.....                                                                                | 414        |
| 7.11 LIFTS .....                                                                                    | 429        |
| 7.12 LIST OF ACT / BYE LAWS .....                                                                   | 438        |
| 7.13 SPARES AND MAINTENANCE TOOLS AND TACKLES .....                                                 | 439        |
| 7.14 APPROVED MAKE OF ELECTRICAL COMPONENT/EQUIPMENT:.....                                          | 440        |
| <b>IBMS &amp; IT WORKS.....</b>                                                                     | <b>446</b> |
| 8.1. BUILDING MANAGEMENT SYSTEM.....                                                                | 446        |



|                                                             |            |
|-------------------------------------------------------------|------------|
| 8.2. FIRE DETECTION AND ALARM SYSTEM .....                  | 465        |
| 8.3. CLOSED CIRCUIT TELEVISION SYSTEMS .....                | 503        |
| 8.4. ACCESS CONTROL SYSTEMS .....                           | 516        |
| 8.5. IT & TELEPHONE SYSTEMS.....                            | 534        |
| 8.6. APPROVED MAKES .....                                   | 544        |
| <b>EOT CRANE WORKS .....</b>                                | <b>546</b> |
| 9.1. EOT CRANES .....                                       | 546        |
| <b>EXTERNAL SERVICES WORKS .....</b>                        | <b>548</b> |
| 10.1. APPROVED MAKE LIST- EXTERNAL SERVICES.....            | 548        |
| <b>LANDSCAPE WORKS .....</b>                                | <b>550</b> |
| 11.1. SCOPE OF WORK.....                                    | 550        |
| 11.2. GENERAL ITEMS.....                                    | 550        |
| 11.3. EARTH WORKS.....                                      | 551        |
| 11.3.1 MAJOR GRADING .....                                  | 552        |
| 11.3.2 EXCAVATION FOR FORMATION LEVELS AND TRENCHES .....   | 553        |
| 11.3.3 FINE GRADING AND SHAPING.....                        | 554        |
| 11.4. SOILS: MATERIALS AND PREPARATION.....                 | 554        |
| 11.4.1 SOILS: SUBSOIL .....                                 | 554        |
| 11.4.2 TOPSOIL MIXES .....                                  | 554        |
| 11.4.3 SOIL MIXES .....                                     | 555        |
| 11.4.4 SOIL PREPARATION AND APPLICATION OF SOIL MIXES ..... | 556        |
| 11.4.5 FERTILIZERS .....                                    | 557        |
| 11.4.6 MULCHES .....                                        | 557        |
| 11.5. SUBSOIL DRAINAGE .....                                | 558        |
| 11.5.1 SUBSOIL, FIELD DRAINS AND TRENCH DRAINS .....        | 558        |
| 11.6. SOFTSCAPE WORKS.....                                  | 559        |
| 11.7. SPECIAL CONDITION .....                               | 560        |
| 11.8. GENERAL SPECIFICATIONS .....                          | 562        |
| 11.8.1 HOLDING NURSERY .....                                | 562        |
| 11.8.2 PROVISION OF SITE UTILITIES .....                    | 563        |
| 11.8.3 LANDSCAPE DEVELOPMENT TECHNIQUE .....                | 563        |
| 11.8.4 QUALITY OF WORKMANSHIP AND MATERIALS.....            | 563        |
| 11.8.5 SITE RESPONSIBILITIES.....                           | 564        |
| 11.8.6 PLANT PROTECTION .....                               | 565        |
| 11.8.7 WORK BY MACHINE OR HAND .....                        | 566        |
| 11.8.8 NOTICE OF INTENTIONS .....                           | 566        |
| 11.8.9 HEAVY MACHINERY.....                                 | 566        |

|          |                                                                                |     |
|----------|--------------------------------------------------------------------------------|-----|
| 11.8.10  | SUBSTITUTIONS .....                                                            | 566 |
| 11.8.11  | SETTING OUT .....                                                              | 566 |
| 11.8.12  | TOOLS AND EQUIPMENT .....                                                      | 567 |
| 11.8.13  | FAILURES OF PLANTS (PRE-PRACTICAL COMPLETION) .....                            | 567 |
| 11.8.14  | PLANTS DEFECTS LIABILITY AND POST PRACTICAL COMPLETION CARE BY CONTRACTOR .... | 567 |
| 11.8.15  | SUBMITTALS.....                                                                | 567 |
| 11.8.16  | HANDLING, STORAGE AND DELIVERY .....                                           | 568 |
| 11.8.17  | PROTECTION OF WORK.....                                                        | 568 |
| 11.8.18  | REFERENCE STANDARDS .....                                                      | 568 |
| 11.9.    | PLANT MATERIALS AND PLANTING OPERATIONS .....                                  | 569 |
| 11.9.1   | TREES.....                                                                     | 570 |
| 11.9.2   | PALMS .....                                                                    | 572 |
| 11.9.3   | HEDGING PLANTS.....                                                            | 573 |
| 11.9.4   | CONTAINER GROWN PLANTS .....                                                   | 573 |
| 11.9.5   | CULTIVATION OF PLANT BEDS .....                                                | 574 |
| 11.10.   | PLANTING TECHNIQUES AND ACCESSORIES.....                                       | 574 |
| 11.10.1  | SMALL SHRUBS, HERBACEOUS, GROUND COVER AND ROOT PLANTING IN BEDS .....         | 574 |
| 11.10.2  | SHRUB PITS .....                                                               | 575 |
| 11.10.3  | TREE PITS .....                                                                | 576 |
| 11.10.4  | BACKFILLING OF PITS (TREES, SHRUBS AND CLIMBERS) .....                         | 576 |
| 11.10.5  | STAKING AND SUPPORTS .....                                                     | 576 |
| 11.10.6  | TURFING.....                                                                   | 579 |
| 11.10.7  | WATERING OF ALL PLANTS .....                                                   | 583 |
| 11.10.8  | MULCHING .....                                                                 | 583 |
| 11.10.9  | FERTILISING .....                                                              | 584 |
| 11.10.10 | DISEASE CONTROL .....                                                          | 584 |
| 11.10.11 | PLANTING INTO TURF AREAS .....                                                 | 584 |
| 11.10.12 | PROTECTION OF PLANTED AREAS .....                                              | 584 |
| 11.10.13 | MAINTENANCE PRIOR TO COMPLETION .....                                          | 584 |
| 11.11.   | MAINTENANCE WORKS.....                                                         | 585 |
| 11.11.1  | GENERAL.....                                                                   | 585 |
| 11.11.2  | MAINTENANCE OF PLANTED AREAS.....                                              | 586 |

**TECHNICAL SPECIFICATION**  
**ARCHITECTURAL WORKS**

## **ARCHITECTURE WORKS**

### **1.1 ARCHITECTURE SCOPE OF WORK**

The scope includes design, detailing, procurement, supply, construction, furnishing, testing and execution in accordance with the tender documents.

Items of work include

- Painting
- Door and Windows incl Fire Doors
- Glazing & Facade works
- Stone cladding
- Flooring and finishing
- GRC Works
- Fabrication works
- Dry Partition/Glass partition
- Ceiling Finishes
- Wall Finishes
- Waterproofing and Insulation works
- Gates including automation
- Any other works shown in the drawings but not specifically mentioned above

### **1.2 SPECIFICATIONS FOR NON-DSR ITEMS**

#### **1.2.1 EPOXY FLOORING**

##### **1.2.1.1 General**

Epoxy coating should be based on carefully selected solvent less Epoxy resin composition. It should be a 3 component system consisting of base, hardener and hard wearing quartz fillers. It should be self levelling composition and forms a very smooth, attractive hygienic, hard wearing and chemical resistant floor topping.

It should provides a joint less flooring making it dust free and is easy to clean because of smooth surface.

Chemical Resistant – It should have excellent chemical resistance to most chemicals

Wear Resistant – It should provide a tough floor topping to withstand foot and light vehicular traffic.

##### **1.2.1.2 Surface Preparation**

The long term durability of the applied Epoxy topping is dependent upon the adhesive bond achieved between the flooring material and substrate. It is most important therefore, that substrate surface is correctly prepared prior to application.

Substrate must be of sufficient strength to support loads applied through the topping. New concrete or cementitious substrates should have been placed for at least 28 days and have a moisture content of less than 5% before topping. Before application, the surface to

be coated should be free from loose particles, rust, oils, grease or earlier coatings and should be thoroughly dry. After surface is dry, all repair work like sealing of joints, cracks filling of cavities and crevices should be carried out. 5. The self levelling action is very localized and does not eradicate irregularities of level present in the original substrate. It is most important, therefore, that adequate surface preparation and repair is undertaken prior to application of flooring systems.

#### **1.2.1.3 Priming**

To be as per manufacturer's specifications.

#### **1.2.1.4 Mixing**

To be as per manufacturer's specifications.

#### **1.2.1.5 Laying**

Spread the mixture on the floor immediately to the required thickness by means of rollers and serrated trowels. The floor should be rolled by a spike roller to remove trapped air. The floor shall self level to uniform colour and smoothness.

### **1.2.2 Electro Static Dissipative [ ESD ] FLOORING**

#### **1.2.2.1 General Description**

- a. Product: Flowfresh ESD MF [Flowcrete India Pvt Ltd ]
- b. Finish: Matt
- c. Thickness: (4 mm)
- d. Colour: Buff / Cream / Mustard / Red / Green / Grey
- e. Preparatory work and application in accordance with manufacturer's instructions.

#### **1.2.2.2 Description**

Flowfresh ESD MF is an antistatic 4 mm heavy duty, chemical resistant antimicrobial treated polyurethane resin floor finish. Attractive smooth matt coloured floor finish.

#### **1.2.2.3 Substrate Requirements :**

Concrete or screed substrate should be a minimum of 25N/mm<sup>2</sup>, free from laitance, dust and other contamination. The substrate should be dry upto 75% RH as per BS 8204 and free from rising damp and ground water pressure. If no damp proof membrane is present Hydraseal DPM can be incorporated directly beneath the Flowfresh ESD MF system.

#### **1.2.2.4 SUBSTRATE PREPARATION:**

By enclosed shot blasting or scarification. Finish edges with hand tools. Cut minimum 4mm x 4mm anchorage grooves at edges, upstands, drains and doorways. Remove all residues to leave a dry and dust free open textured surface.

#### **1.2.2.5 Products Included in this System**

**Primer:** Flowprime / Scratch Coat @ 0.25kg/m<sup>2</sup>

Conductive Grid of 10 mm wide copper tape.

**Primer:** Flowprime / Scratch Coat @ 0.25 kg/m<sup>2</sup>

**Scatter:** Conductive Grade 50 @ ~2 kg/m<sup>2</sup>

Test electrical resistance when primer has cured.

**Topping:** Flowfresh ESD MF (density 1.9 kg/l) @ 7.6 kg/m<sup>2</sup>

Flowfresh ESD MF is a self-sealing finish.

#### 1.2.2.6 Conductive Grid

A network of 10 mm wide, self-adhesive, conductive copper tape is always recommended in combination with any Flowcrete antistatic flooring system. The copper tape must be applied directly onto the cured Flowprime/ Scratch Coat, 150mm in from the perimeter of the application. A further grid of tape should be applied within this area at 3 m centres. Special attention should be paid to tape areas passing over expansion or bay joints to ensure permanent electrical continuity. The applied tape matrix should be secure and fully bonded to a confirmed earth point.

#### 1.2.2.7 Installation Service

The installation should be carried out by an applicator approved by the manufacturer with a documented quality assurance scheme.

#### 1.2.2.8 Microbial / Fungal Resistance

The Polygiene antimicrobial additive incorporated into Flowfresh ESD MF provides control of most bacteria and fungi which come into contact with the floor.

#### 1.2.2.9 Environmental considerations

The finished system shall be assessed as non-hazardous to health and the environment

#### 1.2.2.10 Technical Properties

|                        |                                                                              |  |  |
|------------------------|------------------------------------------------------------------------------|--|--|
| Electrical Resistance  | 5 x 10 <sup>4</sup> – 1 x 10 <sup>8</sup> Ohms (to BS 2050)                  |  |  |
| Temperature Resistance | Tolerant up to 70°C                                                          |  |  |
| Water Permeability     | Nil – Karsten Test ( <b>impermeable</b> )                                    |  |  |
| Vapour Permeability    | ASTM E96:90 ; 5 g / m <sup>2</sup> / 24hrs ( <b>at 4 mm thick</b> )          |  |  |
| Chemical Resistance    | <b>Excellent resistance to sugars and most acids (organic and inorganic)</b> |  |  |
| Compressive Strength   | > 50 N/mm <sup>2</sup> (BS 6319)                                             |  |  |
| Flexural Strength      | 20 N/mm <sup>2</sup> (BS 6319)                                               |  |  |
| Tensile Strength       | 12 N/mm <sup>2</sup> (BS 6319)                                               |  |  |
| Complies with          | BS 8204-6/FeRFA category 7                                                   |  |  |

| <b>Speed of Cure</b> | 10°C    | 20°C   | 30°C   |
|----------------------|---------|--------|--------|
| Light traffic        | 36 hrs  | 24 hrs | 12 hrs |
| Full traffic         | 72 hrs  | 48 hrs | 24 hrs |
| Full chemical cure   | 10 days | 7 days | 5 days |

#### 1.2.2.11 MIXING:

Apply a coat of Flowprime and allow to cure.

#### **1.2.2.12 EARTHING:**

Apply 10mm wide copper tape around the perimeter of the area, 1m from the walls. Apply a 3 metre grid of copper tape within the perimeter tape. Connect the copper tape grid to earth.

#### **1.2.2.13 SECOND PRIMER:**

Apply a coat of Flowprime ESD conductive Primer and allow to cure.

#### **1.2.2.14 APPLICATION :**

Within 1 minute of mixing spread Flowfresh ESD SL using a steel bladed trowel or pin rake set to the correct depth to the required thickness. Within 3 minutes of application, roll with a spiked roller immediately after spreading use a spiked roller to release any entrapped air.

Minimum application temperature 10°C. 72 hours at 10°C. No curing membranes required.

The floor shall be prevented from unauthorized access of 36 hours for Light traffic and 72 hours for full traffic. For getting full chemical resistance the floor should be allowed to cure for 7 days.

### **1.2.3 VDF FLOORING ('TREMIX' OR EQUIVALENT)**

Providing & laying in position and compaction as specified machine mixed, plain cement concrete of grade M20 using maximum 20 mm downgraded coarse aggregate using Vacuum Dewatering procedure "TREMIX or Equivalent" including all necessary dewatering, form work, casting in panels of specified size and thickness, wherever necessary, to shape and depth as specified curing, etc., complete for any specified thickness, cutting grooves, filling joints etc.

Specification to be inclusive of

- Steel form work with steel channel sections as approved by ER/PMC, mechanical vibration using needle and screed vibrators.
- Vacuum dewatering and Curing
- Cutting mechanically the dummy joints of 6mm wide and up to 0.33 times depth within 24hours - 36 hrs after casting the slab. The dummy joints are at approx 4m x 4m grids.
- Filling the grooves for joints with approved primer and approved joint sealing compound. The joint sealant will be filed flush with PCC surface.
- The joints will be kept filled with thermocol immediately after cutting and before filling, the same shall be removed & joints cleaned thoroughly with compressed air etc as directed.
- The acceptable level difference of VDF shall be only maximum 5mm at entire length.

### **1.2.4 METAL FIRE DOORS**

#### **1.2.3.1 Scope**

This specification covers the design, supply of materials, Manufacture and installation of factory made special type of approved make steel fire doors of 1 Hour, 2 Hrs. Fire Rating and General Purpose Doors (FD-1 Hr., FD-2 Hr. & G.D.Series) of approved makes.

### **1.2.3.2 General**

The Contractor shall furnish all materials, labour, operations, equipment, tools & plant, scaffolding and incidentals necessary and required for the completion of all metal work in connection with steel doors, as called for in the drawings, specifications and bill of quantities which cover the major requirements only. Anything called for in the tender documents shall be considered as applicable to the items of work concerned. The supply and installation of additional fastenings, accessory features and other items not specifically mentioned, but which are necessary to make a complete functioning installation shall form a part of this contract.

All metal work shall be free from defects, impairing strength, durability and appearance and shall be of the best quality for purposes specified made with structural proprieties to withstand safety strains, stresses to which they shall normally be subjected to.

All fittings shall be of high quality and as specified and as per approval.

The Contractor shall strictly follow, at all stages of work, the stipulations contained in the Indian Standard Safety Code or its Equivalent British Standard and the provisions of the safety code and the provision of the safety rules as specified in the General Conditions of the Contract for ensuring safety of men and materials.

Any approval, instructions, permission, checking, review, etc., whatsoever by the PMC/AEC, shall not relieve the Contractor of his responsibility and obligation regarding adequacy, correctness, completeness, safety, strength, quality, workmanship, etc.

### **1.2.3.3 Codes and Standards**

All standards, specifications, acts, and codes of practice referred to herein shall be the latest editions including all applicable official amendments and revisions.

List of certain important Indian Standards, Acts and Codes applicable to this work is given below. However, the applicable standards and codes shall be as per but not limited to the list given below:

IS : 277 Galvanized steel sheet (plain and corrugated)

IS : 3614 Metallic and non-metallic fire check doors – Resistance test and Part – 2 performance criteria.

### **1.2.5 HOLLOW METAL FIRE DOOR ( 2 Hours Fire Rating) WITH HONEY COMB CORE**

#### **1.2.4.1 GENERAL**

Fire door shall be 2 hour fire rated and door quality shall be approved by TAC/CBRI and tested conformed to IS : 3614 Code or its Equivalent British Standard.



Unless otherwise specified, maximum size of door in this type:

- Single shutter door : 1200 mm x 2200mm
- Double shutter door : 2000 mm x 2400 mm

For doors above 2200 mm height (Single Doors) and 2400 mm height (Double Door) the options shall be:

- A man operation door of size above 2049 mm height shall be provided with a removable panel / fixed panel on top.

The construction of above panel shall be designed similar to that of a shutter in case of flush panel to match the exteriors.

#### **1.2.4.2 Frame**

##### Material

Frame to be manufactured from 1.60 mm (16 gauge) galvanised steel sheets complying with latest IS 277 Code or its Equivalent British Standard coating class zinc coating mill phosphatized.

##### Profile

Door frame profile to be double rebated of dimensions 143 mm X 57 mm (+ / - 0.3) with bending radius of 1.4 mm.

##### Manufacture

Frame to be manufactured from 1.60 mm thick galvanised steel sheet to the specified profiles and dimensions. Frames manufactured at factory shall be knock down form with butt joints for bolted assembly at site.

##### Door frame preparations

Frames to be provided with a 3 mm thick back plates on all jambs with provision for anchor bolt fixing to wall openings. All frames to have reinforcement pads for fixing of door closer, at appropriate location as per manufacturer's details.

Frames to have factory finish-pre-punched cut outs to receive specific hardware and iron mongery.

Frames to be provided with hinge plates 3 mm thick pre-drilled to receive hinges for screw mounted fixing. All cut outs including hinge plates, strike plates to have mortar guard covers from inside to prevent cement, dust ingress into cut outs at the time of grouting.

Frames to have rubber shutter silencer on strike jambs for single shutter frames and on the head jambs for double shutter frames.

##### Finish

Door frames to be suitably cleaned with solvents and etch primered for receiving primer and top coats. Door frames to be primered in zinc phosphate stoving primer (35 microns DFT). Door frames to be finished in thermo setting paint (35 microns DFT) of approved colour and make as specified.

### **1.2.4.3 Fire Door Shutter**

#### Material

Fire door shutter to be manufactured from 1.25 mm (18 gauge) galvanized sheets conforming to latest IS : 277 Code or its Equivalent British Standard coating class zinc coating, mill phosphatized.

#### Manufacture

Shutters to be press formed to 46 mm thick double skin hollow door with lock seam joints at stile edges. Shutters to have no visible screws or fasteners on either face. Internal reinforcement to be provided at top bottom and stile edges for desired fire rating.

#### Door Shutter Cores

Shutters to be provided with honeycomb kraft paper core to be bounded to the inner faces of the shutter.

#### Door shutter preparations

Shutters to be factory prepared with pre-punched cutouts and reinforcements to receive iron mongery as per final finish hardware schedule. The shutter should have an interlocking arrangement at this stile edges for flat surface on either side.

Shutters to have pre-drilled hinge plates with hinge guard covers. Shutters with locks to have concealed lock box with lock fixing brackets with pre-tapped holes.

For shutter with door closer reinforcement pads to be provided at appropriate location as per manufacturer's design.

All iron mongery preparation to have adequate reinforcement for flushes fixing at site.

#### Vision panel for Fire rated door

Vision panel to be provided with Borosilicate clear toughened glass of the thickness 6 mm for up to two hours fire rating. Glass to be fixed with clip on frames for square and rectangular vision panels and with spin turned rings for circular vision panels and Glazing Tape with one side adhesive. Vision Panels to be fixed with clip-on frames for square and rectangular Vision Panels with no visible screws. Unless otherwise specified standard sizes are 200 mm x 300 mm and 360 mm diameter.

#### Finish

Shutters to be suitably cleaned with solvents and etch primed for receiving primer and top coats. Shutters to be primed in zinc phosphate stoving primer (35 microns DFT). Shutters to be finished in thermo setting paint (35 microns DFT) of approved colour and make as specified.

### **1.2.4.4 Installation**

#### Door frame fixing

The door frames should be assembled adjacent to the place of installation as the frames are not designed for transporting in an assembled condition. After assembly it is to be ensured that all threaded preparations are covered from the back of the frame using self adhesive strip to prevent penetration of mortar back-fill into screw threads. The head

member of assembled frame shall be positioned against jambs ensuring correct alignment and secured using M8 x 20 long plated bolts together with nuts spring and flat washers.

The assembled frame shall be kept in position within the opening by means of bracing. In order to correctly position the frame against finished floor level or equalise on adjustable floor anchors where specified, shim shall be used under jambs. The frame shall be checked for squareness, alignment, twist etc. with carpenters bevel and plumb.

A tie rod shall be fixed to the frame during installation to ensure the correct dimensions between the frame rebated and the same may be removed after installation.

Where a 2nd fix application is required a shim detail is suggested to take up gap between frame and existing opening.

#### Existing masonry wall openings – Metal expansion shields

- Brace, position, level etc.
- Mark all positions of fixings on wall.
- Remove frame and drill wall to appropriate specified size.
- Fit rod anchor shells metal expansion bolts into the wall.
- Fit jamb spacer bracket into back of frame profile.
- Reposition frame back into opening and realign.
- Lightly screw CSK HD machine screws into shells, shim behind frame.
- Slowly tighten screws continually checking plumb, square etc. Finally ensure frames are not deformed as tightened.
- After fixing the frame shall be grouted with cement mortar 1:3 or Plaster of Paris or Gypsum powder as approved. Gap between frame and wall to be closed by cement pointing using cement mortar 1:3.
- Back full the frame through holes provided and insert nylon plugs.

#### Door shutter fixing

- Fix all the hardware to the door shutter like hinges, flush bolts, bolts, mortise locks, door closer, door stoppers, handles etc. with the appropriate screws and bolts supplied.
- The shutter is to be then fixed to the frame which is already installed. Align the shutter to match the hardware to the cutouts in the frame. Tighten the hinge screws.
- Application of Fire / Smoke UL 10 C / UL 1784 (2001) classified seal (for smoke check if specifically required)
- Clean door jamb rebate surfaces of all dust, oil etc. Affix self-adhesive Fire / Smoke seal on the door frame rebates as indicated by the manufacturer on hinge jambs, strike jambs, head member and sill.

The door frames should be assembled adjacent to the place of installation as the frames are not designed for transporting in an assembled condition. After assembly it is to be ensured that all threaded preparations are covered from the back of the frame using self adhesive strip to prevent penetration of mortar back-fill into screw threads. The head

member of assembled frame shall be positioned against jambs ensuring correct alignment and secured using M8 x 20 long plated bolts together with nuts spring and flat washers.

The assembled frame shall be kept in position within the opening by means of bracing. In order to correctly position the frame against finished floor level or equalise on adjustable floor anchors where specified, shim shall be used under jambs. The frame shall be checked for squareness, alignment, twist etc. with carpenters bevel and plumb.

A tie rod shall be fixed to the frame during installation to ensure the correct dimensions between the frame rebated and the same may be removed after installation.

Where a 2nd fix application is required a shim detail is suggested to take up gap between frame and existing opening.

#### Existing masonry wall openings – Metal expansion shields

- Brace, position, level etc.
- Mark all positions of fixings on wall.
- Remove frame and drill wall to appropriate specified size.
- Fit rod anchor shells metal expansion bolts into the wall.
- Fit jamb spacer bracket into back of frame profile.
- Reposition frame back into opening and realign.
- Lightly screw CSK HD machine screws into shells, shim behind frame.
- Slowly tighten screws continually checking plumb, square etc. Finally ensure frames are not deformed as tightened.
- After fixing the frame shall be grouted with cement mortar 1:3 or Plaster of Paris or Gypsum powder as approved. Gap between frame and wall to be closed by cement pointing using cement mortar 1:3.
- Back full the frame through holes provided and insert nylon plugs.

#### Door shutter fixing

- Fix all the hardware to the door shutter like hinges, flush bolts, bolts, mortise locks, door closer, door stoppers, handles etc. with the appropriate screws and bolts supplied.
- The shutter is to be then fixed to the frame which is already installed. Align the shutter to match the hardware to the cutouts in the frame. Tighten the hinge screws.
- Application of Fire / Smoke UL 10 C / UL 1784 (2001) classified seal (for smoke check if specifically required)
- Clean door jamb rebate surfaces of all dust, oil etc. Affix self-adhesive Fire / Smoke seal on the door frame rebates as indicated by the manufacturer on hinge jambs, strike jambs, head member and sill.
- 2 Hours FIRE RATED DOOR – Hardware Schedule: All hardware to be in line with door schedule drawing.

### **1.2.6 HOLLOW METAL FIRE DOOR(1 HOUR FIRE RATING) WITH HONEY COMB CORE**

### 1.2.5.1 General

Unless otherwise specified, maximum size of door in this type:

Single shutter door : 1200 mm x 2200 mm

Double shutter door : 2000 mm x 2200mm

For doors of size above 2200 mm height the options shall be:

A man operation door of size above 2049 mm height shall be provided with a removable panel / fixed panel on top with glazing or without glazing or without glazing as required.

The construction of above panel shall be designed similar to that of a shutter in case of flush panel to match the exteriors.

### 1.2.5.2 Frame

#### Material

Frame to be manufactured from 1.25 mm (18 gauge) galvanised steel sheets complying with latest IS 277 Code or its Equivalent British Standard coating class zinc coating mill phosphatized

#### Profile

Door frame profile to be single rebated of dimensions 100 mm X 57 mm (+ / - 0.3) with bending radius of 1.2 mm

#### Manufacture

Frame to be manufactured from 1.25 mm thick galvanised steel sheet to the specified profiles and dimensions. Frames manufactured at factory shall be knock down form with butt joints for bolted assembly at site.

#### Door frame preparations

Frames to be provided with a 3 mm thick back plates on all jambs with provision for anchor bolt fixing to wall openings. All frames to have reinforcement pads for fixing of door closer, at appropriate location as per manufacturer's details.

Frames to have factory finish-pre-punched cut outs to receive specific hardware and ironmongery.

Frames to be provided with hinge plates 3 mm thick pre-drilled to receive hinges for screw mounted fixing. All cut outs including hinge plates, strike plates to have mortar guard covers from inside to prevent cement, dust ingress into cut outs at the time of grouting.

Frames to have rubber shutter silencer on strike jambs for single shutter frames and on the head jambs for double shutter frames.

#### Finish

Door frames to be suitably cleaned with solvents and etch primed for receiving primer and top coats.

Door frames to be primed in zinc phosphate stoving primer (35 microns DFT).

Door frames to be finished in thermo setting paint (35 microns DFT) of approved colour and make as specified.

### **1.2.5.3 Door Shutter**

#### Material

General purpose door shutter to be manufactured from 0.80 mm (22 gauge) galvanized sheets conforming to latest IS : 277 Code or its Equivalent British Standard coating class zinc coating, mill phosphatized.

#### Manufacture

Shutters to be press formed to 46 mm thick double skin hollow door with lock seam joints at stile edges. Shutters to have no visible screws or fasteners on either face.

#### Door shutter core

Shutters to be provided with honeycomb paper cored to be bonded to the inner faces of the shutter.

#### Door shutter preparations

- Shutters to be factory prepared with pre-punched cutouts and reinforcements to receive ironmongery as per final finish hardware schedule. The shutter should have an interlocking arrangement at stile edges for flat surface on either side.
- Shutters to have pre-drilled hinge plates with hinge guard covers. Shutters with locks to have concealed lock box with lock fixing brackets with pre-tapped holes.
- All ironmongery preparation to have adequate reinforcement for flush fixing at site.
- For shutter with door closer reinforcement pads to be provided at appropriate location as per manufacturer's design.

#### Vision panel

Vision panel to be provided with Borosilicate clear toughened glass of the thickness 6 mm for up to two hours fire rating. Glass to be fixed with clip on frames for square and rectangular vision panels and with spin turned rings for circular vision panels and Glazing Tape with one side adhesive. Vision Panels to be fixed with clip-on frames for square and rectangular Vision Panels with no visible screws. Unless otherwise specified standard sizes are 200 mm x 300 mm and 360 mm diameter.

#### Finish

Shutters to be suitably cleaned with solvents and etch primed for receiving primer and top coats. Shutters to be primed in zinc phosphate stoving primer (35 microns DFT). Shutters to be finished in thermo setting paint (35 microns DFT) of approved colour and make as specified.

All hardwares to be as per the detail drawing.

### **1.2.5.4 Installation**

#### Door frame fixing

- The door frames should be assembled adjacent to the place of installation as the frames are not designed for transporting in an assembled condition. After

- assembly it is to be ensured that all threaded preparations are covered from the back of the frame using self adhesive strip to prevent penetration of mortar back-fill into screw threads. The head member of assembled frame shall be positioned against jambs ensuring correct alignment and secured using M8 x 20 long plated bolts together with nuts spring and flat washers.
- The assembled frame shall be kept in position within the opening by means of bracing. In order to correctly position the frame against finished floor level or equalise on adjustable floor anchors where specified, shim shall be used under jambs. The frame shall be checked for squareness, alignment, twist etc. with carpenters bevel and plumb.
  - A tie rod shall be fixed to the frame during installation to ensure the correct dimensions between the frame rebated and the same may be removed after installation.
  - Where a 2nd fix application is required a shim detail is suggested to take up gap between frame and existing opening.

#### Existing masonry wall openings – Metal expansion shields

- Brace, position, level etc.
- Mark all positions of fixings on wall.
- Remove frame and drill wall to appropriate specified size.
- Fit rod anchor shells metal expansion bolts into the wall.
- Fit jamb spacer bracket into back of frame profile.
- Reposition frame back into opening and realign.
- Lightly screw CSK HD machine screws into shells, shim behind frame.
- Slowly tighten screws continually checking plumb, square etc. Finally ensure frames are not deformed as tightened.
- After fixing the frame shall be grouted with cement mortar 1:3 or Plaster of Paris or Gypsum powder as approved. Gap between frame and wall to be closed by cement pointing using cement mortar 1:3.
- Back full the frame through holes provided and insert nylon plugs.

#### Door shutter fixing

- Fix all the hardware to the door shutter like hinges, flush bolts, bolts, mortise locks, door closer, door stoppers, handles etc. with the appropriate screws and bolts supplied.
- The shutter is to be then fixed to the frame which is already installed. Align the shutter to match the hardware to the cutouts in the frame. Tighten the hinge screws.
- Application of Fire / Smoke UL 10 C / UL 1784 (2001) classified seal (for smoke check if specifically required)
- Clean door jamb rebate surfaces of all dust, oil etc. Affix self-adhesive Fire / Smoke seal on the door frame rebates as indicated by the manufacturer on hinge jambs, strike jambs, head member and sill.

#### 2 Hours FIRE RATED DOOR – Hardware Schedule

All hardware to be in line with door schedule drawings.

## **1.2.7 Polycarbonate Roofing**

### **1.2.6.1 Scope**

- Solid polycarbonate plastic glazing.
- Multiwall polycarbonate plastic glazing.
- Corrugated polycarbonate plastic glazing.
- Accessories for installation of plastic glazing.
- Skylight Glazing.

### **1.2.6.2 General & Codes**

|                        |                                                                                                                                            |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| 16 CFR 1201            | Safety Standard for Architectural Glazing Materials.                                                                                       |
| ANSI Z97.1             | American National Standard for Glazing Materials Used in Buildings.                                                                        |
| ASTM D 635             | Standard Test Method for Rate of Burning and/or Extent and Time of Burning of Self-Supporting Plastics in a Horizontal Position.           |
| ASTM D 648             | Standard Test Method for Deflection Temperature of Plastics Under Flexural Load.                                                           |
| ASTM D 696             | Standard Test Method for Coefficient of Linear Thermal Expansion.                                                                          |
| ASTM D 790/ASTM D 790M | Standard Test Method for Flexural Properties of Unreinforced and Reinforced Plastics and Electrical Insulating Materials.                  |
| ASTM D 1003            | Standard Test Method for Haze and Luminous Transmittance of Transparent Plastics.                                                          |
| ASTM D 1044            | Standard Test Method for Resistance of Transparent Plastic to Surface Abrasion.                                                            |
| ASTM D 1929            | Standard Test Method for Ignition Properties of Plastics.                                                                                  |
| ASTM D 2843            | Standard Test Method for Density of Smoke from the Burning and Decomposition of Plastics.                                                  |
| ASTM D 3763            | Standard Test Method for Impact Resistance of Flat, Rigid Plastic Specimen by Means of A Striker Impacted by A Falling Weight (40 ft-lbs). |
| ASTM G 53              | Standard Practice for Operating Light and Exposure Apparatus (Fluorescent UV-Condensation Type) for Exposure of Non-Metallic Materials.    |
| QUV 313B               | Accelerated Weathering Test of Non-Metallic Materials.                                                                                     |
| ISO-9002               | International Standards Organization.                                                                                                      |

### **1.2.6.3 POLYCARBONATE SHEETING : Typical Property Values**

| Property | Test Method | Unit | Value |
|----------|-------------|------|-------|
|----------|-------------|------|-------|



|                                    |            |                   |         |
|------------------------------------|------------|-------------------|---------|
| Physical Density                   | ISO 1183   | g/cm <sup>3</sup> | 1.2     |
| Water absorption, 24 hours         | ISO 62     | mg.               | 10      |
| Water absorption, saturation /23°C | ISO 62     | %                 | 0.35    |
| Mould shrinkage                    | ASTM-D955  | %                 | 0.6-0.8 |
| Poison's ratio                     | ASTM-D638  | -                 | 0.38    |
| Mechanical                         |            |                   |         |
| Tensile stress at yield 50 mm/min  | ISO 527    | MPa               | 60      |
| Tensile stress at break 50 mm/min  | ISO 527    | MPa               | 70      |
| Tensile strain at yield 50 mm/min  | ISO 527    | %                 | 6       |
| Tensile strain at break 50 mm/min  | ISO 527    | %                 | 120     |
| Tensile modulus 1 mm/min           | ISO 527    | MPa               | 2350    |
| Flexural stress at yield 2 mm/min  | ISO 178    | MPa               | 90      |
| Flexural modulus 2 mm/min          | ISO 178    | MPa               | 2300    |
| Hardness H358/30 95                | ISO 2039/1 | MPa               | 95      |
| Impact                             |            |                   |         |
| Charpy impact, notched             | ISO 179/2C | kJ/m <sup>2</sup> | 35      |
| Izod impact, unnotched 23°C        | ISO 180/1U | kJ/m <sup>2</sup> | NB      |
| Izod impact, unnotched -30°C       | ISO 180/1U | kJ/m <sup>2</sup> | NB      |
| Izod impact, notched 23°C          | ISO 180/1A | kJ/m <sup>2</sup> | 65      |
| Izod impact, notched -30°C         | ISO 180/1A | kJ/m <sup>2</sup> | 10      |

|                                                     |            |     |           |
|-----------------------------------------------------|------------|-----|-----------|
| PHYSICAL                                            |            |     |           |
| Specific Gravity                                    | ASTM D792  | ó   | 1.20      |
| Sound Transmission, STC Rating (36" x 84")          | ASTM E9070 | ó   |           |
|                                                     | @ 0.118"   |     | 25        |
|                                                     | @ 0.177"   |     | 29        |
|                                                     | @ 0.236"   |     | 31        |
|                                                     | @ 0.375"   |     | 34        |
|                                                     | @ 0.500"   |     | 34        |
| Light Transmission (Average)                        | ASTM D1003 | %   | 88        |
| Rockwell Hardness                                   | ASTM D785  | ó   | M70, R118 |
| Chemical Resistance                                 | ANSI Z26.  | 1   | Passes    |
| MECHANICAL                                          |            |     |           |
| Tensile Strength, Ultimate                          | ASTM D638  | psi | 9,500     |
| Tensile Modulus                                     | ASTM D638  | psi | 340,000   |
| Flexural Strength                                   | ASTM D790  | psi | 13,500    |
| Flexural Modulus                                    | ASTM D790  | psi | 340,000   |
| Flexural Endurance @ 1,800 Cycles/Min, 73°F, 50% RH | ASTM D671  | psi | 1,000     |
| Compressive Strength                                | ASTM D695  | psi | 12,500    |
| Elongation                                          | ASTM D638  | %   | 110       |

|                                               |              |           |             |
|-----------------------------------------------|--------------|-----------|-------------|
| Izod Impact Strength, up to 125 mils, Notched | ASTM D256A   | ft-lbs/in | 12ñ16       |
| Drop Dart Impact Strength, 1" dia.            | dart GE Test | ft-lbs    |             |
|                                               | @ 73°F       |           | >200        |
|                                               | @ 0°F        |           | >200        |
| THERMAL                                       |              |           |             |
| Coefficient of Thermal Expansion              | ASTM D696    | in/in/°F  | 3.75 x 10-5 |
| Thermal Shrinkage                             | GE Test      | %         | 1           |
| Heat Deflection Temperature                   | ASTM D648    | °F        |             |
|                                               | @ 264 psi    |           | 270         |
|                                               | @ 66 psi     |           | 280         |
| Shading Coefficient                           | ASHRAE       | ó         |             |
|                                               | Clear        |           | 1.02        |
|                                               | Gray/Bronze  |           | 79          |
| FLAMMABILITY                                  |              |           |             |
| Horizontal Burn (Flame Spread), AEB           | ASTM D635    | in        | <1          |
| Ignition Temperature                          | ASTM D1929   | °F        |             |
|                                               |              | Flash     | 873         |
|                                               |              | Self      | 1,076       |

#### 1.2.6.4 Accessories

Profile : Aluminium custom profile 60 mm wide  
 Finish : 15 micron silver anodized  
 Flashing : Aluminium angle 35x35x1.5 thk  
 Gasket : EPDM rubber  
 Fastners : Self drilling and self tapping (SDST) screws  
 Washer : EPDM  
 Tapes : Aluminium tape roll  
 Sealant : Silicon, non stain

#### 1.2.6.5 Preparation

- Glazing channels or recesses shall be cleaned and free of obstructions, soil, debris, and other materials.
- Seal porous glazing channels or recesses with primer-sealer compatible with substrate and polycarbonate sheet materials.
- Cut polycarbonate sheet materials to exact sizes required, with clean edges free of notches; clean contact edges with solvent compatible with polycarbonate sheet materials, as specified or approved by polycarbonate sheet manufacturer.

#### 1.2.6.6 INSTALLATION

- Install plastic glazing in accordance with polycarbonate sheet manufacturer's instructions.

- Do not use glazing accessories not specified or approved by polycarbonate sheet manufacturer.

#### **1.2.6.7 CLEANING**

- Immediately after completing construction activities relating to installation of polycarbonate sheet materials, remove remainder of strippable masking from surfaces of polycarbonate sheet glazing; do not expose masking to sunlight for an extended period of time.
- Immediately after removing masking, clean glazing in accordance with polycarbonate sheet manufacturer's instructions:
- Rinse surface with lukewarm water.
- Wash surface with mild soap and lukewarm water.
- Use soft cloth or sponge gently to loosen dirt and grime; scrubbing glazing surfaces, or using squeegee on glazing surfaces, is not permitted.
- Repeat rinse as above, and wipe surface dry with soft cloth until surfaces are spotless and dry.

#### **1.2.6.8 PROTECTION OF INSTALLED PRODUCTS**

- Immediately after cleaning, cover polycarbonate sheet glazing surfaces with polyethylene sheeting, or other covering material approved by polycarbonate sheet manufacturer; secure covering in place by taping to framing members - do not tape covering to polycarbonate sheet materials.
- Protect installed glazing from damage to function or finish by subsequent construction activities.
- Repair minor damage to finishes in accordance with polycarbonate sheet manufacturer's recommendations.
- Replace glazing having damage to function, and glazing having damage to finishes

### **1.2.8 GRC [ GLASS REINFORCED CONCRETE ] WORKS**

#### **1.2.7.1 Scope**

The specifications refer to GRC [Glass Reinforced Concrete ] works in the building.

#### **1.2.7.2 Specialist Contractor**

The work specified in this section is to be undertaken by a Manufacturer who is a Member of the National Precast Concrete Association Australia, GRC Industry Group with experience in the GRC industry, which includes the production of architectural panels (or other products for which this specification is being used). With his tender, the contractor shall submit to the construction manager written evidence indicating his capability of producing panels of a reliable and consistent quality.

#### **1.2.7.3 Standards and Codes**

|               |                                                                                                            |
|---------------|------------------------------------------------------------------------------------------------------------|
| AS 3972       | Portland and blended cements.                                                                              |
| BS 1          | Portland Cement.                                                                                           |
| BS 3892       | Pulverised Fuel Ash for use in Concrete.                                                                   |
| BS 476        | Test Methods and Criteria for the Fire                                                                     |
| Part 8        | Resistance of Elements of Building Construction.                                                           |
|               | GRC Industry Group of National Precast Concrete Association Australia,                                     |
|               | A Recommended Practice – Design, Manufacture and Installation of Glass Reinforced Concrete (GRC)           |
| AS 3582.1     | Supplementary cementitious materials for use with portland and blended cement - Fly ash.                   |
| AS 1130       | Code of practice for use of fly ash in concrete.                                                           |
| AS/NZS 1170.1 | Structural design actions – Permanent, imposed and other actions.                                          |
| AS/NZS 1170.2 | Structural design actions – Wind actions.                                                                  |
| AS 1170.4     | Minimum design loads on structures (known as the SAA Loading Code) – Earthquake loads.                     |
| AS 1379       | Specification and supply of concrete.                                                                      |
| AS 3610       | Formwork for concrete.                                                                                     |
| AS 1478.1     | Chemical admixtures for concrete, mortar and grout – Admixtures for concrete .                             |
| BS 1014       | Pigments for Portland Cements and Portland Cement Products                                                 |
| BS EN 1169    | Precast Concrete Products – General Rules for factory production control of glass fibre reinforced cement. |
| BS EN 1170    | Precast Concrete Products – Test Methods Parts 1-8 for glass-fibre reinforced cement.                      |

#### **1.2.7.4 MATERIALS**

##### General & Codes

Materials used for making the GRC unit shall generally comply with relevant British and Australian Standards and Codes. Any reference to a British Standard shall mean that current at the time of going to tender.

Where materials are not fully covered by this specification or alternative materials are offered, the Contractor shall forward to the Construction Manager prior to commencing the work, details of those he proposes to use together with supporting evidence indicating that the finished product will be capable of meeting the performance requirements of this specification.

##### Alkali-Resistant Glassfibre

Glass fibre shall be an alkali-resistant, continuous filament fibre developed and formulated specifically to have high strength retention in Ordinary Portland Cement environments. The glass fibre shall have a minimum ZrO<sub>2</sub> content of 16% by weight, in accordance with internationally-recognised standards, and shall have a minimum strength retention (determined by Strand In Cement (SIC) testing) of 300 MPa (Test Method: GRCA SO 104/0184).

The producer shall provide certification from the glassfibre manufacturer to show that the glass fibre conforms to these requirements, has a history of successful use in similar matrices, and is manufactured under an internationally-recognised Quality Management system.

Suitable alkali-resistant glassfibres are “Cem-FIL“, manufactured by Saint-Gobain/Vetrotex and “NEG ARG Fibre” manufactured by Nippon Electric Glass.

#### Cement

The cement shall be Ordinary Portland Cement, supplied by a manufacturer of assessed capability to AS 3972– 1997 and BS 12 or its derivatives, and should be supported by suitable certification. Cement shall be obtained from one source throughout manufacture. Cement shall be correctly stored and kept dry to avoid deterioration.

#### Sand

Sands should be washed and dried to remove soluble matter, and to permit control of the water/cement ratio. Sand added to the mix shall not exceed 50% by weight of the total mix and sand/cement ratio shall not exceed 1:2. Sand shall be only high silica and conform to the following specification:

|                |   |                                |
|----------------|---|--------------------------------|
| Silica content | > | 967%                           |
| Water content  | < | 2%                             |
| Soluble salts  | < | 1%                             |
| Grain size     | < | 1.2 mm                         |
|                | < | 10% passing a 150 micron sieve |

Sands other than silica sands may be used subject to approval of the architect and engineer, but the producer must be able to show proof of their suitability.

#### Admixtures

The manufacturer shall ensure that any admixtures used do not have any harmful effects on the product, and are used in accordance with the manufacturers’ recommendations. The use of superplasticisers may be encouraged to keep water content of the composite to a minimum without loss of suitable working characteristics, especially the ease of attaining full compaction.

Any admixtures used, shall comply with AS 1478.

#### Pigments

Any pigments used shall conform to BS 1014. These shall be:

- Harmless to the GRC’s set and strength.
- Stable at high temperature.
- UV-resistant and alkali-resistant.

The client should recognise that some colour variation may occur, and must agree an acceptable range of variation with the producer.

#### Water

Water shall be free from deleterious matter that may interfere with the colour, setting, or strength of the concrete.

#### Mix Design

The mix shall have been determined by the manufacturer, and written confirmation of the mix design shall be submitted so the proportions shall be chosen to achieve the quality-control requirements specified herein.

#### Mould-Release Agent

The mould-release agent shall be selected by the manufacturer and approved by the architect or engineer. This should be compatible with the surface finish required for the product. Any residue shall be removed from the finished product so that this does not interfere with any joint sealants or applied finishes which may be used.

#### Formwork

The design, material and manufacture of the forms shall be consistent with the type and quality of the surface finish required from the panel, and with the tolerances specified. The forms shall be constructed such that the finished products conform to the profiles and dimensions indicated by the contract documents.

#### Support Steelwork and Fixings

- The Manufacturer will be responsible for the design, manufacture and installation of all support framing, cleats and fixings inserted into and affixed to the GRC panels, or provided for the support of the GRC panels. Fixing zones are described on the drawings, together with primary structural concrete and steelwork provided by others for use by the contractor if required.
- Fixings shall be concealed and cast into panels unless otherwise specified. They shall be of non-corrosive material and located at suitable spacings to ensure support of panels without creating undue stresses to the panels under thermal movements and/or moisture movement.
- The recommendations of the Recommended Practice – Design, Manufacture and Installation of GRC – NPCAA Publication, August 1999 (herein after called NPCAA Recommended Practice) shall be incorporated in the design of fixings.
- Steel materials and workmanship shall comply with the relevant codes, and all steel will be free from rust, loose scale, pitting and other defects.
- Fabricated steel components shall be true to line and free from twists, bends and open joints.
- All ungalvanised materials shall be thoroughly cleaned prior to fabrication, by grit blasting to Class 2 in accordance with AS 1627 Part 4 and painted with Red Oxide Zinc Chromate in two coats to a minimum dry film thickness of 80 microns.
- Fixing cleats to existing steelwork, where indicated on the GRC cladding shop drawings, shall be site-welded unless otherwise arranged with the construction manager.
- Any damage to protective coatings on steelwork, supplied as part of this contract works, shall be repaired.

### **1.2.7.5 WORKMANSHIP**

### Weighing And Batching

Dry ingredients shall be batched by weight using calibrated weighing equipment capable of an accuracy of  $\pm 2\%$  of the stated batch weight. Liquids should be weighed, volume-batched or automatically dispensed. The producer must demonstrate that the method employed will give an accuracy of  $\pm 2\%$ .

### Mixing

The cement slurry should be mixed in a high-speed shear mixer, or other high-speed mixer which can achieve a good and even dispersion of all slurry ingredients.

### Application

- Application shall be by spraying, using purpose-built equipment which allows the simultaneous deposition and uniform mixing of the glassfibre and cement matrix.
- The glassfibre and cement slurry shall be metered to the spray head at rates to achieve the desired mix proportion and glass content. These shall be checked for each spray pump at least once per day and prior to commencing spray production after each stoppage. The test shall be conducted in accordance with the method described in BS EN 1170-3. Distribution of fibre in the mix shall be controlled by the operator in such a way as to be as uniform as possible.
- Cleanliness of equipment and working areas shall be maintained at all times.

### Shape and Finish

- The panels are to be formed of GRC in moulds to achieve the profiles indicated by the architectural drawings.
- The manufacturer shall provide a means for producing a replacement panel at any time during the building contract. Moulds shall be adequately cured to eliminate shrinkage and distortion and shall be properly braced.
- The exposed face of the GRC panels surfaces shall be free of blowholes, cracks, undulation or similar imperfections.

### Manufacture

- The panels shall be manufactured by a spray technique as detailed in the NPCAA Recommended Practice or as otherwise agreed between the manufacturer and architect/engineer to an approved method.
- Spray applicators shall be experienced personnel whose proficiency meets industry standards.
- If an architectural face mix is being used, this will first be sprayed into the mould. The thickness shall generally be the minimum possible to achieve the desired finish, which will normally make it at least 20% thicker than the largest sand or aggregate being used and normally 4 mm minimum and 12 mm maximum thickness. An acrylic polymer should be used in the face mix to reduce any risk of this unreinforced layer cracking.
- If no face mix is being used, a mist coat consisting of the basic mortar composition without fibre may, if necessary, be sprayed onto the moulds to prevent fibres from being visible on the finished surface of the product. The mist

coat is intended to be just thick enough to cover mould details and surfaces so that fibres are not visible on the surface, but not so thick that crazing of this unreinforced layer may occur.

- The normal target thickness of a mist coat for non-polymer GRC is 1 mm, though the use of acrylic polymer in the mix may allow the thickness to be increased up to a maximum of 3 mm. However, it should be noted that for design purposes the thickness of the mist coat should not be considered as contributing to the strength of the GRC panel.
- Spray-up of GRC backing material shall proceed before any mist coat or face mix has set.
- The method of spraying the main body of material shall achieve the greatest possible uniformity of thickness and fibre distribution.
- Consolidation shall be by rolling and such other techniques as are necessary to achieve complete encapsulation of fibres and full compaction.
- Control of thickness shall be achieved by using a pingauge or other acceptable method. Minimum thickness of panels is recommended as 8 mm (hand-spray) and 6 mm (auto-spray).
- All hand-forming of intricate details, incorporation of formers of infill materials and over-spraying shall be carried out before the material has achieved its initial set so as to ensure complete bonding.
- Inserts shall be properly embedded into thickened, homogeneous areas of GRC. Waste material such as over-spray is not acceptable to encapsulate inserts or for bonding pads.
- Any rigid embedded items bonded to the GRC shall not create undesirable restraint to volume changes.

### Shop Drawings

- Prior to commencing manufacturing work, the manufacturer shall submit for approval detailed shop drawings showing the following information:
- layout (sectional plan and elevation) of complete wall panelling;
- full-size section of typical panel and support members;
- method of assembly and supports and fixings to the existing structure and provision to withstand imposed stresses;
- method of installation, caulking, flashing and provision for vertical and horizontal expansion;
- junction and trim to adjoining surfaces; and
- fittings and accessories,
- The submission of shop drawings shall be supported by engineering design computations to show that cladding and supports comply with the design criteria specified.

### Tolerances

The GRC elements shall be manufactured and installed to the tolerances stated in the NPCAA Recommended Practice (Section 10).

### Demoulding and Curing



- Once the initial set has taken place, GRC elements should be covered with polythene for their protection and to prevent them from drying out fully. They must not be moved again until they are ready for demoulding.
- The GRC elements must not be demoulded until they have gained sufficient strength to be removed from the mould and transported within the factory, without being overstressed.
- If the GRC elements are too large to be demoulded by hand, special demoulding sockets or loops should be embedded in the panel during manufacture, and demoulding should be assisted with a lifting frame. This procedure should be agreed with the engineer.
- During demoulding, the panels shall be uniformly supported in a manner which avoids undue stresses in the panels.
- If polymers are used in the mix to avoid wet curing, the panels should be stored under cover for a minimum of 7 days at a temperature of between 5°C and 35°C.
- If polymers are not used in the mix, curing shall be continued after demoulding under conditions which shall provide free water on the surfaces of the panels at a temperature not exceeding 50°C for a period of not less than 7 days (including the initial cure in the mould).

#### Identification of Elements

All panels shall be identified individually to indicate the panel type and date of manufacture.

At the time of preparation of shop drawings the manufacturer shall indicate his required order of delivery.

#### Handling, Transportation and Installation

The products shall be handled, transported and installed using methods which ensure that no damage or marking of architectural surfaces occurs and so that the panels are not subject to undue stress.

The safety and protection of GRC units shall be ensured throughout the whole of the contract works.

Site access and, if necessary, storage space shall be provided by the main contractor.

The main contractor shall also provide true, level and clean support surfaces and shall provide for the accurate placement and alignment of connection hardware on the structure.

#### Test Requirements

The specified glass fibre content shall be 5% by total wet weight of materials.

The GRC from which the panels are made shall have the following properties on completion of curing:

- Characteristic Modulus of Rupture (MOR) 18 MPa at 28 days.
- Characteristic Limit of Proportionality (LOP) 7 MPa at 28 days.

The value of MOR and LOP design stresses to be used should be determined by the design engineer for specific service requirements.

The minimum dry density shall exceed 1800 kg/m<sup>3</sup>.

### Tests

The following tests shall be carried out on coupons cut from the test boards in accordance with BS EN 1170 Parts 2, 4, and 5. If acrylic polymer is used in the mix, presoaking immediately prior to testing shall not be required for Modulus of Rupture or Limit of Proportionality.

- Glass Content – BS EN 1170 Part 2
- Modulus of Rupture – BS EN 1170 Part 5 (and simplified method in Part 4)
- Limit of Proportionality. – BS EN 1170 Part 5

Test boards shall be produced alongside each day's production (at least one per day for each production team). The recommended size of these sample boards is 600 x 600 mm. The test boards shall be produced with the same quality, thickness and curing as the actual panels.

Those test boards which are not required for testing should be kept for the duration of the contract, or for a period to be agreed between the manufacturer and engineer.

### Frequency of Testing

The frequency of testing shall be agreed between the architect, engineer and manufacturer.

The recommendation of BS EN 1169 is as follows:

- Glass content – tested in accordance with BS EN 1170 Part 2. Once per week for each spray team. (This is in addition to the calibration test referred to in section 3.3).
- Modulus of Rupture and Limit of Proportionality – tested in accordance with BS EN 1170 Part 5. Should be tested by the manufacturer or by a qualified laboratory as the mix design is being set-up and thereafter at least twice per year, or when the mix design is changed.
- A simplified bending strength test to determine the Modulus of Rupture (MOR) should be conducted by the manufacturer more frequently. The frequency of testing recommended by BS EN 1169 is for each 10 tonnes of GRC produced, or at least once per week.
- Water Absorption and Dry Density – tested in accordance with BS EN 1170 Part 6. As the mix design is being set-up, and then for each 10 tonnes of GRC produced, or at least once per week.

### Compliance

Compliance with glass content and the characteristic strength for both LOP and MOR shall be assumed if the following conditions are met:

- Glass Content : The glass content shall not vary from the specific amount by more than  $\pm 20\%$ .
- Modulus of Rupture and Limit of Proportionality : The characteristic MOR and LOP is defined as the value which 95 per cent of all the mean strengths of the individual test-boards shall exceed.
- Compliance with the characteristic MOR and LOP requirements shall be assumed if no single test-board mean shall be less than 85 per cent of the characteristic MOR and LOP, and the average of 4 consecutive test board results shall exceed 21 MPa (MOR), and 8 MPa (LOP).

- If any single test-board fails to meet any of the compliance requirements, the GRC at risk shall be that produced between the previous complying test board and the next complying test board.
- Where failure to comply arises from consideration of consecutive groups of four test-boards, the GRC at risk shall be that represented by the first and fourth testboards, together with all intervening material.
- Note: If different values for MOR and LOP are required for specific service requirements, these should be determined by the design engineer for the specific service requirements. The selection of unnecessarily high strength requirements may result in cost penalties.
- Dry Density : The dry density of the GRC shall exceed 1800 kg/m<sup>3</sup>.
- Non-Compliance : In the event of non-compliance, the action to be taken should be agreed between the manufacturer and the client. Due regard should be paid to the technical consequences of the non-compliance and the economic consequences of adopting remedial measures or replacing the rejected products. Account should also be taken of the safety factors incorporated in the design and also the thickness of the GRC produced, compared with the design thickness. Re-testing may be considered appropriate if it is considered that the storage conditions of the product may result in improved properties because of extended curing, or if the sampling, testing or calculation may have been at fault.
- The material at risk may be reduced by the testing of additional test boards from the same, previous, or next manufacturing periods. Testing may also be performed on GRC samples cut from the actual GRC elements at risk.

#### Weatherproofing

- Responsibility for the weatherproofing of the whole installation of GRC panels rests with the GRC manufacturer.
- The joint details shown on the drawings represent the appearance required and their minimum standard of weatherproofing acceptable.
- Joints shall be weather-sealed with closed-cell polyethylene compressible backing rods and caulked with 2-part polysulphide sealant or other approved sealant in selected colours, installed completely in accordance with the sealant manufacturer's recommendations with regard to joint dimension, priming, substrates, mixing, curing, masking, cleaning and the like.
- The GRC manufacturer shall submit details of the proposed sealant and the application recommendations for approval by the construction manager prior to commencement of the contract works.
- Joints located and indicated on the drawings are those required for sealing the GRC cladding against adjacent materials and those required for architectural purposes for division of the panels into the design modules. Should the GRC manufacturer or contractor propose to subdivide the cladding into smaller panels for ease of casting, handling and erection, additional joints may be introduced in the design, provided the location proposed is discreet. The GRC manufacturer shall submit proposed locations and designs of additional panel joints with their tender submission.

### **1.2.7.6 Other Issues**

#### Responsibility

The GRC manufacture shall be solely responsible for the design and performance of the GRC panels and their supports. Information provided on the drawings or this specification shall not affect this responsibility.

#### Guarantees

The Manufacturer shall warrant the GRC panels installed, or to be installed, against any and every defect or failure which may occur during the period of practical completion for the works arising out of any fault of the GRC cladding system, workmanship, fabrication, fixing or quality of materials used.

#### Design Criteria

- Glassfibre-reinforced wall cladding shall comply with the following:
- FINISH : Class 1 to the formwork code, smooth face suitable for high paint finish.
- DESIGN LOADS : Cladding and framing shall be designed in accordance with AS1170.
- DEFLECTIONS OF MAIN FRAME STEEL MEMBERS: The attention of the contractor is drawn to the allowance made for differential deflections between the structure at level 2 and the ground. The anticipated allowance is 30 mm. The detailing of the GRC cladding should take this into account

## **1.2.9 PARTITION WORKS**

### **1.2.8.1 Scope**

This specification covers the general requirements for fabrication and erection of wooden /aluminum / gypsum board partitions and other related works forming a part of this job, which may be required to be carried out though not specifically mentioned above. The work under this specification shall consist of furnishing of all tools, labour, materials and everything necessary for carrying out the work.

### **1.2.8.2 Applicable Codes and Standards**

- Work shall be carried out as per latest edition of Indian Standards and Code of Practices. List given here shall not be considered as conclusive and is for reference and guidance only. Any discrepancies/ conflict noticed shall be brought to the notice of Architect/Engineer in charge for direction / approval. However, as a general rule more stringent specification shall take precedence.
- IS: 287            Permissible moisture content for timber used for different purposes.
- IS: 303            Plywood for general purpose
- IS: 710            Marine plywood
- IS: 733            wrought aluminum and aluminum alloys, bars, rods and sections for general engineering purposes.

- IS: 848 Synthetic resin adhesive for plywood
- IS: 1200 Method of measurement of building and civil engineering works.
- IS: 1328 Veneered decorative plywood
- IS: 1868 Anodic coating on aluminum and its alloys.
- IS: 1948 Aluminum doors, windows and ventilators
- IS: 1949 Aluminum windows for industrial buildings
- IS: 2095 Gypsum plaster boards
- IS: 2191 Plywood face panels
- IS: 2542 Method of test for gypsum plaster
- IS: 2835 Flat transparent sheet glass
- IS: 3144 Methods of test for mineral wool thermal insulation materials
- IS: 3513 Resin treated compressed wood laminates
- IS: 3677 Unbonded rock and slag wool for thermal insulation
- IS: 4021 Timber door, window and ventilator frames
- IS: 5509 Fire retardant plywood
- IS: 5523 Methods of testing anodic coatings on aluminum
- IS: 5437 Figured rolled and wired glass
- IS: 8183 Bonded mineral wool
- IS: 13871 Powder Coatings
- BS: 2972 Methods of test for inorganic thermal insulating materials

### 1.2.8.3 Aluminium Partitions

#### Materials

- Aluminium alloy used in the manufacture of extruded sections for the fabrication of doors, windows, ventilators shall conform to designation 63400 WP of IS:733.
- Transparent sheet glass shall conform to the requirements of IS: 2835. Wired and figured glass shall be as per IS: 5437.
- Builder's hardware of fittings & fixtures shall be of the best quality from approved manufacturers.

#### Workmanship

- All aluminium partitions shall be of the type as specified in the respective items of work and of sizes as indicated in the drawings.
- All aluminium units shall be supplied with anodized/powder coated finish. The minimum anodic film thickness shall be 0.015 mm.
- Aluminium partitions shall be as described in the item of work and/or bid drawings which indicate generally the arrangement along with the overall size of the various components and weight per running meter of the extruded sections to be adopted.
- IS:1948 and IS:1949 are referred to incorporate the sizes, shapes, thicknesses and weight per running meter of extruded sections for the various components of the units. However, new sizes, shapes, thicknesses with modifications to suit snap-fit glazing clips etc. are continuously being added by various leading manufacturers of extruded sections, which are available in the market. As such, the sections of

the various components of the unit proposed by the CONTRACTOR, will be reviewed by the ENGINEER and will be accepted only if they are equal to or marginally more than that specified in the codes/ item of works.

- The framework of the partitions with mullions and transoms shall be with anodized/powder coated aluminium extruded sections of dimensions as per the item of work. Anodized/powder coated Aluminium extruded sections shall be infilled with timber of class 3 (silver oak or any other equivalent) as per IS:4021. Panels of double/single glazing/plywood shall be fixed as per details indicated in the drawing. Partitions shall be fixed rigidly between the floor and the structural columns/beams including provision of necessary shims for wedging etc. Finished work shall be of rigid construction, erected truly plumb to the lines and levels, at locations as per the construction drawings.
- Specific provisions as stipulated for steel doors, windows, ventilators shall also be applicable for this item work. Glazing beads shall be of the snap-fit type suitable for the thickness of glazing proposed as indicated in the item of work. A layer of clear transparent lacquer shall be applied on aluminium sections to protect them from damage during installation. This lacquer coating shall be removed after the installation is completed.

**TECHNICAL SPECIFICATION**

**CIVIL WORKS**

## **CIVIL WORKS**

### **2.1 RUBBLE SOLING WORK**

#### **2.1.1 Scope**

This specification covers general requirements for materials to be used for carrying out rubble soling including requirements in regard to the quality & placement of rubble soling. This also covers the compaction of surfaces for level & profile thereof.

#### **2.1.2 General**

Area receiving soling will be excavated and trimmed to the required levels, profile, gradient, if any, and the same shall be rolled / compacted thoroughly, as approved by the ENGINEER.

#### **2.1.3 Material Specification**

Stone for soling work shall be black stone of good quality of specified size with minimum size variation. It shall be free from impurities and foreign matter.

#### **2.1.4 Workmanship & Construction**

2.1.4.1 The Soling shall not be constructed on a wet surface.

2.1.4.2 Unless otherwise specified, the width of the soling stone shall be 115 mm and the finished soling course thickness shall be 115 mm.

2.1.4.3 As the laying of rubble advances the soling shall be hand packed by wedging and packing with 40-50 mm metal in the joints of the soling and driving them by hammers in place so as to fill the voids as completely as possible. This operation of hand packing shall closely follow the rubble laying. The soling shall be laid and hand packed true to grade and section and these shall be often checked by boning rods, template boards, fish line, etc. The grades, sections, etc. of soling shall correspond to those of the surfacing coming thereon. The soling thus laid shall be finished by knocking out projecting stones and filling depressions by chips to reach up to the grade and camber

2.1.4.4 The quality of the 40-50 mm metal shall be same as that specified for the soling stone and the longest dimension shall not be more than 50 mm and the shortest dimension not less than 40 mm.

#### **2.1.5 Payment**

Measurements shall be made for the finished work in square metres of the actual plan area covered with the soling stone. The rate shall include the cost of all materials, labour, plant and equipment required in all the operations and including soling stone and gravel



## **2.2 WATERPROOFING OF UG WATER TANK**

The RCC base slab & wall surface is cleaned by removing dust, dirt etc. by mechanical means. Ensure that all bolt holes and sleeves, pipe inserts have been plugged properly by using Polymer Modified Mortar (PMM). Holes are drilled for fixing of PVC nozzles at 1 mt c/c at construction joints and the same are sealed by using PMM. Further, cracks are to be opened out by making V groove and filling the same using PMM.

Thereafter Injection grouting shall be done with providing and injecting non-shrink cementations grout of flowable consistency, grouting the same under pressure in pre-drilled holes by grouting pump. 24 hours after grouting is completed, cut the nipples and seal it with Polymer Modified Mortar.

A layer of about 1 inch IPS in 1:2:4 is provided on the base floor with vata at wall & floor junctions providing proper slope towards the drain point.

On the side walls provide double coat 20 mm thick plaster in CM 1:3 with approved waterproofing admixture followed by curing for 7 days. All mortar mix to be necessarily mixed with approved waterproofing compound.

## **2.3 LIST OF APPROVED MAKES FOR CIVIL AND ARCHITECTURAL WORKS**

### **2.3.1 Scope**

1. All materials and products shall conform to the relevant standards and shall be of approved make and design. A list of manufacturers/ vendors is given in Clause 2.3.2 herein below for guidance. The Engineer shall give the approval of a manufacturer/ vendor/ only after review of the sample/ specimen. In case the same is not available in the market or in case of change in trade name, equivalent makes/ re-designated manufacturer then an equivalent approved make shall be used with the approval of Owner/ Engineer. The complete system and installation shall also be in conformity with applicable Codes & Standards and Tender specifications.
2. Only "First" class quality materials shall be used.
3. Owner reserves the right to choose any of the approved make / vendors as per this list.
4. In case of products not indicated in this list, bis marked products shall be preferred.
5. Specification of manufacturer's item shall be checked against tender item / specifications before selecting any product or brand name. In case of any discrepancy, tender item/ specifications shall prevail, and any such brand of item shall not be used which is not conforming to tender specifications even if it is listed in this list.
6. For use of material from a bis listed/ certified manufacturer, the contractor shall furnish a copy of the valid bis certificate to eil/ owner before procuring the material.

7. In case non-availability of any item/ material among approved manufacturers/ brands at a particular site/ region, alternate manufacturers/ brands conforming to BIS/ BS etc. shall be used subject to approval by owner.
8. In case of non-availability of any manufacturer among approved manufacturers at a particular site/ region, alternate manufacturer's name shall be proposed along-with required credentials for owner's approval.
9. In case of any item/ product neither covered in this list nor having A BIS specifications, the contractor shall submit the proposed item/ product along-with technical details/ specifications (as per bid), test certificates etc. And other credentials of the manufacturer for owners approval.

### 2.3.2 List of Approved Makes For Products And Materials For Civil And Architectural Works

**NOTE:** LIST OF APPROVED MAKES FOR PRODUCTS AND MATERIALS FOR CIVIL AND ARCHITECTURAL WORKS ARE INDICATED IN THE TABLE BELOW. HOWEVER, ANY OTHER MAKE WHICH IS EQUIVALENT AND MEETING THE TENDER SPECIFICATIONS ARE ALSO ACCEPTABLE WITH PRIOR APPROVAL OF THE ENGINEER.

| SR. NO. | DETAILS OF MATERIALS      | MANUFACTURER'S NAME                                                                                                      |
|---------|---------------------------|--------------------------------------------------------------------------------------------------------------------------|
| 1.      | CEMENT                    | ACC / ULTRATECH / JK / C K BIRLA / AMBUJA / BINANI / JSW / SANGHI / INDIA CEMENT.                                        |
| 2.      | WHITE CEMENT              | JK / BIRLA WHITE / TRAVANCORE CEMENT                                                                                     |
| 3.      | READY MIX CONCRETE        | ULTRATECH / ACC / RMCRIPL / JK CEMENT / UNITECH / GRASIM / LAFARGE / GODREJ & Boyce / Madras Cement / RMC Readymix (I) / |
| 4.      | REINFORCEMENT BARS        | SAIL/ TISCON/ RINL/ IISCO/ JSW                                                                                           |
| 5.      | STRUCTURAL STEEL          | SAIL/ TISCON/ RINL/ IISCO/ JSW / CHORUS                                                                                  |
| 6.      | TUBULAR STRUCTURAL STEEL  | TATA STRUCTURA                                                                                                           |
| 7.      | ANTI TERMITE TREATMENT    | CHLOROPYRIPHOSPHOROUS CHEMICAL<br>PECOPP<br>DE-NOCIL, CYNAMIDE                                                           |
| 8.      | BLOCK BOARD / FLUSH DOORS | DURA-BOARD / KIT PLY / MERINO PLY ISI MARKED / KUTTY, INDIA PLYWOOD, MYSORE PLYWOOD,                                     |
|         |                           | ALL MANUFACTURERS LISTED                                                                                                 |

| <b>SR. NO.</b> | <b>DETAILS OF MATERIALS</b>                       | <b>MANUFACTURER'S NAME</b>                                                                                                                                     |
|----------------|---------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                |                                                   | BY BIS UNDER IS:2202 (HAVING OPERATIVE AND VALID LICENSE) AT BIS WEB SITE <a href="http://www.bis.org.in/">HTTP://WWW.BIS.ORG.IN/</a>                          |
| 9.             | PLYWOOD                                           | ALL MANUFACTURERS LISTED BY BIS UNDER IS:303 (HAVING OPERATIVE AND VALID LICENSE) AT BIS WEB SITE <a href="http://www.bis.org.in/">HTTP://WWW.BIS.ORG.IN/</a>  |
| 10.            | WATERPROOF PLY                                    | GREEN PLY, GARNET, CENTURY                                                                                                                                     |
| 11.            | COMMERCIAL PLY                                    | GARNET, CENTURY, DONEAR, GREEN PLY                                                                                                                             |
| 12.            | LAMINATES                                         | ALL MANUFACTURERS LISTED BY BIS UNDER IS:2406 (HAVING OPERATIVE AND VALID LICENSE) AT BIS WEB SITE <a href="http://www.bis.org.in/">HTTP://WWW.BIS.ORG.IN/</a> |
|                |                                                   | RAMMICA INDUSTRIES; THE BOMBAY BURMAH TRADING CORPN.; GREENLAM, CENTURY, MERINO                                                                                |
| 13.            | MDF BOARDS                                        | NUCHEM LTD; MANGALAM TIMBER PRODUCTS LTD; WESTERN BIO SYSTEM LTD; BAJAJ ECO-TEC PRODUCTS LIMITED                                                               |
| 14.            | VENEER                                            | DURO, GREEN, DONEAR, CENTURY, EURO                                                                                                                             |
| 15.            | PARTICLE BOARD (PLAIN / VENEERED / PRE-LAMINATED) | ALL MANUFACTURERS LISTED BY BIS UNDER IS:3087 (HAVING OPERATIVE AND VALID LICENSE) AT BIS WEB SITE <a href="http://www.bis.org.in/">HTTP://WWW.BIS.ORG.IN/</a> |
| 16.            | PRE-LAMINATED PARTICLE BOARD                      | NOVOPAN/ MERINO/ ANCHORLAM/ BHUTAN BOARD                                                                                                                       |
| 17.            | WOODWORK POLISHING                                | ASIAN PAINTS; SHALIMAR PAINTS                                                                                                                                  |
| 18.            | TERRAZZO TILES                                    | NITCO; HINDUSTAN; NEC; BHARAT; NIMCO; GK BANSAL;                                                                                                               |
| 19.            | VITRIFIED TILES                                   | NAVEEN, MARBO GRANIT, GRANAMITE, BOSS, NITCO,                                                                                                                  |

| <b>SR. NO.</b> | <b>DETAILS OF MATERIALS</b>     | <b>MANUFACTURER'S NAME</b>                                                                                                                                                                                              |
|----------------|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                |                                 | ASIAN, RAK, EURO, SOMANY, BELL CERAMIC, KAJARIA, REGENCY, ORIENT, JOHNSON; PELICAN, VARMORA, PILKINGTON                                                                                                                 |
| 20.            | GLAZED TILES                    | ORIENT, KAJARIA, NITCO, SOMANY, BELL, JOHNSON, ASIAN, RAK, EURO, PARSHURAM POTTERY, PILKINGTON                                                                                                                          |
| 21.            | CERAMIC TILES                   | REGENCY, KAJARIA, ORIENT, BELL, SOMANY, JOHNSAON, SPARTEK, NAVEEN, BELL, VARMORA, PILKINGTON                                                                                                                            |
| 22.            | ACID / ALKALI RESISTANT TILES   | REGENCY, ENDURA, KOTHARI, CHORAMANDALAM, RUSTILE, ARCOY, PERFECT ACID WARES/ MAHAKOSHAL POTTERIES/ CHAMPION CERAMICS, GOODEARTH MINERALS                                                                                |
| 23.            | PVC TILES/ ROLLS                | ALL MANUFACTURERS LISTED (HAVING OPERATIVE AND VALID LICENSE) BY BIS AT BIS WEB SITE<br><a href="http://WWW.BIS.ORG.IN/">HTTP://WWW.BIS.ORG.IN/</a><br><br>EXCELEN BY ARMSTRONG; MARBLEX BY BHOR INDUSTRIES SHYAM VINYL |
| 24.            | PVC TILES/ ROLLS (ANTI-STATIC)  | SOLIDLG1 BY ARMSTRONG; ANSTAT BY PREMIER POLYFILMS LTD                                                                                                                                                                  |
| 25.            | RUBBER TILE FLOORING            | ECOFLEX SURFACES PVT. LTD., RUDI SPORTS SURFACES, THE FLOORSMITHS                                                                                                                                                       |
| 26.            | STAINLESS STEEL SECTIONS        | JINDAL/ SAIL/ GOLDEN                                                                                                                                                                                                    |
| 27.            | ALUMINIUM SECTIONS              | HINDALCO/ JINDAL/ MAHAVIR/ LNDAL / AJIT INDIA / ALUMILITE                                                                                                                                                               |
| 28.            | PRESSED STEEL DOORS AND WINDOWS | SKS STEEL IND., DHIMAN STEEL SUPER STEEL WINDOWS, RDG ENGINEERING, ANAND INDUSTRIES,                                                                                                                                    |

| <b>SR. NO.</b> | <b>DETAILS OF MATERIALS</b>                                                          | <b>MANUFACTURER'S NAME</b>                                                                                                                                                                                            |
|----------------|--------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                |                                                                                      | RAYMUS ENGINEERING,<br>NICOMAC, WINDOORS,<br>SHAKTIMET,<br>NCL SECOLOR, GODREJ,<br>SENTINAL, MULTIWIN                                                                                                                 |
| 29.            | ALUMINIUM DOORS AND WINDOWS                                                          | JINDAL; HINDALCO, AJIT INDIA, ALUMILITE                                                                                                                                                                               |
| 30.            | FIRE PROOF DOORS                                                                     | SHAKTIMET, SHIRKE POLYNORM,<br>VIPER BY NAVAIR<br>INTERNATIONAL, RADIANT BY<br>RDG ENGG., GANDHI<br>AUTOMATION,<br>PROMAT, GODREJ, ADHUNIK,<br>SIGNUM                                                                 |
| 31.            | INDUSTRIAL DOORS / GATES<br>(FOLDING, SLIDING, SWING<br>DOORS)                       | GANDHI AUTOMATION;<br>NICOMAC; AVIANS;                                                                                                                                                                                |
| 32.            | ROLLING SHUTTERS<br>(MANUAL / GEAR OPERATED<br>/ MOTORIZED)                          | TECHNO SYSTEMS DOOR<br>SOLUTIONS; AEGIS; SHAKTIMET;<br>GANDHI AUTOMATION;<br>DORPLUS; SWASTIK ROLLING<br>SHUTTERS; BENGAL ROLLING<br>SHUTTERS;                                                                        |
| 33.            | DOOR HARDWARE                                                                        | INGERSOL RAND, GEZE, DORMA,<br>GUARDIAN, DORSET, MAGNUM,<br>UNION, KITCH, ASAA ABLOY<br>GROUP                                                                                                                         |
| 34.            | MORTICE LOCKS WITH<br>HANDLES                                                        | GODREJ & BOYCE; EVERITE<br>AGENCIES; GOLDEN INDUSTRIES                                                                                                                                                                |
| 35.            | MISC. DOOR HARDWARE /<br>FITTINGS (HINGES, TOWER<br>BOLTS, LATCHES, STOPPERS<br>ETC. | ALL MANUFACTURERS LISTED<br>BY BIS UNDER IS:3087 (HAVING<br>OPERATIVE AND VALID<br>LICENSE) BY BIS AT BIS WEB<br>SITE <a href="http://www.bis.org.in/">HTTP://WWW.BIS.ORG.IN/</a><br><br>EVERITE; EBCO; ECIE; HARDWYN |
| 36.            | NUTS BOLTS/ SCREWS                                                                   | KUNDAN/ PUJA/ ATUL                                                                                                                                                                                                    |
| 37.            | ANODISED ALUMINIUM<br>FITTINGS                                                       | CROWN/ ALANS/ CLASSIC/<br>BHARAT/ ARGENT                                                                                                                                                                              |

| <b>SR. NO.</b> | <b>DETAILS OF MATERIALS</b>                                             | <b>MANUFACTURER'S NAME</b>                                                                                                                                                                                  |
|----------------|-------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 38.            | MILD STEEL BUTT HINGES/<br>PIANO HINGES                                 | JOLLY/ GARG/ AMIT/ASI SUPREME                                                                                                                                                                               |
| 39.            | HYDRAULIC DOOR CLOSERS<br>(OVERHEAD AND FLOOR<br>MOUNTED)               | ALL MANUFACTURERS LISTED BY<br>BIS UNDER IS:3087 (HAVING<br>OPERATIVE AND VALID<br>LIECENSE) AT BIS WEBSITE<br><a href="http://www.bis.org.in">HTTP://WWW.BIS.ORG.IN</a><br>DOORKING, , ASAA ABLOY<br>GROUP |
| 40.            | CLEAR FLOAT GLASS                                                       | AIS GLASS/ SAINT GOBAIN/<br>MODIGUARD/ PILKINGTON                                                                                                                                                           |
| 41.            | GLASS (TOUGHENED)                                                       | SAINT GOBAIN/ MODI FLOAT/<br>ASAHI FLOAT / PILKINGTON                                                                                                                                                       |
| 42.            | POLYCARBONATE SHEET                                                     | DANPALON/ ALCOX/ POLYGAL                                                                                                                                                                                    |
| 43.            | HDPE WATER SUPPLY PIPES                                                 | DURALINE/ ORIPLAST/<br>HALLMARK/ PIONEER / SUPREME                                                                                                                                                          |
| 44.            | FIRE RETARDANT PAINT                                                    | JOTUN, HILTI, AKZONOBEL,<br>ASIAN PPG, CHEMBOND<br>COATINGS; HITAKSHI SAFETY<br>SOLUTIONS; AKZO NOBEL                                                                                                       |
| 45.            | PLASTIC / ACRYLIC<br>EMULSION PAINT (INTERNAL<br>& EXTERNAL), DISTEMPER | ICI; BERGER; ASIAN PAINTS;<br>SHALIMAR; KANSAI NEROLAC;<br>JOTUN; ACROPAINTS; GODAVARI<br>PAINTS; N E PAINT UDYOG;<br>SURFA COATS                                                                           |
| 46.            | SYNTHETIC ENAMEL PAINT<br>FOR BUILDING WORKS                            | ICI; BERGER; ASIAN PAINTS;<br>SHALIMAR; KANSAI NEROLAC;<br>JOTUN; ACROPAINTS; GODAVARI<br>PAINTS; N E PAINT UDYOG;<br>SURFA COATS                                                                           |
| 47.            | WATER-PROOF CEMENT<br>PAINT                                             | ASIAN PAINTS, KILLIC NIXON<br>(SNOWCEM); GODAVATI PAINTS<br>(SUPREMECEM); ACRO PAINTS<br>(ACROCEM); SNOW EHTE<br>INDUSRIAL CORP (SUPERCCEM);<br>RAJDoot PAINTS (XTRACEM 76<br>SUPERIOR CEMENT PAINT)        |
| 48.            | DECORATIVE TEXTURED<br>PAINT                                            | LUXTURE SURFACE COATINGS<br>PVT LTD (LUXTURE); BAKELITE                                                                                                                                                     |

| <b>SR. NO.</b> | <b>DETAILS OF MATERIALS</b>                          | <b>MANUFACTURER'S NAME</b>                                                                                                                                                                                                              |
|----------------|------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                |                                                      | HYLAM LTD (HERITAGE); NCL ALLTEK & SECCOLOT LTD (ALLTEK); ACRO PAINTS LTD (ACROTEXTURES); UNITILE; SPECTRUM PAINTS; SURFA COATS, ASIAN PAINTS,                                                                                          |
| 49.            | ANTI CORROSIVE BITUMASTIC PAINT                      | ASIAN PAINTS / BERGER / J&N                                                                                                                                                                                                             |
| 50.            | PRECOATED PROFILES GI / GALVALUME / ZINCALUME SHEETS | LLYOD INSULATION<br>INTERARCH BUILDING PRODUCTS<br>MULTICOLOR STEEL PVT LTD<br>HARDCASTLE & WAUD MFG CO. LTD<br>JAPAN METAL BUILDING SYSTEM PVT LTD<br>TATA BLUESCOPE STEEL LTD<br>SHREE PRE-COATED STEEL LTD<br>CRIL                   |
| 51.            | CGI SHEETS                                           | ISPAT INDUSTRIES / SAIL / TATA STEEL /                                                                                                                                                                                                  |
| 52.            | ALUMINIUM SHEETS                                     | HINDALCO;<br>JINDAL ALUMINIUM LTD                                                                                                                                                                                                       |
| 53.            | FIBRE GLASS SHEET                                    | SIMBA FRP PVT LTD                                                                                                                                                                                                                       |
| 54.            | POLYCARBONATE SHEET                                  | GE, DANPALON,                                                                                                                                                                                                                           |
| 55.            | EPOXY COATINGS                                       | FOSROC (NITOFLOOR SL 2000 / 1000); SIKA; BUILDTECH PRODUCTS PVT LTD; CICO TECHNOLOGIES; ASIAN PPG; BASF; SUNANDA SPECIALITY CHEMICALS; CHRYSO; KOTHARI CORROSION CONTROLLERS; AKZO NOBEL; BOSTIK; APURVA INDIA LTD.; CHEMBOND COATINGS. |
| 56.            | FLOOR HARDENERS                                      | CICO; SAMCOCK CHEMICALS; PEE ESS PROCESSOR & TRADERS; IRONOTE; BASF; CHRYSO; BASF; SUNANDA SPECIALITY                                                                                                                                   |

| <b>SR. NO.</b> | <b>DETAILS OF MATERIALS</b>                      | <b>MANUFACTURER'S NAME</b>                                                                                                                                                     |
|----------------|--------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                |                                                  | CHEMICALS; FOSROC; BOSTIK; POLYFLEX COATINGS AND LININGS                                                                                                                       |
| 57.            | WATER PROOFING COMPOUNDS                         | BASF; SIKA; CICO; SUNANDA SPECIALITY CHEMICALS; FAIRMATE; PIDILITE; CHRYSO; XYPEX; IMPERMO; PENETRON; ALCHIMICA; BOSTIK; MC BOUCHIME; SURFA COATS; LIKPROOF; KRYPTON BUILDMAT; |
| 58.            | CONCRETE ADMIXTURES                              | BASF; SIKA; COCO; SUNANDA SPECIALITY CHEMICALS; FAIRMATE; PIDILITE; CHRYSO; XYPEX; IMPERMO; PENETRON; ALCHIMICA; BOSTIK; MC BOUCHIME; ACC                                      |
| 59.            | POLYSULPHIDE / POLYURETHANE / SILICON / SEALANTS | CHOWKSEY CHEMICALS<br>CICO TECHNOLOGIES<br>FOSROC; BASF; SIKA; PIDILITE; CHEMETALL-RAI; CHRYSO; BOSTIK;                                                                        |
| 60.            | BITUMEN SEALANT                                  | STP                                                                                                                                                                            |
| 61.            | CONSTRUCTION CHEMICALS                           | BASF; SIKA; COCO; SUNANDA SPECIALITY CHEMICALS; FAIRMATE; PIDILITE; CHRYSO; XYPEX; IMPERMO; PENETRON; ALCHIMICA; BOSTIK; MC BOUCHIME; ACC.                                     |
| 62.            | ELECTRO-FORGED GRATING                           | GREATWELD GRATINGS PVT LTD<br>INDIA GRATINGS PVT LTD                                                                                                                           |
| 63.            | FALSE / RAISED FLOORING                          | UNITED INSULATION<br>LLOYD INSULATIONS<br>MULTIFLOORS<br>A R BROTHERS<br>BESTLOCKS SYSTEM & CONCEPTS<br>DG FLOOR<br>UNIFLOOR                                                   |



| <b>SR. NO.</b> | <b>DETAILS OF MATERIALS</b>    | <b>MANUFACTURER'S NAME</b>                                                                                                            |
|----------------|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| 64.            | GYPSUM BOARD                   | SAINT-GOBAIN GYPROC INDIA LTD<br>LAFARGE<br>DRYTECH                                                                                   |
| 65.            | UNDER-DECK INSULATIONS         | BEKELITE HYLAM LTD<br>LLOYD INSULATION<br>UP TWIGA FIBRE GLASS LTD<br>ROCKWOOL INDIA LTD                                              |
| 66.            | OVER-DECK INSULATIONS          | LLOYD INSULATION<br>UP TWIGA FIBRE GLASS LTD<br>ROCKWOOL INDIA LTD<br>BEST PLASTRONICS                                                |
| 67.            | PVC WATER STOPS                | OMAI PLASTICS, BASECON PASK,<br>ASIAN ENGG PRODUCTS,<br>CAPRIHANS INDIA LTD, R.C<br>ENTERPRISES, FIXOPAN,<br>WATERSEAL INDIA LIMITED. |
| 68.            | EXPANSION JOINT BOARDS         | SHALITEX, STP LTD, LLLOYD<br>INSULATION, SUPREME<br>INDUSTIES                                                                         |
| 69.            | WATER BARS                     | HYDROTITE, BASF,<br>HYDROSWELL                                                                                                        |
| 70.            | GROUT                          | BASF, FOSROC, SUNANDA<br>SPECIALITY COATINGS, BOSTIK,<br>SIKA,                                                                        |
| 71.            | PVC COVER BLOCKS               | ISHITA ENTERPRISES                                                                                                                    |
| 72.            | APP MEMBRANE                   | LLOYD INSULATIONS<br>BUILDTECH PRODUCTS PVT LTD<br>CICO; SIKA; SHALIMAR TAR<br>PRODUCTS;<br>IWL INDIA LTD,<br>PURE LEATHERS PVT LTD   |
| 73.            | EPDM GASKETS                   | ANAND/ ROOP/ BOHRA/ HANU                                                                                                              |
| 74.            | PARQUET FLOOR                  | NEMO/ PRIMA/ PERGO                                                                                                                    |
| 75.            | MINERAL FIBRE BOARD<br>CEILING | LLOYD/ NITTOBO/ ARMSTRONG /<br>RAMCO                                                                                                  |

| <b>SR. NO.</b> | <b>DETAILS OF MATERIALS</b>    | <b>MANUFACTURER'S NAME</b>                                                                                             |
|----------------|--------------------------------|------------------------------------------------------------------------------------------------------------------------|
| 76.            | GYPSUM BOARD                   | SAINT GOBAIN, LAFARGE                                                                                                  |
| 77.            | WEATHER SILICON MAKE AND GRADE | DOW CORNING/ MOMENTIVE (GE)                                                                                            |
| 78.            | ADHESIVES                      | BAL, LATICRETE, KERAKOLL, PIDILITE                                                                                     |
| 79.            | FIRE SMOKE SEAL                | HILTI, CFS, SPWB JOINTS SPRAY                                                                                          |
| 80.            | AAC BLOCKS                     | BILT INDUSTRIES PVT. LTD., AEROCON, SIPOREX INDIA LIMITED, XTRALITE                                                    |
| 81.            | ACOUSTIC INSULATION            | U.P. TWIGA LTD. LLOYD, SAINT GOBAIN, ECOPHONE                                                                          |
| 82.            | ANCHOR FASTENERS/ BOLTS        | HILTI, FISCHER, HALFEN                                                                                                 |
| 83.            | TENSILE FABRIC SYSTEM          | FERRARI, MEHLER, MAKMAX                                                                                                |
| 84.            | MASKING TAPES                  | 3M, SUN CONTROL/ WONDER POLYMER                                                                                        |
| 85.            | INTERLOCKING CONCRETE BLOCKS   | VYARA TILES PVT. LTD.. SUPER DECORATIVE FLOORINGS PVT. LTD., SAI ENTERPRISES,HINDUSTAN TILES, NIMCO PREFAB,R.K. TILES. |
| 86.            | ESD FLOORING                   | FLOWCRETE, SIKA, FOSROC                                                                                                |
| 87.            | FIBER CEMENT BOARD             | RAMCO , EVEREST                                                                                                        |

**TECHNICAL SPECIFICATION**

**PLUMBING WORKS**

## **PLUMBING WORKS**

### **3.1 SCOPE**

- 3.1.1 This specification covers the general requirements of providing and laying water mains and water supply piping, providing and fixing sanitary fixtures and piping and providing and laying drainage lines.
- 3.1.2 The Work shall be carried out in accordance with the drawings and designs as would be issued to the Contractor by the Engineer duly signed and stamped by him. The Contractor shall not take cognizance of any drawings, designs, specifications, etc. not bearing Engineer's signature and stamp. Similarly the Contractor shall not take cognizance of instructions given by any other Authority except the instructions given by the Engineer in writing.
- 3.1.3 The Work shall be executed and measured as per metric dimensions given in the Schedule of Quantities, drawings, etc.
- 3.1.4 The Contractor shall acquaint himself fully with the partial provisions for supports that may be available in the structure and utilise them to the extent possible. In any case the Contractor shall provide all the supports regardless of provisions that have been already made. Nothing extra shall be payable for situations where bed plates (for supports) are not available or are not useful.
- 3.1.5 The Contractor shall incorporate seismic considerations of anchoring and isolation in the design of the systems as per the requirements of the different equipment.
- 3.1.6 Shop coats of paint that may be damaged during shipment or erection shall be cleaned off with mineral spirits, wire brushed and spot primed over the affected areas, then coated with paint to match the finish over the adjoining shop painted surface.
- 3.1.7 In addition to the sectional testing carried out during the construction, the Contractor shall test the entire installation after connections to the overhead tanks or pumping system or mains. He shall rectify all leakage and shall replace all defective materials in the system. Any consequential damage done to the building, furniture and fixtures on account of Contractor's carelessness, like open or burst pipes or failure of fittings during testing and commissioning shall be made good by the Contractor at no additional cost.

### **3.2 SCAFFOLDING**

- 3.2.1 Only steel tube scaffolding of approved design shall be used for all works. The scaffold structure shall comply with the requirements of IS: 4014 and IS: 3696. An independent tied scaffold (double scaffold), which has two lines of standards, shall be provided with the inner line kept at least one board clear of the finished face with extended transoms, or hop up baskets to carry an inside board. Diagonal braces shall not prevent the material being moved along the scaffold run. The

scaffolding shall be suitably packed at the ends to prevent damage to the finished work.

### **3.3 PROTECTION**

- 3.3.1 Protection against damage: Care shall be taken to avoid damage from any cause at all stages. Packing pieces used for protection shall not disfigure or otherwise permanently mark the Works.
- 3.3.2 Surface protection shall be afforded by careful handling and the avoidance of the use of hooks, crowbars, or other implements that are likely to damage the works.
- 3.3.3 During installation of piping, open end of pipe shall be protected with temporary cover to prevent dust or other materials entering it.
- 3.3.4 Protection during construction: Decorative surfaces shall be carefully protected during construction by providing a temporary cover.
- 3.3.5 Protection of finished work: At all stages of the Contract it is essential that all works are properly protected.
- 3.3.6 Suitable packing shall be used to ensure that scaffolding does not damage erected stone, marble, granite or other finished works.
- 3.3.7 Any disfigurement, discolouration or imperfection whatsoever due to any reason shall not be accepted and the Contractor shall either remedy the same or redo the work at no extra cost. The decision of the Engineer as to whether any work either in whole or in part is acceptable or not shall be final and binding on the Contractor.

### **3.4 GUARANTEE**

- 3.4.1 The Contractor shall guarantee and undertake to maintain and rectify the various components of the Plumbing work installed by him for successful performance for a period as indicated elsewhere in the tender/ contract document. The Contractor shall indemnify the Engineer for a similar period against any damage to property and injury to persons on account of any defective work or maintenance carried out by the Contractor. All sanitary wares shall be guaranteed for a period of 5 years.
- 3.4.2 All CP fittings shall be guaranteed for a minimum period of 5 years.

### **3.5 APPLICABLE CODES, STANDARDS AND PUBLICATIONS –**

- 3.5.1 All equipment, supply, erection, testing and commissioning shall comply with the requirements of Indian Standards and code of practices given below as amended till date. All equipment and material being supplied by the Contractor shall meet the requirements of IS and other Codes/ Publications as given below.

|               |                                                                                     |
|---------------|-------------------------------------------------------------------------------------|
| SP: 6 (1)     | Structural steel sections.                                                          |
| IS: 325 :1996 | Three phase induction motors.                                                       |
| IS: 554 :1999 | Dimensions for pipe threads where pressure tight joints are required on the threads |
| IS:694 :2010  | PVC insulated cables for working voltages up to and including 1100 V.               |
| IS: 779 :1994 | Specification for water meters (domestic type).                                     |

|                        |                                                                                                                                                     |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| IS: 800 :2007          | Code of Practice for general construction in steel.                                                                                                 |
| IS: 1068 :1993         | Electroplated coatings of nickel plus chromium and copper plus nickel plus chromium.                                                                |
| IS: 1172 :1993         | Code of Basic requirements for water supply drainage and sanitation.                                                                                |
| IS: 1367 (Part 1):2002 | Technical supply conditions for threaded steel fasteners: General Requirements.                                                                     |
| IS: 1367 (Part 2):2002 | Technical supply conditions for threaded steel fasteners: Tolerances for fasteners – Bolts, screws, studs and nuts – Product Grades A, B and C.     |
| IS: 1554 (Part 1):1988 | PVC insulated (heavy duty) electric cables: For working voltages up to and including 1100 V.                                                        |
| IS: 1554 (Part 2):1988 | PVC insulated (heavy duty) electric cables: For working voltages from 3.3 kV up to and including 11 kV.                                             |
| IS: 1726 :1991         | Specification for cast iron man hole covers and frames.                                                                                             |
| IS: 1742 :1983         | Code of practice for building drainage.                                                                                                             |
| IS: 2064 :1993         | Selection, installation and maintenance of sanitary appliances - Code of practice.                                                                  |
| IS: 2065 :1983         | Code of practice for water supply in buildings.                                                                                                     |
| IS: 2373 :1981         | Specification for water meters (bulk type).                                                                                                         |
| IS: 2379 :1990         | Colour code for identification of pipelines.                                                                                                        |
| IS: 2527 :1984         | Code of practice for fixing rain water gutters and down pipes for roof drainage.                                                                    |
| IS: 2629 :1985         | Recommended practice for hot dip galvanizing on iron and steel.                                                                                     |
| IS: 4985:2000          | Unplasticised PVC pipes for potable water supplies - specification.                                                                                 |
| IS: 5329 : 1983        | Code of practice for sanitary pipe work above ground for buildings.                                                                                 |
| IS: 5455 : 1969        | Cast iron steps for manholes.                                                                                                                       |
| IS: 6159:1998          | Recommended practice for design and fabrication of material prior to galvanising.                                                                   |
| IS: 7558:1974          | Code of practice for domestic hot water installations.                                                                                              |
| IS: 8321               | Glossary of terms applicable to plumbing work.                                                                                                      |
| IS: 9668:1990          | Maintenance of water supplies and fire fighting.                                                                                                    |
| IS: 9842:1994          | Preformed fibrous pipe insulation.                                                                                                                  |
| IS: 11149:1984         | Rubber Gaskets.                                                                                                                                     |
| IS: 12251              | Code of practice for drainage of building basements.                                                                                                |
| BS: 5572               | Code of practice for sanitary pipe work.                                                                                                            |
| BS: 6700 :2006         | Specification for design, installation, testing and maintenance of services supplying water for domestic use within buildings and their curtilages. |
| BS: 8301               | Code of practice for building drainage.                                                                                                             |
| BSEN274                | Sanitary tap ware, waste fittings for basins, bidets and baths. General technical specifications.                                                   |

|                         |                                                                                                               |
|-------------------------|---------------------------------------------------------------------------------------------------------------|
| IS: 458 :2003           | Specification for precast concrete pipes(with and without reinforcement).                                     |
| IS:651 :2007            | Salt glazed stoneware pipes and fittings.                                                                     |
| IS: 1239 (Part 1) :2004 | Steel tubes, tubulars and other wrought steel fittings: Steel tubes.                                          |
| IS: 1536:2001           | Centrifugally cast (spun) iron pressure pipes for water, gas and sewage.                                      |
| IS: 1538 :1993          | Cast iron fittings for pressure pipes for water, gas and sewage.                                              |
| IS: 1729:2002           | Sand cast iron spigot and socket soil, waste and ventilating pipes, fitting sand accessories.                 |
| IS: 1879:2010           | Malleable cast iron pipe fittings.                                                                            |
| IS: 1978 :1982          | Line pipe.                                                                                                    |
| IS: 1979 :1985          | High test line pipe.                                                                                          |
| IS: 2501 :1995          | Copper tubes for general engineering purposes.                                                                |
| IS: 2643 (Part 1):2005  | Dimensions for pipe threads for fastening purposes: Basic profile and dimensions.                             |
| IS: 2643 (Part 2) 2005  | Dimensions for pipe threads for fastening purposes: Tolerances.                                               |
| IS: 2643 (Part 3)2005   | Dimensions for pipe threads for fastening purposes: Limits of sizes.                                          |
| IS: 3468 :1991          | Pipe nuts.                                                                                                    |
| IS: 3589 :2001          | Seamless or electrically welded steel pipes for water, gas and sewage (168.3 mm to 2032 mm outside diameter). |
| IS:3989 :1984           | Centrifugally cast (spun) iron spigot and socket soil, waste and ventilating pipes, fittings and accessories. |
| IS: 4346 :1982          | Specifications for washers for use with fittings for water services.                                          |
| IS: 4711                | Methods for sampling steel pipes, tube sand fittings.                                                         |
| IS: 6392                | Steel pipe flanges.                                                                                           |
| IS: 6418                | Cast iron and malleable cast iron flanges for general engineering purposes.                                   |
| IS: 7181                | Specification for horizontally cast iron double flanged pipes for water, gas and sewage.                      |
| IS: 778                 | Specification for copper alloy gate, globe and check valves for water works purposes.                         |
| IS: 780                 | Specification for sluice valves for water works purposes (50 mm to 300 mm size).                              |
| IS: 1703 2000           | Specification copper alloy float valves (horizontal plunger type) for water supply fittings.                  |
| IS: 2906 2000           | Specification for sluice valves for water works purposes (350 mm to 1200 mm size).                            |
| IS: 3950 :1979          | Specification for surface boxes for sluice valves.                                                            |
| IS: 5312 (Part 1)2004   | Specification for swing check type reflux (non return) valves: Single door pattern.                           |

|                                 |                                                                                                                                                      |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| IS: 5312 (Part 2):2004          | Specification for swing check type reflux (non return) valves: Multidoor pattern.                                                                    |
| IS: 13095 :1991                 | Butterfly valves for general purposes.                                                                                                               |
| IS: 771 (Parts 1 to 3)1978-1985 | Specification for glazed fire clay sanitary appliances.                                                                                              |
| IS: 774 2004                    | Specification for flushing cistern for water closets and urinals (other than plastic cistern).                                                       |
| IS: 781 1984                    | Specification for cast copper alloy screw down bib taps and stop valves for water services.                                                          |
| IS: 1700                        | Specification for drinking fountains.                                                                                                                |
| IS: 2326 1987                   | Specification for automatic flushing cisterns for urinals (other than plastic cisterns).                                                             |
| IS: 2548 (Part 1)1996           | Specification for plastic seats and covers for water closets: Thermoset seats and covers.                                                            |
| IS: 2548(Part 2) 1996           | Specification for plastic seats and covers for water closets: Thermoplastic seats and covers.                                                        |
| IS: 2556 (Part 1)2004           | Specification for vitreous sanitary appliances (vitreous china): General requirements.                                                               |
| IS: 2556 (Part 2)2004           | Specification for vitreous sanitary appliances (vitreous china): Specific requirements of wash down water closets.                                   |
| IS: 2556 (Part 3)2004           | Specification for vitreous sanitary appliances (vitreous china): Specific requirements of squatting pans.                                            |
| IS: 2556 (Part 4)2004           | Specification for vitreous sanitary appliances (vitreous china): Specific requirements of wash basins.                                               |
| IS: 2556 (Part 6. Sec 2)1995    | Specification for vitreous sanitary appliances (vitreous china): Specific requirements of urinals, Section 2 Half stall urinals.                     |
| IS: 2556 (Part 6, Sec 4)1995    | Specification for vitreous sanitary appliances (vitreous china): Specific requirements of urinals, Section 4 Partition slabs.                        |
| IS: 2556 (Part 6, Sec 5)1995    | Specification for vitreous sanitary appliances (vitreous china): Specific requirements of urinals, Section 5 waste fittings.                         |
| IS: 2556 (Part 6, Sec 6)1995    | Specification for vitreous sanitary appliances (vitreous china): Specific requirements of urinals, Section 6 Water spreaders for half stall urinals. |
| IS: 2556 (Part 7)2004           | Specification for vitreous sanitary appliances (vitreous china): Specific requirements of half round channels.                                       |
| IS: 2556 (Part 8)2004           | Specification for vitreous sanitary appliances (vitreous china): Specific requirements of siphonic wash down water closets.                          |
| IS: 2556 (Part 11)2004          | Specification for vitreous sanitary appliances (vitreous china): Specific requirements for shower rose.                                              |
| IS: 2556 (Part 12)2004          | Specification for vitreous sanitary appliances (vitreous china): Specific requirements of floor traps.                                               |



|                         |                                                                                                                    |
|-------------------------|--------------------------------------------------------------------------------------------------------------------|
| IS: 2556 (Part 15):2004 | Specification for vitreous sanitary appliances (vitreous china): Specific requirements of universal water closets. |
| IS: 2717 :1979          | Glossary of terms relating to vitreous enamel ware and ceramic metal systems.                                      |
| IS: 2963 :1979          | Specifications for copper alloy waste fittings for wash basins and sinks.                                          |
| IS: 3311 :1979          | Specification for waste plug and its accessories for sinks and wash basins.                                        |
| IS: 5961 :1970          | Specification for cast iron gratings for drainage purposes.                                                        |
| IS: 6249 :1999          | Specification for flush valves and fittings for marine use.                                                        |
| IS: 6411:1985           | Specification for gel coated glass fibre reinforced polyester resin bath tubs.                                     |
| IS: 8931:1993           | Specification for copper alloy fancy single taps, combination tap assembly and stop valves for water services.     |
| IS: 9758 :1981          | Specification for flush valves and fitting for water closets and urinals.                                          |

### **3.6 QUALITY ASSURANCE AND QUALITY CONTROL**

- 3.6.1 The Work shall conform to high standards of design and workmanship, shall be structurally sound and aesthetically pleasing. Quality standards prescribed shall form the backbone for the Quality Assurance and Quality Control system.
- 3.6.2 At the site level the Contractor shall arrange the materials, their stacking/ storage in an appropriate manner to ensure quality. Contractor shall provide equipment and manpower to test continuously the quality of materials, assemblies, etc. as directed by the Engineer. The test shall be conducted continuously and the result of tests maintained. In addition the Contractor shall keep appropriate tools and equipment for checking alignments, levels, slopes and evenness of surface.
- 3.6.3 The Engineer shall be free to carry out tests as may be considered necessary by him at his sole discretion, from time to time, in addition to those specified in this document. The Contractor shall provide the samples and labour for collecting the samples. Nothing extra shall be payable to the Contractor for samples or for the collection of the samples.
- 3.6.4 The test shall be conducted at the site laboratory that may be established by Engineer or at any other Standard Laboratory selected by Engineer.
- 3.6.5 The Contractor shall transport the samples to the laboratory for which nothing extra shall be payable. In the event of Contractor failing to arrange transportation of the samples in proper time Engineer shall have them transported and recover at two times the actual cost from the Contractor's bills.
- 3.6.6 Testing charges shall be borne by the Contractor.
- 3.6.7 Testing may be witnessed by the Contractor or his authorised representative. Whether witnessed by the Contractor or not, the test results shall be binding on the Contractor.

### **3.7 SANITARY AND OTHER APPLIANCES**

#### **3.7.1 SCOPE OF WORK**

- a) Without restricting to the generality of the foregoing, sanitary and other appliances shall inter-alia include the following: All Sanitary appliances and fittings shall be as per Green Rating for Integrated Habitat Assessment (GRIHA) Rating 2015.
- b) Sanitary appliances and fixtures for toilets.
- c) Chromium plated brass fittings.
- d) Accessories e.g. towel rods, toilet paper holders, towel rails, coat hooks, etc.
- e) Drinking water dispenser , etc
- f) Whether specifically indicated or not the Contractor shall provide for all appliances and fixtures, all fixing devices, nuts, washers, teflon tape, sealant, cement, brackets, supports, paints, connectors, Chromium Plated (CP) riser pipes, adapters, bolts, screws, hangers, etc., as required.
- g) All exposed pipes within toilets and near appliances/ fixtures shall be of CP brass or copper unless otherwise specified.

#### **3.7.2 GENERAL REQUIREMENTS**

- a) All materials shall be new and of quality conforming to specifications and subject to the approval of the Engineer. Wherever particular makes are mentioned, the choice of selection shall remain with the Engineer.
- b) All appliances, fixtures and fittings shall be provided with all such accessories as are required to complete the item in working condition whether specifically mentioned or not in the Schedule of Quantities, specifications, and drawings. Accessories shall include proper fixing arrangement, brackets, nuts, bolts, washers, screws and required connection pieces.
- c) Fixing screws shall be half round head CP brass screws, with CP brass washers unless otherwise specified.
- d) Porcelain sanitary ware shall be glazed vitreous china of first quality free from warps, cracks and glazing defects conforming to IS: 2556. The choice of the colour of the Sanitary ware shall be that of the Engineer and nothing extra shall be payable to the Contractor for fixing of Sanitary ware of any colour.
- e) Sinks for Kitchen shall be of stainless steel or as specified in the Schedule of Quantities.
- f) CP fittings shall be cast brass CP of the best quality approved by the Engineer.
- g) If Supply of sanitary appliances, fixtures and fittings are in Owner's scope, Contractor shall ensure that no damages occur to the same during shifting, transportation, installation and successful handing over. If any damage occurs, the same shall be replaced by the Contractor at his own cost.
- h) All appliances, fittings and fixtures shall be fixed in a neat workmanlike manner true to level and to heights shown on the drawings and in accordance with the manufacturer's recommendations. Care shall be taken

to fix all inlet and outlet pipes at correct positions. Faulty locations shall be made good and any damage to the finished floor, tiling, plaster, paint, insulation or terrace shall be made good by the Contractor at his own cost.

- i) All materials shall be rust proofed; materials in direct or indirect contact shall be compatible to prevent electrolytic or chemical (bimetallic) corrosion.
- j) Sanitary appliances, subject to the type of appliance and specific requirements, shall be fixed in accordance with the relevant standards and the following:
- k) Contractor shall, during the entire period of installation and afterwards protect the appliances by providing suitable cover or any other protection in order to absolutely prevent any damage to the appliances until satisfactory handing over. (The original protective wrapping shall be left in position for as long as possible).
- l) The appliance shall be placed in correct position or marked out in order that pipe work can be fixed or partially fixed first.
- m) The appliance shall be fixed in a manner such that it will facilitate subsequent removal, if necessary.
- n) All appliances shall be securely fixed. Manufacturers' brackets and fixing methods shall be used wherever possible. Compatible rust proofed fixings shall be used. Fixing shall be done in a manner that minimizes noise transmission.
- o) Appliances shall not be bedded (e.g. WC pans and pedestal units) in thick strong mortar that could crack the unit (e.g. a ceramic unit).
- p) Pipe connections shall be made with de-mountable unions. Pipe work shall not be fixed in a manner that it supports or partially supports an appliance.
- q) Appliances shall be fixed so that water falls to the outlet (e.g. baths).
- r) All appliances shall be secured as per the recommendations of manufacturer.
- s) Appliances shall be fixed true to level firmly fixed to anchor or supports provided by the manufacturer and additional anchors or supports where necessary.
- t) Sizes of Sanitary fixtures given in the Specifications or in the Schedule of Quantities are for identification with reference to the catalogues of makes considered. Dimensions of similar models of other makes may vary within +10% and the same shall be provided and no claim for extra payment shall be entertained nor shall any payment be deducted on this account.

### **3.7.3 URINAL PARTITIONS**

- a) Urinal partitions shall be Granite /white glazed vitreous china of size specified in the Schedule of Quantities.
- b) Porcelain partitions shall be fixed at proper heights with CP brass bolts, anchor fasteners and MS clips as recommended by the manufacturer and directed by the Engineer.

#### **3.7.4 WASH BASIN**

- a) Wash basins shall be white glazed vitreous china of size, shape and type specified in the Schedule of Quantities.
- b) Each basin shall be provided with painted MS angle or CI brackets and clips and the basin securely fixed to wall. Placing of basins over the brackets without secure fixing shall not be accepted. The MS angle shall be provided with two coats of red oxide primer and two coats of synthetic enamel paint of make, brand and colour as approved by the Engineer.
- c) Each basin shall be provided with 32 mm dia. CP waste with overflow, pop-up waste or rubber plug, CP angle valve, CP riser pipe with connectors/ adaptors and CP brass chain as specified in the Schedule of Quantities, 32 mm dia. CP brass bottle trap with CP pipe to wall flange.
- d) Wash basin shall be provided with hot and cold water mixing fitting or as specified in the Schedule of Quantities.
- e) Basins shall be fixed at proper heights as shown on drawings. If height is not specified, the rim level shall be 790 mm from finished floor level or as directed by the Engineer.

#### **3.7.5 SINKS**

- a) Sinks shall be stainless steel or any other material as specified in the Schedule of Quantities.
- b) Each sink shall be provided with painted MS or CI brackets and clips and securely fixed. Counter top sinks shall be fixed with suitable painted angle iron brackets or clips as recommended by the manufacturer. Each sink shall be provided with 40 mm dia. CP waste, CP angle valve, CP riser pipe with connectors/ adaptors and rubber plug with CP brass chain as given in the Schedule of Quantities. The MS angle shall be provided with two coats of red oxide primer and two coats of synthetic enamel paint of make, brand and colour as approved by the Engineer.
- c) Supply fittings for sinks shall be deck mounted CP swivel faucets with or without hot and cold water mixing fittings as specified in the Schedule of Quantities. These shall be measured and paid for separately.

#### **3.7.6 SHOWER SET**

Shower set shall comprise of two CP brass concealed stop cocks, four/ five way auto-diverter, adjustable type overhead shower, all with CP wall flanges of approved quality all as specified in the Schedule of Quantities. Bath spout, shower head/ rose, hand showers and pop up wastes shall also be provided wherever specified.

Wall flange shall be kept clear off the finished wall. Wall flanges embedded in the finishing shall not be accepted.

#### **3.7.7 DRINKING WATER FOUNTAIN**

It shall have built-in RO Filtration and UV System. Drinking water fountain shall be wall mounting type made of stainless steel or any other material as given in the Schedule of Quantities. The drinking water fountain shall be with anti-squirt bubble less, self closing valve type with automatic volume regulator. The drinking water fountain shall be provided with an anti-splash back and integral strainer with 32 mm or 40 mm cast brass trap.

### **3.7.8 MEASUREMENT AND RATES**

Sanitary fixtures (Porcelain ware and CP fittings) shall be measured by numbers. Rate for providing and fixing of sanitary fixtures, accessories, shall include all items, and operations stated in the respective specifications and Schedule of Quantities and nothing extra is payable.

Rates for all items under specification Clauses above shall be inclusive of cutting holes and chases and making good the same, CP brass screws, nuts, bolts and any other fixing arrangements required and recommended by manufacturers, testing and commissioning etc. complete.

## **3.8 SOIL, WASTE, VENT AND RAINWATER PIPES**

### **3.8.1 SCOPE OF WORK**

- a) Soil, waste, vent and rain water disposal scope shall include Supply, Installation, testing, commissioning and successful handing over to Owner as per the drawings, specifications and Schedule of Quantities.
- b) All soil, waste and storm water disposal for the portion above ground level to the public sewers shall be by gravity, whereas from the basement it shall be by pumping. Without restricting to the generality of the foregoing, the soil, waste, vent and rain water pipes system shall inter-alia include the following:
- c) Vertical and horizontal soil, waste, vent and rainwater pipes and fittings, joints, supports, paints and connections to fixtures.
- d) Connection of all pipes to sewer lines as shown on the drawings at ground level.
- e) Floor and urinal traps, clean out plugs, inlet fittings and rainwater (roof) outlets.
- f) Testing of all pipes and fittings in the workshop.
- g) Testing, commissioning and handing over of all pipes lines after installation.

### **3.8.2 GENERAL REQUIREMENTS**

- a) Pipes and fittings shall be fixed truly vertical, horizontal or in slopes as required in a neat workmanlike manner.

- b) Pipes shall be fixed in a manner so as to provide easy accessibility for repair and maintenance and shall not cause obstruction in shafts, passages etc.
- c) Pipes shall be securely fixed to walls and ceilings by suitable clamps at intervals specified. Only approved type of anchor fasteners shall be used for fixing pipes on RCC ceilings and RCC/ masonry walls.
- d) Access doors for fittings and clean outs shall be so located that they are easily accessible for repair and maintenance.
- e) Long bends shall be used on all main pipelines as far as possible. Use of elbows shall be restricted for short connections.
- f) Wherever piping is going across the separation/ expansion joints of buildings, piping shall be provided with flexible connectors on both sides of such joints or on single side depending on whether any wall is to be crossed or not.

### **3.8.3 UPVC PIPE WORK**

UPVC SWR(Soil Water and Rain water ) pipe work shall be provided for above ground soil, waste, vent and rain water pipe work as shown in drawings. UPVC SWR pipes and fittings shall confirm to IS: 13592 and IS: 14735 respectively. Pipes shall be of Type - B, pressure rating 6 kg/cm<sup>2</sup>. The pipes shall be supplied in nominal lengths of 2, 3, 4 or 6 metres, tolerance on specified lengths shall be +10 mm and -0 mm. Any physical test requirements shall be as per IS: 13592 - 1992.

### **3.8.4 Handling**

Because of their light weight, there may be a tendency for the UPVC pipes to be thrown often during installation. Reasonable care should be taken in handling and storage to prevent damage to the pipes. The pipes shall be stored as per manufacturer's recommendation. The Contractor shall be fully responsible in this case. In no case, pipes should be dragged on the ground. Pipes should be given adequate supports at all times.

### **3.8.5 Pipe Work Installation**

- a) UPVC pipes shall be laid under the flooring or hanging below slab or fixed on walls either buried or exposed as the case may be, as shown in the drawings. The minimum thickness of fittings shall be of 3.2 mm. the fittings shall be of injection mould type with solvent cement joint (for exposed piping) or rubber ring joint (for concealed piping). The pipes and fittings shall be capable of withstanding sun's rays. UPVC pipes laid below slab or suspended from ceiling shall be supported by GI angle brackets/ supports as detailed in the drawings.
- b) All vertical pipes shall be fixed by GI clamps truly horizontal. Branch pipes shall be connected to the stack at the same angle as that of the

fittings. No collars shall be used on vertical stacks. Each stack shall be terminated at top with a vent cowl (terminal guard).

- c) Horizontal pipes running along ceiling shall be fixed on structural members by adjustable clamps of special design shown on the drawings or as directed. Horizontal pipes shall be laid to uniform slope and the clamps adjusted to the proper levels so that the pipes fully rest on them.
- d) Contractor shall provide all sleeves, openings, hangers and anchor fasteners during the construction. Sleeves shall be one size higher than pipe or there should be at least 12 mm gap all around between pipes and sleeves. Wherever pipe passes through fire rated wall, the gap shall be filled with fire rated sealant as directed by Engineer. For non-fire rated wall, gap shall be filled with wool and silicon sealant (20 mm depth). Contractor shall provide all necessary information to the building work Contractor for making such provisions in the structure as necessary. All damages shall be made good by the Contractor at his own cost to restore the surface.
- e) Door type fittings shall be used in vertical piping installations. Door position of fittings shall be on top of fitting. Easy removal of access door should be possible. The access door shall be air and water tight. Single - yee shall be used for horizontal branch connection. Double - yee fittings shall be used in vertical piping branch connection only.

### **3.8.6 Jointing**

- a) UPVC pipes and fittings shall be joined as per the manufacturer's instructions/ recommendations. UPVC pipes and fittings shall be joined with Solvent Cement and jointing shall be carried out as follows:
- b) Cut the spigot end of the pipe square.
- c) All burrs from the internal and external surfaces should be removed.
- d) The spigot should be marked with a pencil line at a distance equivalent to the socket depth. Clean the surface within the marked area.
- e) Apply uniform coat of approved solvent cement on the external surface to the pipe and a lighter coat on the internal surface of the fitting.
- f) Insert the pipe end into the socket of the fitting and push it in upto the mark.
- g) The pipe work should be assembled in a manner such that it does not entail making of joints in restricted area.
- h) UPVC Pipe Work Testing
- i) UPVC pipes and fittings assembled shall be tested in accordance with IS 13592 - 1992. The openings of the pipes shall be sealed for the section to be tested. The water column of 2 m shall be maintained for a maximum of 15 minutes. Contractor with his team shall examine carefully all the joints for leakage.
- j) The Contractor shall test all vent pipes by a smoke testing machine. Smoke shall be pumped into the stack after plugging all inlets and connections and filling water in all trap seals. The test shall be conducted

under a pressure of 25 mm of water and shall be maintained for 15 minutes. The stack shall then be observed for leakages and all defective pipes and fittings removed or repaired as directed by the Engineer.

- k) A test register shall be maintained and all entries signed and dated by Contractor and Engineer. A proforma of the proposed test register shall be submitted to the Engineer for approval.
- l) All pipes in wall chase or meant to be encased or buried shall be hydro tested before the chase is plastered or the pipe encased or buried.
- m) All systems shall be tested in sections as required to expedite the work for other trades and meet construction schedules and final test on completion.

### **3.8.7 WASTE PIPE FROM APPLIANCES**

Waste pipe from appliances e.g. washbasins, baths, sinks and urinals, etc. shall be of UPVC confirming IS: 4985 as given in the Schedule of Quantities.

The internal diameter sizes of outlet branch waste pipes for different fittings shall be as follows:

|                    |                                                       |
|--------------------|-------------------------------------------------------|
| Wash Basin         | 40 dia.                                               |
| Urinals            | 50 dia.                                               |
| Sink               | 50 dia.                                               |
| Nahani Trap        | 75 dia., 50 mm seal.                                  |
| Multi Floor Trap   | 75 or 100 dia. as required, with 50 mm or 75 mm seal. |
| Wash troughs       | 50 dia.                                               |
| Canteen wash areas | 50 dia.                                               |

All pipes shall be fixed in gradient towards the outfalls of drains. Pipes inside a toilet room shall be in chase unless otherwise shown on drawings. Where required pipes may be run at ceiling level in suitable gradient and supported on structural clamps as directed by the Engineer. Spacing for the clamps shall be 3,000 mm for vertical runs and 2,400 mm for horizontal runs.

Pipes shall be UPVC tubes conforming to IS: 4985 and quality certificates shall be furnished. Pipes shall be provided with all required fittings conforming to IS: 4985 e.g. tees, couplings, bends, elbows, unions, reducers, nipples, plugs, etc. All UPVC waste pipes shall be terminated at the point of connection with the appliance with an outlet of suitable diameter. Pipes shall be painted as specified under Clause (c).

## **3.9 DRAINAGE ACCESSORIES**

### **3.9.1 Floor Trap/ Urinal Trap Grating**

Floor/ urinal traps grating shall be of stainless steel square/ round of size 125 mm x 125 mm square/ round as approved by Owner and shown in the drawing. Floor trap assembly shall be provided with round stainless steel strainer basket as a cockroach trap. Entire assembly shall be complete with ring, frame, outer cup, inner cup, grating, screws, etc. of an approved make.



### **3.9.2 Floor Cleanout**

Floor cleanout cover shall be of stainless steel square/ round of size 125 mm x 125 mm square/ round as approved by Owner and shown in the drawing. Floor cleanout assembly shall be complete with ring, outer frame, cover, screws, etc. of an approved make.

### **3.9.3 Ceiling Cleanout**

Ceiling cleanout cover shall be in nickle bronze/ PVC plug type/ GI flanged type of round shape matching pipe size as approved by Owner and shown in the drawing. Ceiling cleanout assembly shall be threaded with key hole for opening/ flanged type suitable for pipe. Threaded cover shall be used upto 100 mm size and above shall be GI flanged type with GI nuts and bolts. PVC cover shall be used for PVC drainage piping only, whereas nickle bronze and GI flanged type cover shall be used for HDPE/ CI/ CI LA pipe work.

### **3.9.4 RAINWATER PIPES**

All rainwater pipes shall be of UPVC/ HDPE as shown in drawing and specified in specification. UPVC piping shall conform to IS: 4985 and 6 kg/cm<sup>2</sup> minimum pressure rating or as specified in the Schedule of Quantities.

### **3.9.5 RAIN WATER OUTLET**

- a) Rain water outlet shall be preferably scupper type drain with cast iron body and cast aluminium grating with stainless steel screws. Suitable adapter/ connector shall be used to match the pipe. Wherever shafts are not available near rain water outlet, dome type rain water outlet shall be installed.
- b) Rain water outlet shall be tested for water leaking, prior to waterproofing treatment. Extreme care shall be taken, while sealing gap between rain water outlet and wall/ slab.

## **3.10 MEASUREMENT AND RATES**

### **3.10.1 General**

- a) Rates for all items shall be inclusive of all work and items called for in the specifications given above and the Schedule of Quantities as applicable for the work under floors, in shafts or at ceiling level at all heights and depths.
- b) All rates are inclusive of cutting holes and chases in RCC and masonry work and making good the same.
- c) All rates are inclusive of shop testing, pre-testing at site and final testing of the installations, materials and commissioning.

### **3.10.2 Pipes**

- a) The unit of measurement shall be linear metre to the nearest centimetre.
- b) All CI/ UPVC/ HDPE soil, waste, vent, anti-siphonage and rain water pipes shall be measured net, correct to a centimetre, including all fittings along their length after fixing. The length shall be taken along centre line of the pipes and fittings. No allowance shall be made for the portions of pipe lengths entering the sockets of the adjacent pipes or fittings. The above shall apply to all cases i.e. whether pipes are fixed on wall face or pillars or embedded in masonry or pipes running at ceiling level. The quoted rate shall include lead jointing.
- c) All CI/ UPVC/ HDPE pipes shall be measured in running metre correct to a centimetre for the finished work which shall include fittings e.g. bends, tees, elbows, reducers, crosses, sockets, nipples, nuts, unions, etc. The length shall be taken along centre line of the pipes and fittings. All pipes and fittings shall be classified according to their diameter, method of jointing and fixing substance, quality and finish. The diameters shall be nominal diameter of internal bore. In case of fittings of unequal bore, the largest bore shall be considered.

### **3.10.3 Pipe Encasing/ supports**

- a) Cement concrete around pipes shall be measured along the centre of the pipe line measured per linear metre and include any masonry supports, shuttering and centering, curing, cutting, etc. complete as described in the relevant specifications.
- b) GI Supports
- c) GI Supports rate for pipe work shall be included in the quoted BOQ/ SOQ rate and shall include GI channels/ angles (structural steel members), GI bolts, GI nuts, GI washers, brass screws, SS fasteners, GI threaded rod, GI clamps, GI hangers, primer coating, painting, etc. Length of supports embedded in the cement concrete blocks of 1:2:4 (1 cement : 2 coarse sand : 4 stone aggregate 20 mm nominal size) formed in the masonry walls shall not be paid extra. Also nothing shall be paid extra for the cement concrete block and making good the masonry wall, anchor fasteners, etc. complete.

### **3.10.4 Traps**

Unit of measurement shall be the number of pieces. All urinal traps, trap gratings, hoppers, clean out plugs shall be measured by number and shall include all items described in the relevant specifications and Schedule of Quantities. Cockroach traps shall not be measured separately and are deemed to be included in the rate for Traps.

### **3.10.5 Painting**

Painting of pipes shall be measured per running metre for each diameter of pipe and shall be inclusive of all fittings and clamps. No deduction shall be made for fittings.

#### **3.10.6 Excavation for Soil Pipes**

No extra payment shall be admissible for excavation, dewatering, back filling, consolidation and disposal of surplus earth for soil and waste pipes.

#### **3.10.7 Rain Water Outlet**

Rain water outlet shall be measured by numbers for different sizes.

Leaf and gravel grates along with the perforated ring shall be measured in kilograms.

### **3.11 WATER SUPPLY SYSTEM**

#### **3.11.1 SCOPE OF WORK**

- a) The scope shall include supply, installation, testing, commissioning and satisfactory handing over of the complete water supply system to Owner as per drawings, specifications and Schedule of Quantities. The water supply system shall include the following:
- b) Distribution system from main supply or overhead tank to all fixtures and appliances for cold and hot water.
- c) Insulation for hot water pipes.
- d) Pipe painting.
- e) Control valves, masonry chambers and other appurtenances.
- f) Connections to all plumbing fixtures, tanks, appliances.
- g) Inserts, nozzles for Reinforced Concrete tanks.
- h) The term water supply is used as indicative of all water supply work required and necessary for the building including such external work as may be necessary to make the system functional.

#### **3.11.2 GENERAL REQUIREMENTS**

If necessary and if approved by the Engineer, where unavoidable, bends may be formed by means of a hydraulic pipe bending machine for pipes up to 20 mm dia. No bending shall be done for pipes of 25 mm dia. and above. After bending zinc rich paint shall be applied wherever the zinc coating is damaged.

Valves and other appurtenances shall be so located as to provide easy accessibility for operations, maintenance and repairs. Valves shall be located at a height not exceeding 1.6 m above their operating floor/ platform level. Where such a provision is not possible and the valve is to be frequently operated a MS chain shall be provided for its operation.

### **3.11.3 GI PIPES, FITTINGS AND VALVES**

- a) All pipes inside the buildings and where specified, outside the building shall be MS galvanised steel tubes conforming to IS: 1239 of Class specified. When Class is not specified they shall be Heavy Class. All embedded/ concealed pipes shall be of heavy duty.
- b) Fittings shall be of malleable cast iron galvanised, of approved make. Each fitting shall have manufacturer's trade mark stamped on it. Fittings for GI pipes shall include couplings, bends, tees, reducers, nipples, unions, bushes, etc. Fittings, etc. shall conform to IS: 1879.
- c) Pipes and fittings shall be jointed with screwed joints using Teflon tape suitable for water pipes. Care shall be taken to remove burr from the end of the pipe after cutting by a round file. All pipes shall be fixed in accordance with layout and alignment shown on the drawings. Care shall be taken to avoid air pockets. Necessary vents and drains shall be provided at all high and low points respectively. GI pipes inside toilets shall be fixed in wall chases well above the floor. No pipes shall be run inside a sunken floor as far as possible. Pipes may be run under the ceiling or floors and other areas as shown on drawings. All pipe joints after testing of the line shall be seal welded and the weld plus the adjoining portion shall be given two coats of zinc rich primer.

### **3.11.4 Clamps**

GI pipes in shafts and other locations shall be supported by GI clamps of design approved by the Engineer. Pipes in wall chases shall be anchored by iron hooks. Pipes at ceiling level shall be supported on structural clamps fabricated from MS structural sections. Pipes in shafts shall be supported on slotted angles/ channels as specified/ as directed.

### **3.11.5 Unions**

Contractor shall provide adequate number of unions on all pipes to enable easy dismantling later when required. Unions shall be provided near each gunmetal valve, stop cock or check valve and on straight runs as necessary at appropriate locations as required for easy dismantling and/ or as directed by the Engineer.

### **3.11.6 Flanges**

Flanged connections shall be provided on pipes as required for maintenance/ ease in dismantling or where shown on the drawings, all equipment connections as necessary and required or as directed by the Engineer. Connections shall be made by the correct number and size of the GI nuts/ bolts as per relevant IS Standards and made with 3mm thick insertion rubber washer/ gasket. Where hot water or steam connections are made insertion gasket shall be of suitable high temperature grade and quality approved by the Engineer. Bolt hole dia. for flanges shall

conform to match the specification for CI sluice valve as per IS: 780. Gaskets shall conform to IS: 11149.

### **3.11.7 Trenches**

All GI pipes below ground shall be laid in trenches with a minimum cover of 600 mm. The width and depth of the trenches shall be as follows except at places where welding/ jointing, etc. needs larger width of trench. Additional width/ depth shall be provided as necessary for welding/ jointing, etc. at no additional cost:

| 3.11.8 Diameter of pipe (mm) | 3.11.9 Width of trench (mm) | 3.11.10 Depth of trench (mm) |
|------------------------------|-----------------------------|------------------------------|
| 3.11.11 15 to 50             | 3.11.12 300                 | 3.11.13 750mm                |
| 3.11.14 65 to 100            | 3.11.15 450                 | 3.11.16 1000mm               |

### **3.11.17 Sand Filling**

GI pipes in trenches shall be protected with fine sand 150mm all around before filling in the trenches.

### **3.11.18 Painting**

All pipes above ground shall be painted with one coat of red lead and two coats of synthetic enamel paint of approved shade and quality to give an even shade, or as specified by the Engineer.

### **3.11.19 Hot water pipes in chase:**

All hot water pipes fixed in wall chase shall be properly insulated by elastomeric tape as per manufacturer's recommendation.

### **3.11.20 Pipe Protection**

Where specified, pipes below floor or below ground shall be protected against corrosion by the application of two or more coats of solvent based rubberised asphaltic primer to give a uniform coat covered with two layers of 2 mm thick bituminous based anti-corrosive tape. The application of primer and anti-corrosive tape shall be done as specified by the manufacturer.

## **3.12 VALVES & FITTINGS**

### **3.12.1 Gunmetal Valves**

Valves 50 mm dia. and below shall be heavy gunmetal full way valves or globe valves conforming to Class I of IS: 778. Valves shall be tested at manufacturer's

works and the same stamped on it. All valves shall be approved by the Engineer-in-Charge before they are allowed to be used in the Work.

### **3.12.2 Sluice Valves**

Unless otherwise specified all valves 80 mm dia. and above shall be CI double flanged sluice valves with non rising spindle. Sluice valves shall be provided with wheel when they are in exposed positions and with a cap top when they are located underground. Contractor shall provide suitable operating keys for sluice valves with cap tops. Sluice valves shall be of approved makes conforming to IS: 780 of Class as specified

### **3.12.3 Butterfly Valves**

- a) Where specified, Valves 65mm dia. and above shall be cast iron butterfly valve to be used for isolation and/ or flow regulation as directed by the Engineer. The valves shall be tight shutoff/ regulatory type with resilient seat suitable for flow in either direction and seal in both directions.
- b) The butterfly valve shall be suitable for waterworks and rated Pressure requirement as mentioned in the Schedule of quantities.
- c) The body shall be of cast iron to IS:210 in circular shape and of high strength to take the water pressure. The disc shall be heavy duty cast iron with anti corrosive epoxy or nickel coating.
- d) The valve seat shall be of high grade elastomer or nitrile rubber. The valve in closed position shall have complete contact between the seat and the disc throughout the perimeter. The elastomer rubber shall have a long life and shall not give away on continuous applied water pressure. The shaft shall be EN 8 grade carbon steel.
- e) The valve shall be fitted between two flanges on either side of pipe flanges. The valve edge rubber shall be projected outside such that they are wedged within the pipe flanges to prevent leakages.
- f) Butterfly valve shall conform to IS: 13095.

### **3.12.4 Non Return Valve**

Where specified non return valve (swing check type) shall be provided through which flow can occur in one direction only. It shall be single door swing check type of best quality conforming to IS: 5312.

### **3.12.5 Forged Brass Ball Valve**

Valves of size 50 mm dia. and below shall be full bore quarter turn lever operated female threaded forged brass hard chrome plated ball valves conforming to IS: 554. Valve shall have PTFE body seat rings and gland packing, forged brass ball, stem and bonnet, carbon steel nut washer and lever and finished in chrome.

Valves shall have minimum working pressure of 16 bar. Valves shall be tested at manufacturer's works and the same stamped on it.

### **3.12.6 Ball Type Non Return Valve (NRV)**

Ball type NRV shall be used in water treatment plants and sewage sump pump piping. NRV shall be constructed in cast iron body with epoxy coating, phenolic resin and NBR (Nitrile) seal. NRV shall have flanged ends and can be installed in horizontal as well as vertical position. NRV shall have minimum working pressure of 10 bar or as per system requirements. Valves shall be tested at manufacturer's works and the same stamped on it.

### **3.12.7 Air Release Valve (ARV)**

Pressurised water supply lines shall be provided with air release valve at highest point to release accumulated air for piping system. Air release valve shall be automatic float operated, the diameter shall be as specified in the Schedule of Quantities. Air release valve shall be provided with ball valve for ease in Operation and Maintenance. Valve body shall be in cast iron stainless steel, brass and EPDM internal components. Valves shall have minimum working pressure of 10 Kgs.

## **3.13 TESTING**

3.13.1 All pipes, fittings and valves shall be tested in accordance with IS: 2065 except as may be modified herein under. All pipes, fittings and valves, after fixing at site, shall be tested to a hydrostatic pressure of 10 kg/cm<sup>2</sup> or 1.5 times the shut off head of the pump whichever is greater.

3.13.2 The test pressure shall be maintained for a period of at least thirty minutes without any drop in pressure.

3.13.3 A test register shall be maintained and all entries shall be signed and dated by Contractor(s) and the Engineer.

3.13.4 After commissioning of the Water Supply System, the Contractor shall test each valve by closing and opening it a number of times to observe if it is working efficiently and effectively. Valves which do not operate efficiently and effectively shall be replaced by new ones at no extra cost and the same shall be tested as above.

3.13.5 All pipes in wall chase or meant to be encased or buried shall be hydro tested before the chase is plastered or the pipe encased or buried.

### **3.13.6 INSULATION**

- a) All open hot water flow and return pipes shall be insulated with preformed fibrous pipe sections conforming to IS: 9842.
- b)

- c) Insulation to pipes shall be with pre-moulded pipe sections, thickness for sections shall be:
- d) Pipe 50 mm dia. and below - 25 mm thick.
- e) Pipe 65 mm dia. and above - 40 mm thick.

### **3.13.7 Application**

- a) All surfaces shall be thoroughly cleaned with a wire brush.
- b) One layer of approved primer shall be applied and premoulded pipe insulation sections shall be fixed.
- c) One layer of aluminium foil of thickness 0.711 mm (20 SWG), shall be applied as a finish layer.
- d) Insulation for hot water pipes in chase:
- e) All hot water pipes in chase shall be insulated with 3 mm elastomeric tape as per manufacturer's recommendations.

### **3.13.8 DISINFECTION OF INSTALLATION**

- a) The water supply installation shall be disinfected as per standards and as follows:
- b) Tanks and pipes shall be filled and flushed out.
- c) All bib cocks (taps) shall be closed.
- d) Tanks and pipes shall be re-filled while adding a sterilising admixture containing 50 parts chlorine to one million parts water.
- e) When the installation is filled all bib cocks (taps) shall be opened progressively and each allowed to run until the water smells of chlorine.
- f) The installation shall be topped up and more steriliser added.
- g) The installation shall then be left for three hours and shall then be tested for residual chlorine; if none is found, the installation shall be drained and the process repeated.
- h) The installation shall be finally drained and flushed with potable water before use.

### **3.13.9 MEASUREMENT AND RATES**

#### **3.13.9.1 GI and CPVC Pipes**

- a) GI pipes above ground shall be measured per linear metre (to the nearest cm) along the centre line of the pipe and shall be inclusive of all fittings e.g. couplings, tees, bends, elbows, unions, flanges, etc. Deduction for valves shall be made. Rates quoted shall be inclusive of all fittings, clamps, cutting holes chases and making good the same and all other items mentioned in the specifications and Schedule of Quantities.
- b) GI pipes below ground shall be measured per linear metre (to the nearest cm) along the centre line of the pipe and shall be inclusive of all fittings e.g. couplings, tees, bends, elbows, unions and flanges, etc. Deduction for valves shall be made. Rates quoted shall be inclusive of all fittings, cutting



holes and chases and making good the same and all other items mentioned in the specifications and Schedule of Quantities. Excavation, filling, back filling with selected excavated earth, compaction and disposal of surplus earth, fine sand filling around GI pipes, in external work shall be measured separately, as per respective items.

#### **3.13.10 VALVES, BIB COCKS AND STOP COCKS**

- a) Gunmetal and cast iron valves, Bib cocks and stop cocks shall be measured by numbers.
- b) Flanges for Nozzles
- c) Flanges for nozzles shall be measured by numbers and the quoted rate shall include welding of the flanges to the pipe nozzles.
- d) Painting/ Pipe Protection/ Insulation
- e) Unless otherwise specified painting/ pipe protection/ insulation for pipes shall be measured and paid for separately. These shall be measured per linear metre along the centre line of the pipe, over the finished surface and shall include all valves and fittings for which no deduction shall be made.

#### **3.13.11 Pressure Reducing Valve Set**

- a) Each pressure reducing valve set shall be complete with pressure reducing or pressure regulating valve, isolating valves, pressure gauges (fix with symphonic check) on inlet and outlet, pressure relief valve on outlet and filter on inlet.
- b) Each pressure reducing valve shall contain loading neoprene diaphragm and a full floating, self aligning, ignition resistant seat and shall be of the single stage, pressure reduction type with provision for manually adjusting the delivery pressure. The valve shall fail safe to the low pressure.
- c) Valves shall be capable of operating at the maintaining automatically the respective delivery pressure and flow rates as indicated and shall not be liable to creep. Valves shall also be capable of maintaining the pre-set down stream pressure under static condition.
- d) The filter on each inlet to a pressure reducing valve shall be of replaceable porous sintered metal type.

#### **3.13.12 Water Meters.**

- a) Water meter shall communicate with DDC or PLC through open communication protocol such as RS-485, MODBUS, BACnet etc. Plumbing Contractor shall co-ordinate with IBMS contractor for the connection purpose
- b) Water meters of approved make and design shall be supplied for installation at locations as shown.
- c) The water meters shall meet with the approval of local supply authorities. Suitable valves and chambers or wall meter box to house the meters shall also be provided along with the meters.

- d) The meters shall conform to Indian Standard IS:779 and IS:2373. Calibration certificate shall be obtained and submitted for each water meter.
- e) Provision shall also be made to lock the water meter. The provision shall be such that the lock is conveniently operated from the top. Where the provision is designed for use in conjunction with padlocks, the hole provided for padlocks shall be a diameter not less than 4mm.
- f) The G.I. lines shall be cut to the required lengths at the position where the meter and stop cock are required to be fixed. Suitable fittings shall be attached to the pipes. The meter and stop cock shall be fixed in a position by means of connecting pipes, jam nut and socket etc.
- g) The stop cock shall be fixed near the inlet of the water meter. The paper disc inserted in the ripples of the meter shall be removed. And the meter installed exactly horizontal or vertical in the flow line in the direction shown by the arrow cast on the body of the meter. 15.8 Care shall be taken that the factory seal of the meter is not disturbed. Wherever the meter shall be fixed to a newly fitted pipe line, the pipe line shall have to be completely washed before fitting the meter.

#### **3.13.13 Expansion Bellow**

- a) Rubber expansion joint with unit control (tie rod & gusset plate) shall be as per manufacturers specifications of standard length complete with all accessories tested to a pressure not less than 15 Kg./sqcm including rubber gaskets, flanges, nuts, bolts & washers complete as required.
- b) Pressure Gauge
- c) The pressure gauge shall be constructed of die cast aluminium and stove enamelled. It shall be weather proof with an IP 55 enclosure. It shall be a stainless steel Bourden tube type pressure gauge with a scale range from 0 to 16 Kg / cm square and shall be constructed as per IS:3524. Each pressure gauge shall have a siphon tube connection. The shut off arrangement shall be by Ball Valve. Calibration certificate shall be obtained and submitted for each pressure gauge

#### **3.13.14 DRAINAGE**

#### **3.13.15 SCOPE OF WORK**

- a) The scope shall include supply, installation, testing, commissioning and satisfactory handing over of the complete drainage system to client as per drawings, specifications and schedule of quantities.
- b) Without restricting to the generality of the foregoing, the drainage system shall inter-alia include:

- c) Sewer lines including earthwork for excavation, disposal, backfilling and compaction, pipelines, manholes, drop connections and connections to the municipal or existing sewer.
- d) Storm water drainage, earth works for excavation, disposal, backfilling and compaction, pipe lines, manholes, catch basins and connections to the existing municipal storm water drain or connected as indicated by the Engineer.

### **3.13.16 GENERAL REQUIREMENTS**

- a) Drainage lines and open drains shall be laid to the required gradients and profiles.
- b) All drainage work shall be done in accordance with the Local municipal bye-laws.
- c) Contractor shall obtain necessary approval and permission for the drainage system from the municipal or any other competent Authority.
- d) Location of all manholes, etc. shall be got confirmed by the Engineer-in-Charge before the actual execution of work at site. As far as possible, no drains or sewers shall be laid in the middle of road unless otherwise specifically shown on the drawings or directed by the Engineer-in-Charge in writing.

### **3.13.17 GULLY TRAPS**

Gully traps shall be of the same quality as described for stoneware pipes. Gully traps shall be fixed in a masonry chamber as per specifications. The CI sealed cover and frame shall weigh not less than 7.3 kg. Where necessary, sealed cover shall be replaced with CI grating of the same size. Rubber rings shall conform to IS: 5382. Gully traps shall be measured by the number and rate shall include all excavation, back filling, foundation, concrete brick masonry, cement plaster inside and outside, CI grating and sealed cover and frame, etc. complete.

## **3.14 PUMPS**

### **3.14.1 Inline Pumps**

- a) Pumps shall be suitable for single as well as parallel efficient operation at any point in between the maximum and minimum system resistances.
- b) Pumps shall run smooth without undue noise and vibration, cavitations, oil or water leaks over the range of operation. To ensure vibration free operation, all rotating components of pump shall be statically and dynamically balanced to BS 6861/ as per zones A & B of ISO 10816 -1
- c) The pump set shall be suitable for starting with discharge valve open and/or closed.
- d) The pump set shall be capable of withstanding the accidental rotation in reverse direction.
- e) Pumps shall be so selected that the design duty point is within 5% of the maximum efficiency point.

- f) The pump casing shall have ample space to take an impeller one size larger than that capable of performing the design duty.
- g) The pump shall have a speed of not more than 1500 rpm. The pump shall be lubricated in strict accordance with the manufacturer's instructions and shall be factory aligned prior to shipment.
- h) Facilities to select which pump to be duty pump and standby pump shall be provided and shall be interchangeable. Leakage from pump gland shall be drained to the nearest floor waste.

### 3.14.2 . Features of construction

- a) Pump shall be Vertical, centrifugal, with enclosed, radial impeller. Impeller shall be hydraulically balanced and keyed to shaft. The impeller shall have superior suction eye design to ensure the lower NPSH.
- b) Pump casing shall be of robust construction. Liquid passages shall be finished smooth and designed as to allow smooth flow. The volute tongue shall be filed to a smooth rounded edge.
- c) The vertical shaft shall be of high tensile stainless steel supported by bush bearings shall. The shaft shall be sealed with mechanical seal of DIN 24960 standard.
- d) The bearing shall be radial type bush bearing of tungsten carbide on shaft and ceramic bearing in the diffuser. The bearing shall be self lubricated and highly wear resistant. The motor bearing shall be capable of withstanding the axial thrust. Bearings shall be capable of taking the static weight of the rotating parts and any thrust generated by the operation of the pump. The bearing life shall be minimum 40,000 hrs of operation.
- e) The diffusers shall be made with pressed stainless steel and shall be designed to reduce the internal losses.
- f) Each pump shall be provided with an automatic coupling device for attaching the crane hook to the pump at low level, this automatic coupling device shall easily and automatically couple and uncouple the hoist hook and be complete with necessary accessories.

The materials of construction for Vertical in line pumps shall be as follows:

|                       |                                                             |
|-----------------------|-------------------------------------------------------------|
| 3.14.3 Capacity:      | 3.14.4 Refer GA drawing                                     |
| 3.14.5 Head           | 3.14.6 Refer GA drawing                                     |
| 3.14.7 Shut off head  | 3.14.8 110% of head                                         |
| 3.14.9 Efficiency     | 3.14.10 Bidder to furnish                                   |
| 3.14.11               | 3.14.12                                                     |
| 3.14.13 Component     | 3.14.14 Material                                            |
| 3.14.15 Impeller      | 3.14.16 AISI 304                                            |
| 3.14.17 Casing        | 3.14.18 Cast Iron to IS:210 Gr FG 200 with 1.5 to 2% Nickel |
| 3.14.19 Shaft         | 3.14.20 Stainless Steel : BS:970 Gr 316                     |
| 3.14.21 Fasteners and | 3.14.22 Stainless Steel AISI 316                            |

|                     |                   |
|---------------------|-------------------|
| Foundation Bolts    |                   |
| 3.14.23 Motor Stool | 3.14.24 Cast Iron |
| 3.14.25 'O' Rings   | 3.14.26 EPDM      |
| 3.14.27 Drain Plug  | 3.14.28 Brass     |

- g) Material test certificates from Government approved metallurgical laboratory shall be furnished by the Contractor
- h)
- i) Each pump shall be tested at the manufacturers premises for the full operating range of the pump to BS 5316 Part 1 .Pump performance shall be within the tolerance limits specified in the above said BS.
- j) Y-Strainers shall be provided as the suction side of the pump as shown in GA of UGT

### **3.14.29 Tests**

- a) Hydro test pressure on casing shall be 1.5 times maximum discharge head or twice differential head whichever is higher. (Maximum discharge head = shut-off head + maximum suction head). Unless otherwise stated in data sheet A, the hydrostatic tests on the casing shall be conducted for a minimum duration of 30 minutes.
- b) The pumps shall be tested as per IS 11346:2004, at rated speed at MANUFACTURER's works to measure capacity, total head, efficiency and power. These tests shall form the basis for acceptance of pumps except for vibration and noise. The pumps shall be tested over the range covering from shut-off head to the maximum flow. The duration of the test shall be minimum one (1) hour. Minimum five (5) readings approximately equidistant shall be taken for plotting the performance curves.
- c) After installation, the pumps shall be subjected to performance testing at site also. If the site performance is found not to meet the requirements regarding vibration and noise as specified, the equipment shall be rectified or replaced by the VENDOR, at no extra cost to the PURCHASER.

### **3.14.30 Inspection**

- a) The contractor shall provide facilities for inspection of the components of the pump during all stages of manufacture to check conformity to specification. The following inspection shall be invariably be witnessed by the Employer.
- b) Vertical inline pumps - Casing Hydro test, Performance Testing
- c) General purpose induction motor Performance and characteristics
- d) Motors shall be capable of giving rated output without reduction in the expected life span when operated continuously under either of the following supply conditions:

- e) Variation of supply voltage from rated motor voltage  $\pm 10\%$
- f) Variation in supply frequency from rated frequency  $\pm 5\%$
- g) Combined voltage and frequency variation  $\pm 10\%$
- h) Motors shall be capable of starting and accelerating the load with the applicable method of starting, without exceeding acceptable winding temperature, when the supply voltage is in the range of 85% of the rated voltage. Starting current of motor shall not exceed 200% of rated full load current.
- i) Motors shall be capable of satisfactory operation at full load at a supply voltage of 80% of the rated voltage for 5 minutes, commencing from hot condition.
- j) Motors shall be capable of developing the rated full load torque even when the supply voltage drops to 70% of the rated voltage. Such operation is envisaged for a period of 1 second. The pull out torque of the motor, to meet this requirement, shall be at least 205% of full load torque.
- k) The locked rotor current of the motors shall not exceed (inclusive of 20% tolerance) 600% of full load current for motors.
- l) Motors shall be capable of giving rated output without reduction in the expected life span when operated continuously under the specified supply conditions.
- m) The locked rotor withstand time under hot conditions at 110% rated voltage shall be more than the starting time at 80% voltage by at least two seconds or 15% of the accelerating time whichever is greater.
- n) Motors when started with the drive imposing its full starting torque under the supply voltage variations specified shall be capable of withstanding at least two successive starts from cold condition and one start from hot condition without injurious heating of windings. The motors shall also be suitable for four equally spread starts per hour under the above referred supply conditions.

#### **3.14.31 Insulation**

Any joints in the motor insulation such as at coil connections or between slot and winding sections, shall have strength equivalent to that of slot sections of the coil. The insulation shall be given tropical and fungicidal treatment for successful operation of the motor in hot, humid and tropical climate. The motors shall be provided with Class F insulation with temperature rise limited to that of Class B insulation

#### **3.14.32 Temperature rise**

The temperature rises shall not exceed the values given in IS 12802. Under extremes of supply condition, the temperature rise shall not exceed the value indicated in IS by 10°C.

#### **3.14.33 Constructional features**

The motor construction shall be suitable for easy disassembly and re-assembly. The enclosure shall be sturdy and shall permit easy removal of any part of the motor for inspection and repair. Motors weighing more than 25 kg shall be provided with eyebolts, lugs or other means to facilitate safe lifting. The rotor bars shall not be insulated in the slop portion between the iron core laminations for squirrel cage motors.

#### **3.14.34 Bearings**

Unless otherwise specified motor bearings shall not be subjected to any external thrust load. Unless otherwise specified, motor bearings shall have an estimated life of at least 40,000 hrs. The bearings shall permit running of the motor in either direction of rotation. It shall be possible to lubricate the bearings without dismantling any part of the motor.

#### **3.14.35 Terminal box**

- a) Terminal boxes shall be of weather proof construction designed for outdoor service, to eliminate entry of dust and water, gaskets of neoprene or approved equivalent shall be provided at cover joints and between box and motor frame. The cable terminal box shall be right hand side looking from coupling end.
- b) The terminal box shall be capable of being turned through 360 deg instead of 90 deg. The terminals shall be of the stud type with necessary plain washers, spring washers and check-nuts. Ample phase to phase and phase to ground clearances shall be kept. Suitable cable glands and cable lugs shall be supplied along with the motor. Separate terminal boxes shall be provided for stator leads and space heater.

#### **3.14.36 Paint and finish**

All motor parts exposed directly to atmosphere shall be finished and painted to produce a neat and durable surface which would prevent rusting and corrosion. The equipment shall be thoroughly degreased, all rust, sharp edges and scale removed and treated with one coat of primer and finished with two coats of grey enamel paint.

#### **3.14.37 Heating during idle periods**

Motors rated above 30 kW shall have space heaters suitable for 240V, single phase, 50 Hz, AC supply. Space heaters shall have adequate capacity to maintain motor internal temperature above dew point to prevent moisture condensation during idle period. The space heaters shall be placed in easily accessible positions in the lowest part of the motor frame.

#### **3.14.38 Accessories**

Motors shall have drain plugs so located that they will drain water, resulting from condensation or other cases from all pockets in the motor casing. The earthing pads shall be of non-corrodible metal welded or brazed at two locations on opposite sides.

#### **3.14.39 Tests**

- a) Motor shall be subjected to all the routine tests as per applicable standard in the presence of the PURCHASER'S representative. Copies of test certificates of type and routine tests shall be furnished as specified in the distribution schedule, for the PURCHASER'S approval. The VENDOR shall ensure to use calibrated test equipment/instruments having valid calibration test certificates from standard laboratories traceable to national/international standards
- b) If type tests have not been carried out on similar Motors, or if the type test reports submitted are not found in order, then VENDOR shall carry out these tests without any extra cost to the Purchaser.

This specification covers the general design, materials, construction features, manufacture, shop inspection and testing at manufacturer's works and delivery at site of Horizontal Centrifugal Pumps.

#### **3.14.40 CODES AND STANDARDS**

The design, materials, construction, manufacture, inspection, testing and performance of horizontal centrifugal pumps shall comply with all currently applicable statutes, regulations and safety codes in the locality where the equipment is to be installed. The equipment shall also conform to latest applicable Indian or equivalent standards. Other international standards are also acceptable, if these are established to be equal or superior to the listed standards. Nothing in this specification shall be construed to relieve the VENDOR of this responsibility.

#### **3.14.41 DESIGN REQUIREMENTS**

- a) Pumps of a particular category shall be identical and shall be suitable for parallel operation with equal load division. Components of identical pumps shall be inter-changeable.
- b) Flow rate versus head curve shall have stable and continuously rising characteristics towards the shut-off head. In case of unstable (drooping) characteristics the duty point shall be well away from the unstable region. Besides the actual flow rate versus head curve, curves for minimum and maximum impeller diameters shall also be shown.
- c) The shut-off head shall be at least 110% of the differential head.
- d) The required NPSH at duty point shall be at least one (1) metre less than the available NPSH.



- e) The rating of the pump driver shall be the larger of the following:
- f) The maximum power required by the pump from zero discharge to run-out discharge at site climatic conditions.
- g) 110% of the power required at the duty point at site climatic conditions.
- h) The corrosion allowance for pressure parts shall be 3 mm
- i) Pumps shall run smooth without undue noise and vibration. Noise level produced individually or collectively shall not exceed 85 dB (A) measured at a distance of 1.86 metres from the source in any direction. The overall vibration level shall be as per zones A and B of ISO 10816-1.

#### **3.14.42 CONSTRUCTION FEATURES**

- a) In addition to static balancing, impeller and balancing drum shall be balanced dynamically at or near the operating speed.
- b)
- c) Pump shall be provided with renewable type casing ring. Pump having capacity 1,000 M3/Hr and above shall be provided with impeller ring in addition to casing ring. The hardness of impeller ring shall be 50 BHN higher than that of casing ring.
- d) Pump casing shall be provided with drain and vent connection with plugged or valve connection.
- e) Bearing shall be oil-lubricated or grease-lubricated and shall have a life of 40,000 hours of working. In case of oil-lubricated bearing, constant oil leveller with magnetic drain plug shall be provided.
- f) Replaceable shaft sleeves shall be provided to protect the shaft where it passes through stuffing box.
- g) Stuffing box shall be of such design that it can be repacked without removing any part other than the gland and lantern ring.
- h) Mechanical seals shall be provided if called for in data sheet - A. If required, a flushing line shall be furnished, complete with strainer and orifice, from the pump discharge to the sealing face. When pumping liquid is not suitable for this purpose, a flushing connection shall be provided so that it can be connected to an external source.
- i) All pumps, except for back-pull out type, shall be provided with flexible coupling. Back-pull out type pumps shall be provided with spacer type coupling.
- j) Coupling guard made of expanded metal and bolted to the base plate shall be furnished for all coupled pumps.
- k)
- l) In addition to accessories listed in data sheet A, any other accessories required for safe and efficient operation of pump shall be provided.
- m) All incidental piping and valves required for sealing, lubrication and cooling for stuffing box packing and/or bearing of pump shall be furnished by the VENDOR.
- n)

- o) Leakage from the pump shall be led to the nearest surface drain by OTHERS. Pump vendor shall provide necessary arrangement like drip tray, base plate drain connection etc.

#### **3.14.43 TESTS AND INSPECTION**

- a) Hydro test pressure on casing shall be 1.5 times maximum discharge head or twice differential head whichever is higher. (Maximum discharge head = shut-off head + maximum suction head). Unless otherwise stated in data sheet A, the hydrostatic tests on the casing shall be conducted for a minimum duration of 30 minutes.
- b) The pumps shall be tested as per IS 5120, at rated speed at MANUFACTURER's works to measure capacity, total head, efficiency and power. The negative tolerance on efficiency shall be limited to 2.5% and not 5% as indicated in IS 5120. These tests shall form the basis for acceptance of pumps except for vibration and noise. The pumps shall be tested over the range covering from shut-off head to the maximum flow. The duration of the test shall be minimum one (1) hour. Minimum five (5) readings approximately equidistant shall be taken for plotting the performance curves.
- c) After installation, the pumps shall be subjected to testing at site also. If the site performance is found not to meet the requirements regarding vibration and noise as specified, the equipment shall be rectified or replaced by the VENDOR, at no extra cost to the PURCHASER.

#### **3.14.44 PERFORMANCE GUARANTEE**

Performance parameters to be guaranteed by the VENDOR and tolerances permitted shall be as indicated. BIDDER shall confirm acceptance of these by indicating values in data sheet B. Pump or any portion thereof is liable for rejection, if it fails to give any of the guaranteed performance parameters.

#### **3.15 SUBMERSIBLE PUMPS FOR WASTE TRANSFER**

- 3.15.1 Very importantly this pump range consists of many pump sizes – and each pump size is available with an optional number of stages to match any required duty point. Simply the duty point can be selected near to the best efficiency point (BEP) of the pump.
- 3.15.2 All the internal parts of SP submersible pumps are of SS fabricated steel ( SS 304 as standard and SS 316 and SS 904L optional). So smoother surface causing higher efficiencies and longer life of the rotating parts against hard water.
- 3.15.3 Smaller impeller diameter causing more specific speed and higher efficiency.

- 3.15.4 All the bearings are water lubricated and have squared shape from inside enabling the sand particles, if any, to leave the pump together with the pumped liquid.
- 3.15.5 Inlet Strainer – provides protection against failure during handling and prevents particles over a certain size from entering the pump.
- 3.15.6 All submersible pumps are fitted with a priming screw. Dry running is prevented as priming screw ensures that the pump bearings are always lubricated
- 3.15.7 These shall be fully submersible with a fully submersible motor. The pumps shall be provided with an automatic level controller and all interconnecting power and control cabling which shall cause the pumps to operate when the water level in the sump rises to a preset level and stop when the preset low level is reached. Stuffing box shall be provided with mechanical seals. Each pump shall be provided with a suitably rated induction motor suitable for 415 volts, 3 phase, 50 Hz A.C. power supply.
- 3.15.8 Each pump shall be provided with in built liquid level controller for operating the pump between predetermined levels. The pumping set shall be for stationary application and shall be provided with pump connector unit. The delivery pipe shall be joined to the pump through a rubber diaphragm, and bend and guide pipe for easy installation. Pump shall be provided with all accessories and devices necessary and required for the pump to make it a complete working system.
- 3.15.9 Sump pump shall be complete with level controllers, power and control switch gear, Auto/off/Manual switches, pumps priority selections and control and power cabling upto motor and controller/probes etc. (Including earthing). Level control shall be such that one pump starts on required level, 2nd pump cuts in at high level and alarms is given at extra high level. All level controllers shall be provided with remote level indications.

### 3.16 **Motor Design**

- 3.16.1 The pump motor shall be a squirrel cage induction, housed in air filled water-tight enclosure. Oil filled motors are not acceptable. The stator windings shall be Class "F" insulation (155 degree C or 311 degree F) for general usage and class 'H' insulation (180 degree C or 317-8 grade 2) for submersible type.
- 3.16.2 The stator shall be heat shrunk fitted into the enclosure and shall not use bolts, pins or other fasteners that penetrate through the stator enclosure. The starter shall be equipped with a thermal switch embedded in series in the coils of the stator windings to protect the stator from wheel.

3.16.3 The motors shall be designed for continuous running duty type at 415 volts, 3 phase, 50 Hz power supply and capable of sustaining a minimum of 20 starts/stops per hour.

3.16.4 Between stator housing and pump, a tandem seal arrangement will be provided with an oil barrier. Both seals run in oil, allowing dry running without seal damage. Both seals shall be of the rubber bellows or metallic bellow type with positive drive between shaft and rotating seal face

### **3.17 PLUMBING SYSTEM-ELECTRICAL REQUIREMENTS**

#### **3.17.1 SCOPE OF WORK**

- a) Power and Control cabling from MCC to Plumbing pumps panel including cable carrier system.
- b) Local Push button station
- c) Earthing system above ground
- d) Structural steel for supporting the panels, LPBS, Cable trays etc.

#### **3.17.2 ELECTRICAL PANELS**

- a) The Contractor's scope includes 1 No. MCC for Plumbing System.
- b) 415 Volts, 50 Hz, TPN supply at the incomer of MCC will be made available by the purchaser. Further distribution of power and derivation of any other voltage shall be in Contractor's scope.
- c) MCC incomer shall be suitable for termination of 1RX3.5CX120 sqmm, AL, XLPE The Contractor's scope includes 1 No. MCC for Plumbing System.
- d) All potential free contacts (Feedback & command from PLC) shall be wired upto Marshalling compartment of MCC.

#### **3.17.3 LOCAL PUSH BUTTON STATIONS (LPBS)**

- a) LPBS for motors shall be provided by contractor. Necessary supporting structural steel for the same is in Contractor's scope.
- b) LPBS shall be metal enclosed, weather proof, dust and vermin-proof, suitable for mounting on wall or structures. The enclosure shall be sheet steel, 2 mm thickness and shall have degree of protection not less than IP55. The enclosure shall be painted with one coat of epoxy primer and two coats of Epoxy Light Gray paint – 631 shade as per IS-5.
- c) LPBS for shall be provided with 1no. recessed type start push button and 1No. Palm push, mushroom head type stop push button.
- d) All push buttons shall be fitted with two (2) NO and two (2) NC contacts, rated for 10 A at 240V AC.
- e) LPBS shall be suitable for bottom cable entry with stopping plugs.

- f) Internal wiring shall be done with copper conductor HFFR wires shall be neatly done.
- g) All spare contacts shall be wired upto terminal block.
- h) Distance between cable gland plate and terminal block shall be minimum 75mm for ease of termination.
- i) Two (2) Nos. earthing terminals shall be provided for external earthing. Earthing continuity bonds shall be provided

#### **3.17.4 CABLING SYSTEM**

- a) For MCC, Power supply will be made available at incomer with the help of 1.1 kV, XLPE Power Cables by others. Further Power and control cabling from MCC to motors shall be in the in scope of Contractor. Incoming Cable sizes will be indicated to successful bidder during execution based on total load of each plant.
- b) FPS MCC shall be installed in Pump House.
- c) MCC shall be provided with Top Cable entry. Anchor Fasteners, Bolts and other necessary supporting structure required for Panel installation shall be provided by bidder.
- d) Contractor shall furnish Cabling layout & Cable Schedule for each Area.
- e) For overhead cable trays, foundation (if required) for cable tray supporting structure will also be provided by Bidder.
- f) LV Power Cables shall be 1.1 kV grade stranded copper conductor (up to 6 sq. mm) and stranded aluminium conductor (above 6 sq. mm) multi core, XLPE insulated, extruded PVC inner sheathed, GI wire / strip armoured, and extruded FRLS PVC outer sheathed, as per IS:7098 (Part-1).
- g) Control Cables shall be 1.1 kV grade stranded copper conductor (of minimum 2.5sq.mm.), XLPE insulated, extruded PVC inner sheathed, GI wire / strip armoured, extruded FRLS PVC outer sheathed as per IS:7098 (Part-1).
- h) Minimum 1 core shall be kept spare in control cable.
- i) Cable trays shall be Hot dipped Galvanised Iron (85 micron galvanising) with accessories such as coupling plates (with minimum 8 nos. holes), bends, tees, reducers, coupling nut-bolts etc. of following width. All the hardwares used for cable tray jointing, cable supporting & clamping shall be of SS304 material.
- j) Nylon ties shall not be used for clamping cables, GI strip with SS304 hardware shall be used.
- k) While sizing of Cables, Bidder shall consider voltage drop of 1.0% (max.) from MCC to Motor.
- l) Cable sizes indicated in data sheets of low voltage induction motor are for General Guidelines only. Contractor shall provide cable sizing calculation based on design criteria mentioned above.

#### **3.17.5 EARTHING SYSTEM**

- a) Earthing below ground shall be by others. Earthing above ground i.e. equipment earthing upto earthing bus shall be in the scope of Bidder.
- b) Earthing shall be of GI.
- c) Earthing connection at equipment shall be of bolted type.
- d) 1 Run of 50x10mm GI Strip shall be provided by contractor along Cable Tray and shall be connected at suitable point to Earth Grid.
- e) Bidder shall furnish the Earthing layout along with calculations (below as well as above ground).
- f) LV MOTORS
- g) Motors shall be suitable for 415 V, 3 phase, 50 Hz supply, squirrel cage type.
- h) Motors shall be squirrel cage type, energy efficient (IE-3 class as per IS-12615, 2011) squirrel cage induction motors having TEFC, IP-55 enclosure (including terminal boxes and bearing housing) with Class-F insulation (and temperature rise limited to Class B) conforming to IS 325.
- i) Motors shall be energy efficient (IE-3) type.
- j) Motors will be with Direct On Line starter (DOL).
- k) Bidder shall follow below mentioned values of Efficiency as per ECBC.

| Motor Size (kW) | Efficiency (%) |        |
|-----------------|----------------|--------|
|                 | 2 Pole         | 4 Pole |
| 1.1 (1.5 hp)    | 82.2           | 83.8   |
| 1.5 (2 hp)      | 84.1           | 85     |
| 2.2 (3 hp)      | 85.6           | 86.4   |
| 3.0 (4 hp)      | 86.7           | 87.4   |
| 4.0 (5.5 hp)    | 87.6           | 88.3   |
| 5.5 (7.5 hp)    | 88.5           | 89.2   |
| 7.5 (10 hp)     | 89.5           | 90.1   |
| 11.0 (15 hp)    | 90.6           | 91     |
| 15.0 (20 hp)    | 91.3           | 91.8   |
| 18.5 (25 hp)    | 91.8           | 92.2   |
| 22.0 (30 hp)    | 92.2           | 92.6   |
| 30.0 (40 hp)    | 92.9           | 93.2   |
| 37.0 (50 hp)    | 93.3           | 93.6   |
| 45.0 (60 hp)    | 93.7           | 93.9   |
| 55.0 (75 hp)    | 94             | 94.2   |
| 75.0 (100 hp)   | 94.6           | 94.7   |

### 3.17.6 TERMINAL POINTS (BATTERY LIMIT)

- a) 415 Volts, 50 Hz, TPN supply at the incomer of MCC shall be made available by the purchaser. Further distribution of power and derivation of any other voltage shall be in Contractor's scope.
- b) Termination of incomer and outgoing cables is in scope of contractor.
- c) Earthing above ground shall be considered in contractor's scope as per clause no.2.5

### **3.17.7 PREFERRED MAKE**

- a) L V Switchgear – L&T
- b) L V Switchgear – L&T/ Schneider/ ABB
- c) Distribution Boards – L&T/ Legrand/ ABB
- d) Moulded Case Circuit Breaker - L&T/ Schneider/ ABB
- e) Motor Protection Circuit Breaker – L&T/ Schneider/ ABB
- f) Contactors – L&T/ Legrand/ Schneider
- g) Current Transformer - Kappa/ Silkans / Pragati / Indcoil / Precise
- h) Ammeter and Voltmeter - AE/Rishabh / Conzerve
- i) Push buttons - Siemens/Teknic/Vaishno/BCH
- j) LED Indicating lamps - Teknic / Mathura / Siemens / Binay
- k) MCB – L&T/ Schneider/ ABB
- l) Control fuses – SIEMENS / GE
- m) Terminal Block – Connectwell / Elmex / Wago
- n) Switch-socket – Anchor / Reputed
- o) Space Heater – Girish / reputed
- p) L T Motor –Siemens
- q) L T Cable – KEI/ CCI/ Finolex
- r) HFFR wires (including panel wiring) – Finolex/ LAPP/ RR KABEL
- s) Local Push button station (LPBS) – L&T/ Teknic/ Schneider/ Mathura
- t) Cable Trays – Indiana/ Patny/ Profab/ OBO

3.17.8 Any other make subjected to prior approval of purchaser / Consultant

## **3.18 COMMISSIONING & GUARANTEE**

### **3.18.1 SCOPE OF WORK**

- a) Work under this section shall be executed without any additional cost. The rates quoted in this tender shall be inclusive of the works given in this section.
- b) Contractor shall provide all tools, equipment, metering and testing devices required for the purpose.
- c) On award of work, Contractor shall submit a detailed proposal giving methods of testing and gauging the performance of the equipment to be supplied and installed under this contract.
- d) All tests shall be made in the presence of the Architect or his representative or any inspecting authority. At least five working days

notice in writing shall be given to the inspecting parties before performing any test.

- e) Water flow rates of all equipment and in pipe lines through valves shall be adjusted to design conditions. Complete results of adjustments shall be recorded and submitted.
- f) Contractor shall ensure proper balancing of the hydraulic system and for the pipes / valves installed in his scope of work by regulating the flow rates in the pipe line by valve operation. The contractor shall also provide permanent Tee connection (with plug) in water supply lines for ease of installing pressure gauge, temperature gauge & rota meters. Contractor shall also supply all required pressure gauge, temperature gauge for system commissioning and balancing. The balancing shall be to the satisfaction of Consultant / Project Manager.

### **3.18.2 PRECOMMISSIONING**

- a) On completion of the installation of all pumps, piping, valves, pipe connections, insulation etc. the Contractor shall proceed as follows:
- b) Prior to start-up and hydraulic testing, the Contractor shall clean the entire installation including all fitments and pipe work and the like after installation and keep them in a new condition. All pumping systems shall be flushed and drained at least once through to get rid of contaminating materials. All pipes shall be rodded to ensure clearance of debris, cleaning and flushing shall be carried out in sections as the installation becomes completed.
- c) All strainers shall be inspected and cleaned out or replaced.
- d) When the entire systems are reasonably clean, a pre-treatment chemical shall be introduced and circulated for at least 8 hours. Warning signs shall be provided at all outlets during pre-treatment. The pre-treatment chemical shall:
  - e) Remove oil, grease and foreign residue from the pipe work and fittings;
  - f) Pre-condition the metal surfaces to resist reaction with water or air.
  - g) Establish an initial protective film;
  - h) After pre-treatment, the system shall be drained and refilled with fresh water and left until the system is put into operation.
- i) Details and procedures of the pre-treatment shall be submitted to the Architect for approval.
- j) Check all clamps, supports and hangers provided for the pipes.
- k) Check all the equipment, piping and valves coming under hot water system and operate each and every valve on the system to see if the valves are functioning properly. Thereafter conduct & hydro test of the system as for (b) above.
- l) Fill up pipes with water and apply hydrostatic pressure to the system as given in the relevant section of the specification. If any leakage is found, rectify the same and retest the pipes.



### **3.18.3 STATUTORY AUTHORITIES' TESTS AND INSPECTIONS**

- a) As and when notified in writing or instructed by the Architect, the Contractor shall submit shop drawing and attend all tests and inspections carried out by Local Fire Authorities, Water Authority and other Statutory Authorities, and shall forthwith execute free of charge any rectification work ordered by the Architect as a result of such tests and inspections where these indicate non-compliance with Statutory Regulations. Some of these tests may take place after the issue of Practical Completion of the Main Contract and the Contractor shall make all allowances in this respect.
- b) The Contractor shall be responsible for the submission of all necessary forms and shop drawings to the Statutory Authorities which shall conform in layout to the latest architectural plans submitted to and kept by these Authorities.
- c) The submission shall comply with the requirements set forth in the current Codes of Practice and circular letters of the Statutory Authorities. The shop drawings to be submitted shall be forwarded to the Architect for checking before submission.
- d) The Contractor shall allow for at least two submissions of complete sets of shop drawings to the Authorities, one to be made within six months after the award of the Contract but not less than six weeks before the inspection. The Architect may at his discretion instruct the Contractor for additional submissions to the Local Authorities whenever necessary.
- e) The Contractor shall notify the Architect at least seven days in advance of his application for local Authority tests and inspections. On receipt of a confirmed date for test and inspection the Contractor shall inform the Architect without delay.

### **3.18.4 FINAL ACCEPTANCE TESTS**

- a) Following commissioning and inspection of the entire installation, and prior to issue of the Completion Certificate, the Contractor shall carry out final acceptance tests in accordance with a programme to be agreed with the Architect.
- b) Should the results of the acceptance tests show that plant, systems and/or equipment fail to perform to the efficiencies or other performance figures as given in this Specification, the Contractor shall adjust, modify and if necessary replace the equipment without further payment in order that the required performance is obtained.
- c) Where acceptance tests are required by the relevant Authorities having jurisdiction, these tests shall be carried out by the Contractor prior to the issue of Completion Certificate to the acceptance of the Authorities.

### **3.18.5 REJECTION OF INSTALLATION / PLANT**

- a) Any item of plant or system or component which fails to comply with the requirements of this Specification in any respect whatsoever at any stage of manufacture, test, erection or on completion at site may be rejected by the Architect either in whole or in part as he considers necessary/appropriate. Adjustment and/or modification work as required by the Architect so as to comply with the Authority's requirements and the intent of the Specification shall be carried out by the Contractor at his own expense and to the satisfaction of the Authority/Architect.
- b) After works have been accepted, the Contractor may be required to carry out assist in carrying out additional performance tests as reasonably required by the Architect/Employer.

### **3.18.6 WARRANTY AND HANDOVER**

The Contractor shall warrant that all plant, materials and equipment supplied and all workmanship performed by him to be free from defects of whatsoever nature before handover to the Owner.

### **3.18.7 HANDING OVER OF DOCUMENTS**

All testing and commissioning shall be done by the Contractor to the entire satisfaction of the Owner's site representative and all testing and commissioning documents shall be handed over to the Owner's site representative. The Contractor shall also hand over all maintenance and operation manuals, all certificates and all other documentation as per the terms of the contract to the Owner's site representative.

### **3.18.8 CHECKLIST FOR COMMISSIONING.**

#### **3.18.9 Water Supply& Drainage Equipment**

- a) Operate each and every valve on the system to see if the valves are functioning properly.
- b) Check all clamps, support and hangers provided for the pipes.
- c) Check rotation of each motor and correct the same if required.
- d) All the pumps shall run continuously for one hour. Record the pressure and motor current and voltage readings.
- e) Check all annunciations by simulating the alarm conditions if any at site.
- f) Remove grease trap manhole covers. Check for cleanliness, check for partitions, and put back the cover.
- g) Remove manhole covers on sewer lines, inspect for cleanliness. After they are found to be clean, pour water into the first manhole and see that all the lines are clear. Make sure that all the covers are put back after the inspection.
- h) Check gully traps by opening of covers and check that water seal in the traps are maintained. Check for general cleanliness.

- i) Check installation of proper vents and cowls at the roof level for all soil and waste pipes.
- j) Performance test to be carried out and recorded in the following table for the pumps.

| Sr.No. | Pump Tag No.              | Model No. | Design Flow LPS | Actual Flow LPS | $\Delta P$ kg/cm <sup>2</sup> | Full load Amps | Remarks |
|--------|---------------------------|-----------|-----------------|-----------------|-------------------------------|----------------|---------|
| 1)     | Domestic Water Pump No. 1 |           |                 |                 |                               |                |         |
| 2)     | Domestic Water Pump No. 2 |           |                 |                 |                               |                |         |
| 3)     | Flushing Water Pump No. 1 |           |                 |                 |                               |                |         |
| 4)     | Flushing Water Pump No. 2 |           |                 |                 |                               |                |         |

- k) (Similar Readings shall be taken for all other pumps)
- l) Simulate low level in the domestic water tanks to trip domestic Filter Feed Pumps. Simulate high level in treated water tanks to trip softener feed pumps. Simulate low level in treated water tanks to trip treated water hydro-pneumatic pumps.
- m) Submersible Sump Pumps
- n) Fill the sump with water, while observing the level.
- o) Keep the pump starter switch on 'OFF' position to check for start of pump.
- p) By keeping the starter switch on 'Auto' position, both the pumps should start. As the water level starts receding, one pump should switch off by itself. The second pump should switch off on further reduction in water level.
- q) Fill the sump with a little water and check both the pumps in 'Manual' position momentarily.
- r) Leave the switches in 'Auto' position for both the pumps.

### 3.19 DATA SHEETS

#### 3.19.1 BUTTERFLY VALVES

| SL. NO. | DATA SHEET A<br>BUTTERFLY VALVES<br>ITEM          | UNIT                       | Blank Spaces to be filled by vendor |      |      |
|---------|---------------------------------------------------|----------------------------|-------------------------------------|------|------|
| 1.0     | GENERAL                                           |                            |                                     |      |      |
| 1.1.    | SERVICE                                           |                            |                                     |      |      |
| 1.2.    | TAG NOs.                                          |                            |                                     |      |      |
| 1.3.    | NO. OF VALVES                                     | No.                        | As per BOQ                          |      |      |
| 1.4.    | DESIGN STANDARD                                   |                            |                                     |      |      |
| 1.5.    | VALVE CATEGORY                                    |                            |                                     |      |      |
| 1.6.    | DISC                                              |                            |                                     |      |      |
| 1.7.    | BODY TYPE                                         |                            | Cast Iron                           |      |      |
| 1.8.    | VALVE SIZE                                        | NB                         | 50 mm to 150 mm                     |      |      |
| 1.9.    | VALVE RATING / CLASS                              |                            | PN 10                               |      |      |
| 1.10.   | FLUID HANDLED WITH ITS SPEC. GRAVITY              |                            |                                     |      |      |
| 1.11.   | COMPANION FLANGE TYPE AND CLASS                   |                            | ANSI B16.5 Class 150                |      |      |
| 1.12.   | TYPE OF VALVE OPERATOR                            |                            | •                                   |      |      |
| 1.13.   | MAXIMUM FLOW (INDICATE THE RELATED PRESSURE ALSO) | M <sup>3</sup> /hr,<br>KPa | MAX.                                | MIN. | OPER |
| 1.14.   | MAXIMUM FLOW VELOCITY                             | m/s                        |                                     |      |      |
| 1.15.   | DESIGN PRESSURE                                   | KPa                        |                                     |      |      |
| 1.16.   | OPERATING PRESSURE                                | KPa                        |                                     |      |      |
| 1.17.   | DESIGN TEMPERATURE                                | °C                         |                                     |      |      |
| 1.18.   | OPERATING TEMPERATURE                             | °C                         |                                     |      |      |
| 1.19.   | VALVE LOCATION                                    |                            |                                     |      |      |
|         |                                                   |                            |                                     |      |      |
| 4.0     | MATERIALS OF CONSTRUCTION                         |                            |                                     |      |      |
| 4.1     | • BODY                                            |                            | CAST IRON                           |      |      |
| 3.2.    | • DISC                                            |                            | CAST IRON                           |      |      |

| SL. NO. | DATA SHEET A<br>BUTTERFLY VALVES<br>ITEM                          | UNIT               | Blank Spaces to be filled by vendor |
|---------|-------------------------------------------------------------------|--------------------|-------------------------------------|
| 3.3.    | STEM                                                              |                    | STAINLESS STEEL                     |
| 3.4.    | SEAT                                                              |                    | EPDM                                |
| 3.5.    | BODY SEAT RINGS                                                   |                    |                                     |
| 3.6.    | DISC SEAL RINGS                                                   |                    |                                     |
| 3.7.    | SEAT RETAINING RINGS                                              |                    |                                     |
| 3.8.    | COMPANION FLANGE                                                  |                    |                                     |
| 5.0     | <b>TESTS AND INSPECTION</b>                                       |                    |                                     |
| 4.1.    | HYDROSTATIC TEST PRESSURE FOR BODY                                | Kg/cm <sup>2</sup> | 15 BAR                              |
| 4.2.    | HYDROSTATIC TEST PRESSURE FOR DISC                                | Kg/cm <sup>2</sup> | 15 BAR                              |
| 4.3.    | DISC STRENGTH TEST PRESSURE                                       | Kg/cm <sup>2</sup> |                                     |
| 4.4.    | ACTUATOR PERFORMANCE TEST<br>PRESSURE                             | Kg/cm <sup>2</sup> |                                     |
| 4.5.    | AIR LEAK TEST PRESSURE                                            | Kg/cm <sup>2</sup> |                                     |
| 4.6.    | ELECTRICAL CONTINUITY TEST                                        |                    |                                     |
| 4.7.    | <b>SPARES</b>                                                     |                    |                                     |
| 6.0     | DISC SEAL RINGS                                                   |                    |                                     |
| 5.1.    | FLANGE GASKET                                                     |                    |                                     |
| 5.2.    | SEAT/SEAL CLAMPING BOLTS                                          |                    |                                     |
| 5.3.    | 'O' RING SEALS OR GLAND PACKING                                   |                    |                                     |
| 5.4.    | <ul style="list-style-type: none"> <li>(REF. NOTE -10)</li> </ul> |                    |                                     |

**NOTES :-**

- FOR GENERAL REQUIREMENTS. HOWEVER, IN CASE OF OVERLAPPING REQUIREMENTS, THOSE OF THE DATA SHEET A, TO BE CONSIDERED AS THE FINAL ONE.
- THE VALVE SHALL BE DESIGNED CONSIDERING THE LARGER OF THE FOLLOWING TORQUE REQUIREMENTS FOR WHICH CALCULATIONS SHALL BE SUBMITTED:
  - CALCULATED AS PER AWWA-C504-80
  - CALCULATED AS PER THE STANDARD TO WHICH VALVE IS DESIGNED.
- FOR MANUALLY OPERATED VALVES, TORQUE REQUIRED AT HAND WHEEL SHALL NOT EXCEED 7 KG.M.
- MOTOR OPERATED VALVE ACTUATOR SHALL BE RATED TO PROVIDE AN OUTPUT TORQUE OF ATLEAST 150% OF TORQUE REQUIRED AS PER NOTE-2 ABOVE UNLESS OTHERWISE NOTED.
- THE ACTUATOR SHALL BE CAPABLE OF OPERATING IN ANY MOUNTING ANGLE.
- THE TRANSMISSION UNIT SHALL BE DESIGNED TO TRANSMIT TWICE THE VALVE DESIGN TORQUE UNLESS OTHERWISE NOTED.
- THE ACTUATOR SHALL PROVIDE AN UNSEATING TORQUE OF AT LEAST 50% IN EXCESS OF VALVE SEATING TORQUE AT THE SPECIFIED VOLTAGE UNLESS OTHERWISE NOTED.
- SEGMENTAL WELDED CARBON STEEL FLANGE PLATES ABOVE 20 MM THICKNESS SHALL BE SUBJECTED TO PREHEATING BEFORE WELDING AND STRESS RELIEVING AFTER WELDING AS PER IS 2825 UNLESS OTHERWISE SPECIFIED.
- UNLESS OTHERWISE SPECIFIED IN BOQ , ONE COAT OF ZINC RICH PRIMER AND TWO COATS OF ENAMEL

|     |                                                                                                                                            |
|-----|--------------------------------------------------------------------------------------------------------------------------------------------|
|     | SHALL BE APPLIED TO ALL STEEL AND CAST IRON EXPOSED SURFACES. THE MINIMUM THICKNESS OF COATING SHALL BE 100 MICRONS.                       |
| 10. | THE VENDOR MAY ALSO SUGGEST ANY ADDITIONAL SPARES AND TOOLS REQUIRED FOR THE SUCCESSFUL OPERATION, START UP AND MAINTAINENCE OF THE VALVE. |
| 11. | IN THE ABSENCE OF ANY TEST RELATED DATA, THE RELEVANT TESTING STANDARD FOR BUTTERFLY VALVES MAY BE INDICATED.                              |

### 3.19.2 Y STRAINER

|             |                       | DATA SHEET A<br>STRAINERS (Y TYPE)                          |                            |
|-------------|-----------------------|-------------------------------------------------------------|----------------------------|
| DESIGN DATA | 1.                    | TAG NO.                                                     |                            |
|             | 2.                    | QUANTITY REQUIRED                                           | As per BOQ                 |
|             | 3.                    | LOCATION                                                    |                            |
|             | 4.                    | TYPE                                                        | Y STRAINER                 |
|             | 5.                    | FLUID                                                       | DOMESTIC AND TREATED WATER |
|             | 6.                    | FLOW RATE<br>m <sup>3</sup> /hr                             |                            |
|             | 7.                    | OPERATING PRESSURE                                          |                            |
|             | 8.                    | OPERATING TEMPERATURE °C                                    | Ambient                    |
|             | 9.                    | DESIGN PRESSURE<br>barg                                     |                            |
|             | 10.                   | DESIGN TEMPERATURE<br>°C                                    |                            |
|             | 11.                   | FLUID VISCOSITY (Cp) AT<br>OP. TEMP.                        |                            |
|             | 12.                   | FLUID SP. GRAVITY AT OP.<br>TEMP.                           |                            |
|             | 13.                   | MAX. PERMISSIBLE PR. DROP<br>UNDER 50% CLOGGED<br>CONDITION |                            |
|             | 14.                   | SCREEN BASKET DATA                                          |                            |
|             |                       | 1. DIA OF PERFORATIONS, mm                                  | 3 MM                       |
|             |                       | 2. MIN. THICKNESS, mm                                       |                            |
|             |                       | 3. FREE STRAINING AREA                                      |                            |
|             | 15.                   | STEAM JACKET                                                |                            |
|             |                       | 1. INLET PR. barg, OP. / DESN.                              |                            |
|             |                       | 2. INLET TEMP. °C, OP./DESN.                                |                            |
| 16.         | END CONNECTIONS       |                                                             |                            |
|             | 1. SIZE, NB mm        |                                                             |                            |
|             | 2. TYPE               |                                                             |                            |
|             | 3. DETAILS/ STANDARDS |                                                             |                            |
| 17.         | COVER                 |                                                             |                            |
| 18.         | IBR APPROVAL          |                                                             |                            |
|             | 19.                   | BODY                                                        | CAST IRON                  |
|             | 20.                   | COVER                                                       | CAST IRON                  |

|                                                                                                                                                                             |                                 |                 |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|-----------------|
| 21.                                                                                                                                                                         | SCREEN BASKET                   | STAINLESS STEEL |
| 22.                                                                                                                                                                         | BOLTS/ STUDS                    |                 |
| 23.                                                                                                                                                                         | NUTS                            | CARBON STEEL    |
| 24.                                                                                                                                                                         | GASKETS                         | Rubber          |
| 25.                                                                                                                                                                         | JACKET                          |                 |
| 26.                                                                                                                                                                         | JACKET COUPLINGS/ FLANGES       |                 |
| 27.                                                                                                                                                                         | ACCESSORIES BY VENDOR:          |                 |
| 27.1                                                                                                                                                                        | FOUNDATION BOLTS                |                 |
| 27.2                                                                                                                                                                        | DIFFERENTIAL PRESSURE GAUGE     |                 |
| 27.3                                                                                                                                                                        | DRAIN/ VENT COCK (SS 316)       |                 |
| 27.4                                                                                                                                                                        | SUPPORT LEGS                    |                 |
| 26.                                                                                                                                                                         | HYDROSTATIC TEST PRESSURE, barg | 10.55 Bar       |
| 26.1                                                                                                                                                                        | SHELL SIDE                      | 20 Bar          |
| 26.2                                                                                                                                                                        | JACKET SIDE                     |                 |
| 27.                                                                                                                                                                         | VACUUM TEST REQUIRED            |                 |
| 28.                                                                                                                                                                         | PRESSURE DROP TEST REQUIRED     |                 |
|                                                                                                                                                                             | CLEAN/ 50% CLOGGED              |                 |
| 29.                                                                                                                                                                         | INSPECTION:                     |                 |
| 30.                                                                                                                                                                         |                                 |                 |
| <p><u>NOTES:</u></p> <p>1. GENERAL REQUIREMENTS:</p> <p>2. '*': BIDDER TO FURNISH INFORMATION.</p> <p>3 GASKET SHALL BE METAL WIRE-REINFORCED AND GRAPHITED BOTH SIDES.</p> |                                 |                 |

### 3.19.3 WAFER CHECK VALVES

|                                                 |                                                                  | DATA SHEET A<br>WAFER CHECK VALVES |            | SHEET : 1 OF 1 |    |    |    |  |
|-------------------------------------------------|------------------------------------------------------------------|------------------------------------|------------|----------------|----|----|----|--|
| GENERAL                                         | 1. TAG NO. :                                                     | 4. FLUID : FRESH WATER             | SIZE<br>mm | QUANTITY       |    |    |    |  |
|                                                 | 2. SIZE RANGE : $\geq 50$ NB                                     | 5. DES. PR. : *                    |            |                |    |    |    |  |
|                                                 | 3. RATING : PN 1.0                                               | 6. DES. TEMP. : AMBIENT            |            | P0             | R0 | R1 | R2 |  |
|                                                 | 7. STANDARD : IS 5312                                            | GRADE: CT                          |            |                |    |    |    |  |
| CONSTRUCTION FEATURES                           | 8. TYPE : DUAL PLATE, SPRING-LOADED                              | As per BOQ                         |            |                |    |    |    |  |
|                                                 | 9. ENDS : WAFER TO SUIT ANSI 150 CLASS FLANGES, RF, SERR. FINISH |                                    |            |                |    |    |    |  |
|                                                 | 10.                                                              |                                    |            |                |    |    |    |  |
|                                                 | 11.                                                              |                                    |            |                |    |    |    |  |
|                                                 | 12.                                                              |                                    |            |                |    |    |    |  |
|                                                 | 13.                                                              |                                    |            |                |    |    |    |  |
|                                                 | 14. OTHER REQUIREMENTS :                                         |                                    |            |                |    |    |    |  |
|                                                 |                                                                  |                                    |            |                |    |    |    |  |
|                                                 |                                                                  |                                    |            |                |    |    |    |  |
|                                                 |                                                                  |                                    |            |                |    |    |    |  |
| MATERIALS                                       | 15. BODY : CI, IS 210 Gr. FG 260                                 |                                    |            |                |    |    |    |  |
|                                                 | 16. PLATE : CARBON STEEL                                         |                                    |            |                |    |    |    |  |
|                                                 | 17. SEAL : NITRILE                                               |                                    |            |                |    |    |    |  |
|                                                 | 18. PLATE SEAT : MFR'S STANDARD                                  |                                    |            |                |    |    |    |  |
|                                                 | 19. SPRING : SPRING STEEL                                        |                                    |            |                |    |    |    |  |
|                                                 | 20. HINGE PIN & STOP PIN : SS 304                                |                                    |            |                |    |    |    |  |
|                                                 | 21.                                                              |                                    |            |                |    |    |    |  |
| P E C                                           | 24. SHELL HYDRO : 15 Bar                                         |                                    |            |                |    |    |    |  |
|                                                 | 25. SEAT HYDRO : 10 Bar                                          |                                    |            |                |    |    |    |  |
|                                                 | 26. INSPECTION :                                                 |                                    |            |                |    |    |    |  |
| <p><u>NOTES:</u> 1. GENERAL REQUIREMENTS :.</p> |                                                                  |                                    |            |                |    |    |    |  |



### 3.19.4 BALL VALVES

|                       |                            | DATA SHEET A<br>BALL VALVES |                 | SHEET : 1 OF 1 |          |    |    |    |
|-----------------------|----------------------------|-----------------------------|-----------------|----------------|----------|----|----|----|
| GENERAL               | 1. TAG NO.                 | :                           |                 | SIZE           | QUANTITY |    |    |    |
|                       | 2. SIZE RANGE              | :                           | ≤ 50 NB         |                |          |    |    |    |
|                       | 3. RATING                  | :                           |                 | mm             | P0       | R0 | R1 | R2 |
|                       | 4. GRADE                   | :                           |                 |                |          |    |    |    |
| CONSTRUCTION FEATURES | 5. PORT                    | :                           |                 | As per BOQ     |          |    |    |    |
|                       | 6. STEM                    | :                           |                 |                |          |    |    |    |
|                       | 7. ENDS                    | :                           | Screwed         |                |          |    |    |    |
|                       | 8. OPERATION               | :                           |                 |                |          |    |    |    |
|                       | 9. ANTISTATIC FEATURE      | :                           |                 |                |          |    |    |    |
|                       | 10. FIRE SAFE DESIGN       | :                           | NA              |                |          |    |    |    |
|                       | 11. OTHER REQUIREMENTS     | :                           |                 |                |          |    |    |    |
|                       |                            |                             |                 |                |          |    |    |    |
|                       |                            |                             |                 |                |          |    |    |    |
|                       |                            | SIZE, (in/ mm) :            |                 |                |          |    |    |    |
|                       | INS. THK., mm :            |                             |                 |                |          |    |    |    |
| MATERIALS             | 12. BODY                   |                             | FORGED BRASS    |                |          |    |    |    |
|                       | 13. BALL (MIRROR FINISHED) |                             | STAINLESS STEEL |                |          |    |    |    |
|                       | 14. STEM                   |                             | STAINLESS STEEL |                |          |    |    |    |
|                       | 15. SEAT                   |                             | GLASS FILLED    |                |          |    |    |    |
|                       | 16. SEAL (STEM & BODY)     |                             | -               |                |          |    |    |    |
|                       | 17. BOLTS, STUDS & NUTS    |                             | MILD STEEL      |                |          |    |    |    |
|                       | 18.                        |                             |                 |                |          |    |    |    |
| SPECIFICATION         | 19. SHELL HYDRO            | :                           | 25Bar           |                |          |    |    |    |
|                       | 20. SEAT HYDRO             | :                           | 16 Bar          |                |          |    |    |    |
|                       | 21. SEAT AIR               | :                           |                 |                |          |    |    |    |
|                       | 22. INSPECTION :           |                             |                 |                |          |    |    |    |
|                       |                            |                             |                 |                |          |    |    |    |

|                                    |   |                                         |
|------------------------------------|---|-----------------------------------------|
| <b>3.19.5 PUMPS</b>                |   |                                         |
| <b>Pump</b>                        |   | DOMESTIC WATER TRANSFER<br>PUMP (2W+1S) |
| Make                               | : |                                         |
| Type & Model                       | : |                                         |
| Discharge in LPS / GPM             | : | 3lps                                    |
| Head (Meters of WC)                | : | 40                                      |
| Shut off Head (Meters of WC)       | : |                                         |
| Efficiency (%)                     | : | 70                                      |
| No. of Stages                      |   |                                         |
| Suction End I.D.                   | : |                                         |
| Delivery End I.D.                  | : |                                         |
| Details of N.P.S.H.                | : |                                         |
| Vibration Isolation Detail         | : |                                         |
| Skid Details                       | : |                                         |
| Operating Weight                   | : |                                         |
| Overall Dimension (MM)             | : |                                         |
| Mechanical Seal Detail             | : |                                         |
| <b>Material</b>                    |   |                                         |
| Body                               | : | c.i                                     |
| Impeller                           | : | ss                                      |
| Type of Impeller                   |   |                                         |
| Shaft                              | : | SS                                      |
| Is it suitable for direct coupling | : |                                         |
| <b>Motor</b>                       | : |                                         |
| Make                               | : |                                         |

|                                             |   |                                         |
|---------------------------------------------|---|-----------------------------------------|
|                                             |   |                                         |
| Model                                       | : |                                         |
|                                             |   |                                         |
| Power Requirement (HP / KW)                 | : | 3 HP                                    |
|                                             |   |                                         |
| R.P.M.                                      | : | 2900                                    |
|                                             |   |                                         |
| Rating                                      | : |                                         |
|                                             |   |                                         |
| Over Load Capacity                          | : |                                         |
|                                             |   |                                         |
| Class of Insulation                         | : |                                         |
|                                             |   |                                         |
| Details of Additional protection in winding | : |                                         |
|                                             |   |                                         |
| Motor Efficiency                            | : |                                         |
|                                             |   |                                         |
| It it suitable for direct coupling to pump? | : |                                         |
|                                             |   |                                         |
| Type of rotary movement                     | : |                                         |
|                                             |   |                                         |
| Method of Starting                          | : |                                         |
|                                             |   |                                         |
| Size and type of cable for connections.     | : |                                         |
|                                             |   |                                         |
| Number of variable frequency drive          | : |                                         |
|                                             |   |                                         |
| Detail of VFD                               | : |                                         |
| TRANSFER PUMPS 2                            |   |                                         |
|                                             |   |                                         |
| Pump                                        |   | FLUSHING WATER TRANSFER<br>PUMP (2W+1S) |
|                                             |   |                                         |
| Make                                        | : |                                         |
|                                             |   |                                         |
| Type & Model                                | : |                                         |
|                                             |   |                                         |
| Discharge in LPS / GPM                      | : | 3lps                                    |
|                                             |   |                                         |
| Head (Meters of WC)                         | : | 40                                      |
|                                             |   |                                         |
| Shut off Head (Meters of WC)                | : |                                         |
|                                             |   |                                         |
| Efficiency (%)                              | : | 70                                      |
|                                             |   |                                         |
| No. of Stages                               |   |                                         |
|                                             |   |                                         |
| Suction End I.D.                            | : |                                         |
|                                             |   |                                         |
| Delivery End I.D.                           | : |                                         |
|                                             |   |                                         |
| Details of N.P.S.H.                         | : |                                         |

|                                             |   |      |
|---------------------------------------------|---|------|
|                                             |   |      |
| Vibration Isolation Detail                  | : |      |
|                                             |   |      |
| Skid Details                                | : |      |
|                                             |   |      |
| Operating Weight                            | : |      |
|                                             |   |      |
| Overall Dimension (MM)                      | : |      |
|                                             |   |      |
| Mechanical Seal Detail                      | : |      |
|                                             |   |      |
| Material                                    |   |      |
|                                             |   |      |
| Body                                        | : | C.I  |
|                                             |   |      |
| Impeller                                    | : | SS   |
|                                             |   |      |
| Type of Impeller                            |   |      |
|                                             |   |      |
| Shaft                                       | : | SS   |
|                                             |   |      |
| Is it suitable for direct coupling          | : |      |
|                                             |   |      |
| Motor                                       | : |      |
|                                             |   |      |
| Make                                        | : |      |
|                                             |   |      |
| Model                                       | : |      |
|                                             |   |      |
| Power Requirement (HP / KW)                 | : | 3 HP |
|                                             |   |      |
| R.P.M.                                      | : | 2900 |
|                                             |   |      |
| Rating                                      | : |      |
|                                             |   |      |
| Over Load Capacity                          | : |      |
|                                             |   |      |
| Class of Insulation                         | : |      |
|                                             |   |      |
| Details of Additional protection in winding | : |      |
|                                             |   |      |
| Motor Efficiency                            | : |      |
|                                             |   |      |
| It it suitable for direct coupling to pump? | : |      |
|                                             |   |      |
| Type of rotary movement                     | : |      |
|                                             |   |      |
| Method of Starting                          | : |      |
|                                             |   |      |
| Size and type of cable for connections.     | : |      |
|                                             |   |      |
| Number of variable frequency drive          | : |      |

|               |   |  |
|---------------|---|--|
| Detail of VFD | : |  |
|---------------|---|--|

### 3.19.6 FLOAT TYPE LEVEL SWITCHES

|     |                                                                                                                                                                                                                                                                   |     |
|-----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
| 1.  | FLOAT TYPE LEVEL SWITCHES<br>DATA SHEET A<br>GENERAL                                                                                                                                                                                                              |     |
| 2.  | Manufacturer : [ ]                                                                                                                                                                                                                                                | [*] |
| 3.  | Model no.: [ ]                                                                                                                                                                                                                                                    | [*] |
| 4.  | FEATURES                                                                                                                                                                                                                                                          |     |
| 5.  | Type: Magnetic float with guide tube <input checked="" type="checkbox"/><br>Tilt type <input type="checkbox"/>                                                                                                                                                    | [✓] |
| 6.  | Accuracy: ± 2 MM                                                                                                                                                                                                                                                  | [✓] |
| 7.  | Mounting: Direct <input checked="" type="checkbox"/><br>External chamber <input type="checkbox"/>                                                                                                                                                                 | [✓] |
| 8.  | GUIDED FLOAT TYPE                                                                                                                                                                                                                                                 |     |
| 9.  | Switch type: glass encapsulated hermetically sealed<br>reed switch <input type="checkbox"/>                                                                                                                                                                       | [✓] |
| 10. | Minimum distance between reed switches                                                                                                                                                                                                                            | [*] |
| 11. | No. of floats: single <input type="checkbox"/> multiple <input checked="" type="checkbox"/><br>Refer followup sheet                                                                                                                                               | [✓] |
| 12. | C-C distance for external chamber mounted<br>switches: .....mm                                                                                                                                                                                                    | [✓] |
| 13. | TILT TYPE                                                                                                                                                                                                                                                         |     |
| 14. | Switch type: Microswitch encapsulated in float                                                                                                                                                                                                                    |     |
| 15. | No. of floats: single <input type="checkbox"/> multiple <input type="checkbox"/><br>Refer followup sheet                                                                                                                                                          |     |
| 16. | ENCLOSURE PROTECTION:                                                                                                                                                                                                                                             |     |
| 17. | Housing : IP-65 <input checked="" type="checkbox"/> IP_ _ <input type="checkbox"/>                                                                                                                                                                                | [✓] |
| 18. | Certification/ approval type:<br>Ex d <input type="checkbox"/> Ex ia <input type="checkbox"/> NA <input type="checkbox"/>                                                                                                                                         | [✓] |
| 19. | Housing colour: Grey <input type="checkbox"/> Black <input type="checkbox"/>                                                                                                                                                                                      | [✓] |
| 20. | Ex-proof to zone: 0 <input type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/><br>Group: I <input type="checkbox"/> IIA <input type="checkbox"/> IIB <input type="checkbox"/> IIC <input type="checkbox"/><br>Temperature class: T1/2/3/4/5/6 | [✓] |
| 21. | SUPPLY / SIGNAL                                                                                                                                                                                                                                                   | [ ] |
| 22. | Switch contacts:<br>SPDT <input checked="" type="checkbox"/> 1 NO                                                                                                                                                                                                 | [✓] |
| 23. | Switch contact rating :<br>0.2A, 220V DC / 5A , 230VAC                                                                                                                                                                                                            | [✓] |
| 24. | MATERIAL:                                                                                                                                                                                                                                                         |     |
| 25. | External chamber with drain/ vent arrangement:<br>CS A105 <input type="checkbox"/> SS 316 <input checked="" type="checkbox"/> PP <input type="checkbox"/>                                                                                                         | [✓] |
| 26. | Float: 316 SS <input checked="" type="checkbox"/> PP <input type="checkbox"/> Others <input type="checkbox"/>                                                                                                                                                     | [✓] |
| 27. | Guide tube: 316 SS <input checked="" type="checkbox"/> PP <input type="checkbox"/>                                                                                                                                                                                | [✓] |
| 28. | Bolts & nuts :<br>ASTM A 193 Gr.B7 / A194 Gr.2H                                                                                                                                                                                                                   | [✓] |
| 29. | Gaskets : PTFE <input checked="" type="checkbox"/> OTHERS <input type="checkbox"/>                                                                                                                                                                                | [✓] |
| 30. | Wetted parts: SS 316 <input checked="" type="checkbox"/> PP <input type="checkbox"/><br>OTHERS <input type="checkbox"/>                                                                                                                                           | [✓] |

|     |                                                                                                                                                                                                                                                    |                                     |
|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| 31. | Flange: SS 316 <input checked="" type="checkbox"/> PP <input type="checkbox"/>                                                                                                                                                                     | <input checked="" type="checkbox"/> |
| 32. | Housing: Die cast Aluminium <input checked="" type="checkbox"/> SS 316 <input type="checkbox"/><br>Polyamide <input type="checkbox"/>                                                                                                              | <input checked="" type="checkbox"/> |
| 33. | Cable for tilt switch:                                                                                                                                                                                                                             |                                     |
| 34. | Counter weight for titl type switch:                                                                                                                                                                                                               |                                     |
| 35. |                                                                                                                                                                                                                                                    |                                     |
| 36. | CONNECTION & DIMENSIONS                                                                                                                                                                                                                            |                                     |
| 37. | External chamber connection type:<br>Upper side - lower side <input type="checkbox"/><br>Upper side - lower bottom <input type="checkbox"/>                                                                                                        | <input checked="" type="checkbox"/> |
| 38. | External chamber process connection size: ½" <input type="checkbox"/><br>1" <input type="checkbox"/> others <input type="checkbox"/><br>Type : NPT <input checked="" type="checkbox"/> flange <input type="checkbox"/> SW <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| 39. | External chamber instrument flange: ANSI class<br>150 RF flanged (Refer note 3.0)                                                                                                                                                                  | <input checked="" type="checkbox"/> |
| 40. | Drain arrangement for external chamber<br>Valve <input type="checkbox"/> Plug <input type="checkbox"/>                                                                                                                                             | <input checked="" type="checkbox"/> |
| 41. | Vent plug                                                                                                                                                                                                                                          | <input checked="" type="checkbox"/> |
| 42. | Process connction for direct mounted: ANSI class<br>150 RF flanged(Refer note 3.0)                                                                                                                                                                 | <input checked="" type="checkbox"/> |
| 43. | Cable entry: 1"ET <input type="checkbox"/> ½ " NPT <input type="checkbox"/> others <input type="checkbox"/>                                                                                                                                        | <input checked="" type="checkbox"/> |
| 44. | ACCESSORIES                                                                                                                                                                                                                                        |                                     |
| 45. | Still well for direct mounting                                                                                                                                                                                                                     | <input checked="" type="checkbox"/> |
| 46. | Counter weight to keep tilt type switch cable and<br>float in position                                                                                                                                                                             |                                     |
| 47. | Name plate : Removable – SS                                                                                                                                                                                                                        | <input checked="" type="checkbox"/> |
| 48. | Metal tag – SS                                                                                                                                                                                                                                     | <input checked="" type="checkbox"/> |
| 49. | Counter flanges                                                                                                                                                                                                                                    | <input checked="" type="checkbox"/> |
| 50. | CODES AND STANDARDS                                                                                                                                                                                                                                |                                     |
| 51. | Refer note no. 6.0                                                                                                                                                                                                                                 | <input checked="" type="checkbox"/> |

|     |                                                                                                                               |                                     |
|-----|-------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| 52. | <b><u>SPARES</u></b>                                                                                                          |                                     |
| 53. | Minimum one (1) no. Or 10% of total qty., whichever is higher, for each type and model no.                                    | <input checked="" type="checkbox"/> |
| 54. |                                                                                                                               |                                     |
| 55. | <b><u>TESTS</u></b>                                                                                                           |                                     |
| 56. | Material test / contact rating test / hydro test / calibration test                                                           | <input checked="" type="checkbox"/> |
| 57. | Valid type test certificate to be provided for enclosure protection .                                                         | <input checked="" type="checkbox"/> |
| 58. | Vendor to submit test certificates for owner / engineer's review & records                                                    | <input checked="" type="checkbox"/> |
| 59. | <b><u>DRAWING</u></b>                                                                                                         |                                     |
| 60. | The vendor to submit data sheet, dimensional drawing and erection sketch for review and<br>comments by purchaser/ consultant. | <input checked="" type="checkbox"/> |
| 61. | The vendor shall submit all operating and service manuals for the equipment supplied for records                              | <input checked="" type="checkbox"/> |

**NOTES:**

|               |                                                                                                                                                                                                                 |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>NOTES:</b> |                                                                                                                                                                                                                 |
| 1.0           | Bidder to submit list of installations and commissions for the make & type of instrument offered and user's certificates.                                                                                       |
| 2.0           | Bidder to furnish details (*); required (✓); not required (-).                                                                                                                                                  |
| 3.0           | Float size shall be suitable to process conditions and tank height. Accordingly, instrument flange size shall be selected.                                                                                      |
| 4.0           | For qty. Refer to the attached bill of material.                                                                                                                                                                |
| 5.0           | All accessories shall be supplied as specified. In addition, any other accessories required shall be supplied without any price implication to make the measurement complete to match with process requirement. |
| 6.0           | Bidder shall indicate all applicable codes and standards.                                                                                                                                                       |

### 3.39.6 SOLENOID VALVE

|     |                                                                                                                                            |     |                                                                       |
|-----|--------------------------------------------------------------------------------------------------------------------------------------------|-----|-----------------------------------------------------------------------|
| 1.  | <b>DATA SHEET A<br/>GENERAL</b>                                                                                                            | 35. | Protection For Rust Prevention                                        |
| 2.  | Manufacturer                                                                                                                               | 36. | Painting Standard : As Per IS-6005, 1970                              |
| 3.  | Model No.                                                                                                                                  | 37. | Painting Standard : As Per IS-6005, 1970                              |
| 4.  | Service                                                                                                                                    | 38. | <b>ACCESSORIES</b>                                                    |
| 5.  | <b>PROCESS DATA</b>                                                                                                                        | 39. | Name Plate : Required                                                 |
| 6.  | Fluid                                                                                                                                      | 40. | Metalling enclosure for connecting flying leads: Required             |
| 7.  | Pipe size                                                                                                                                  | 41. | <b>CODES AND STANDARDS</b>                                            |
| 8.  | Operating Pressure : kg/sQcm                                                                                                               | 42. | ASME, ASTM, IEEE, IBR                                                 |
| 9.  | Operating Temperature : °C                                                                                                                 | 43. | Weather Proof : IS 13947 PART I                                       |
| 10. | Operating Flow                                                                                                                             |     | Ex. Proof : IS 2148 / BS EN 50014 / BS EN 50020                       |
| 11. |                                                                                                                                            | 44. | <b>TEST</b>                                                           |
| 12. | <b>FEATURES</b>                                                                                                                            | 45. | Performance; Required                                                 |
| 13. | Shut Off Class (Leakage)                                                                                                                   | 46. | Hydro Test : Required                                                 |
| 14. | Type : Pilot <input checked="" type="checkbox"/> Direct <input type="checkbox"/>                                                           | 47. | Seat Leakage Test : Required                                          |
| 15. | Body Rating : ANSI Class 300 <input type="checkbox"/> <input type="checkbox"/>                                                             | 48. | CV Test : Certificate to be furnished                                 |
| 16. | Duty : Continuous <input type="checkbox"/> Intermittent <input type="checkbox"/>                                                           | 49. | Coil Insulation Test : Required                                       |
| 17. | No. of Ports / No. of Ways : 3/2 <input type="checkbox"/> 5/2 <input type="checkbox"/>                                                     | 50. | Test Certificate From PESO : Required for all exproof solenoid valves |
| 18. | Power Supply : 230 V AC <input type="checkbox"/> 110 VAC <input type="checkbox"/> 24 VDC <input type="checkbox"/> <input type="checkbox"/> |     |                                                                       |
| 19. | Style Of Coil : Moulded                                                                                                                    |     |                                                                       |
| 20. | Coil Insulation : Class F for high temp. as per IEC 60085/IS 1271                                                                          |     |                                                                       |
| 21. | <b>MATERIAL OF CONSTRUCTION</b>                                                                                                            |     |                                                                       |
| 22. | Body Material : Bronze <input type="checkbox"/> SS 316 <input checked="" type="checkbox"/> <input type="checkbox"/>                        |     |                                                                       |
| 23. | Seat Material : SS 316 <input checked="" type="checkbox"/> Teflon <input type="checkbox"/> <input type="checkbox"/>                        |     |                                                                       |
| 24. | Plunger Material : SS316 <input type="checkbox"/> <input type="checkbox"/>                                                                 |     |                                                                       |

|     |                                                                                                                                                                                                                                                                                                                                                                      |  |  |  |  |
|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|
| 25. | Packing Material                                                                                                                                                                                                                                                                                                                                                     |  |  |  |  |
| 26. | <b>ENCLOSURE PROTECTION</b>                                                                                                                                                                                                                                                                                                                                          |  |  |  |  |
| 27. | Weather Proof To : IP 67 & 68                                                                                                                                                                                                                                                                                                                                        |  |  |  |  |
| 28. | Ex-Proof To: Zone 1 <input type="checkbox"/> ZONE 2 <input type="checkbox"/><br>Group IIA <input type="checkbox"/> IIB <input type="checkbox"/> IIC <input type="checkbox"/><br>Temp.Class : T1 <input type="checkbox"/> T2 <input type="checkbox"/> T3 <input type="checkbox"/> T4 <input type="checkbox"/> T5 <input type="checkbox"/> T6 <input type="checkbox"/> |  |  |  |  |
| 29. | Intrinsic safe certified                                                                                                                                                                                                                                                                                                                                             |  |  |  |  |
| 30. | <b>CONNECTION AND DIMENSIONS</b>                                                                                                                                                                                                                                                                                                                                     |  |  |  |  |
| 31. | Process Connection Type : NPT <input type="checkbox"/> BSP <input checked="" type="checkbox"/>                                                                                                                                                                                                                                                                       |  |  |  |  |
| 32. | Size                                                                                                                                                                                                                                                                                                                                                                 |  |  |  |  |
| 33. | Cable Entry Size : 1" ET <input type="checkbox"/> <input type="checkbox"/>                                                                                                                                                                                                                                                                                           |  |  |  |  |
| 34. | <b>PAINTING</b>                                                                                                                                                                                                                                                                                                                                                      |  |  |  |  |

**Notes:-**

|    |                                                                                                                                                                                                                                               |
|----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1. | * - Bidder to furnish details.                                                                                                                                                                                                                |
| 2. | All accessories shall be supplied as applicable.                                                                                                                                                                                              |
| 3. | The bidder shall indicate all applicable codes and standards                                                                                                                                                                                  |
| 4. | The solenoid coil shall operate the valve even when the supply voltage drops down by 15% or goes up by 10%.                                                                                                                                   |
| 5. | The coil shall be wired to a terminal block located inside the housing. Flying lead wires of the coil are not acceptable. the material of housing shall be metallic unless otherwise indicated in data sheet.                                 |
| 6. | Each solenoid valve body shall be subjected to pneumatic pressure test by air / nitrogen with test pressure not less than 1.5 times the maximum working pressure (rated) of the valve. There shall not be any visible leakage during the test |
| 7. | Each solenoid valve shall be subjected to seat leakage test by air / nitrogen with test pressure equal to maximum working pressure (rated) of the valve for one minute. There shall not be any seat leakage during this test.                 |
| 8. | The coil shall be low power consumption type. Generally the power consumption of coil shall be less than 5 W.                                                                                                                                 |

### 3.19.7 ELECTRICAL TECHNICAL DATA SHEETS

**For MCC +PDBs+MLDBs/SLDBs/DBs ( To be filled by the bidders)**

| S.No. | Description | Recommended Specification | Confirmation by the Bidders |
|-------|-------------|---------------------------|-----------------------------|
|       |             |                           |                             |



|     |                          |                                                                                                     |  |
|-----|--------------------------|-----------------------------------------------------------------------------------------------------|--|
| 1   | Type of Panel            | a. MCC non drawout type compartmentalized.<br><br>b. Panels non drawout type, non compartmentalized |  |
| 2   | Type of Mounting         | Free standing Floor Mounted                                                                         |  |
| 3   | Fault kA                 | 50kA -1 Sec for MCC                                                                                 |  |
| 4   | Thickness of CRCA sheets |                                                                                                     |  |
| a   | Structural members       | 3mm                                                                                                 |  |
| b   | Covers and doors         | 2mm                                                                                                 |  |
| c   | Base channel             | MCC - ISMC 100                                                                                      |  |
| d   | Gland plate              | 3mm                                                                                                 |  |
| 5a. | Painting/ Process        | Synthetic Enamel Paint<br><br>As per seven tank process<br><br>Oven baked.                          |  |
| b   | Paint shade;             |                                                                                                     |  |
|     | a. Inside                | RAL – 7032                                                                                          |  |
|     | b. Outside               | RAL - 7032                                                                                          |  |
| 6   | Details of busbars       | Electrolytic grade Copper of specified rating for details                                           |  |

|    |                                                          |                                                                               |  |
|----|----------------------------------------------------------|-------------------------------------------------------------------------------|--|
|    |                                                          | see constructional features mentioned in specifications                       |  |
| 7  | Cable Entry                                              | For MCC & other Panels<br><br>Top or Bottom depending upon location of Panel. |  |
| 8  | Enclosure<br><br>Protection/<br><br>Ventilation          | For MCC – IP -52 with louvers for Ventilation.                                |  |
| 9  | Control Wiring/<br><br>Power Wiring                      | Insulated 660Volts Cu wire.                                                   |  |
| a. | Voltage Circuit                                          | 1.5 sq mm                                                                     |  |
| b. | Current Circuit                                          | 2.5 sq mm                                                                     |  |
| c. | Minimum size of Power wiring CKt                         | 16 sq mm                                                                      |  |
| 10 | Maximum Operating Height                                 | 2100                                                                          |  |
| 11 | Mounting height of Relays/Meters<br><br>Control Switches | Range 350mm to 1900mm                                                         |  |

### 3.19.8 CONSTRUCTIONAL FEATURES FOR MCC

| S.No. | Description          | Recommended Specification          | Confirmation by the Bidders |
|-------|----------------------|------------------------------------|-----------------------------|
| 1     | MCC                  |                                    |                             |
| a.    | Busbar Chamber       | 400mm ht                           |                             |
| b.    | Metering Chamber     | 400mm ht                           |                             |
| c.    | Incoming Compartment | 1000mm wide Module<br>Single Tier  |                             |
| d.    | Overall Height       | 2100 mm                            |                             |
| e.    | Overall Depth        | 1300 & 900 mm                      |                             |
| f.    | Overall Length       | ( To be indicated by the bidder)   |                             |
| g.    | Construction         | IP-52 with louvers for ventilation |                             |

|      |                                |                                                                  |  |
|------|--------------------------------|------------------------------------------------------------------|--|
| h.   | Current Density                | 1.25 Amp / Sq.mm                                                 |  |
| i.   | Main Bus                       | 1.75 Amp / Sq.mm                                                 |  |
| ii.  | Branch Bus Rating              | 75% of aggregate Switches connected.<br>1.25 Amp / Sq.mm Density |  |
| iii. | Neutral Bus                    | Half of the size of phase bus                                    |  |
| iv.  | Earth Bus                      | Half of the size of phase bus                                    |  |
| j.   | Incoming and outgoing feeders. | As per SLD                                                       |  |

### **3.20 LIST OF APPROVED MAKES FOR PLUMBING AND SANITARY WORKS**

**NOTE:** LIST OF APPROVED MAKES FOR PRODUCTS AND MATERIALS FOR PLUMBING AND SANITARY WORKS ARE INDICATED IN THE TABLE BELOW. HOWEVER, ANY OTHER MAKE WHICH IS EQUIVALENT AND MEETING THE TENDER SPECIFICATIONS ARE ALSO ACCEPTABLE WITH PRIOR APPROVAL OF THE ENGINEER.

| S.NO. | DETAILS OF MATERIALS / EQUIPMENT | MANUFACTURER'S NAME                          |
|-------|----------------------------------|----------------------------------------------|
| 1.    | a. Vitreous China Sanitaryware   | Hindustan<br>Parryware /or<br>Approved Local |
| 2.    | W.C Seat Covers                  | Admiral<br>Tara or<br>Approved Local         |
| 3.    | a. Low level Flushing cisterns   | Commander<br>Duralite or<br>Approved Local   |
|       | b. WC Connectors                 | Multiwik<br>Viega or<br>Approved Local       |
| 4.    | Bath Tub and Shower Tray         | Aquaplast                                    |

|     |                                 |                                                      |
|-----|---------------------------------|------------------------------------------------------|
|     |                                 | Parryware or<br>Approved Local                       |
| 5.  | Stainless Steel Sink            | Cobra or<br>Jayna<br>Nirali<br>Approved Local        |
| 6.  | Cistern                         | Commandor or Approved Local<br>Champion<br>Parryware |
| 7.  | CP Brass Fittings               | Parryware<br>or Approved local                       |
| 8.  | Flow Control Devices            | Jaquar<br>RST<br>or Approved Local                   |
| 9.  | Storage Type Geyser             | Bajaj<br>Venus<br>or Approved Local                  |
| 10. | Floor Drain Fixture, Rain Water | ACO                                                  |

|     |                                                                                        |  |                                                                      |
|-----|----------------------------------------------------------------------------------------|--|----------------------------------------------------------------------|
|     | Outlets                                                                                |  | GMGR<br>Neer<br>or Approved Local                                    |
| 11. | Urinal Trap                                                                            |  | Chilly<br>Neer<br>or Approved Local                                  |
| 12. | ULTRA LOW FLOW FIXTURES-<br>(Flush valves, Faucets, Bib taps)<br>Low Flow C.P Fittings |  | Hindware<br>Parryware<br>or Approved Local                           |
|     |                                                                                        |  |                                                                      |
| 13. | Water Cooler                                                                           |  | Aquaguard<br>Blue star<br>or Approved Local                          |
| 14. | C.P. Grating for Floor Trap                                                            |  | Chilly<br>GMGR<br>Neer<br>or Approved Local                          |
| 16. | GI pipes fittings                                                                      |  | Crescent Engg Corp. Jalandhar<br>KS Engg<br>RM Engg works, ahmedabad |

|     |                                          |  |                                                                            |
|-----|------------------------------------------|--|----------------------------------------------------------------------------|
|     |                                          |  | Zoloto or Approved Local                                                   |
| 17. | GI/MS Pipe Protection Wrapping & Coating |  | IWL - Pypkote<br>Neotape<br>Rustech – Coatek<br>STP Ltd. or Approved Local |
| 18. | Pipe clamp & supports                    |  | Diamond<br>Easyflex<br>Intellotech or Approved Local                       |
| 19. | Pipe Hangers                             |  | Hitech<br>OM fasteners<br>or Approved Local                                |
| 20. | RO UNIT                                  |  | Aqua Guard<br>Kent<br>Konark<br>or Approved Local                          |
| 21. | UPVC Pipe                                |  | Finolex<br>Jain                                                            |



|     |                               |  |                                                    |
|-----|-------------------------------|--|----------------------------------------------------|
|     |                               |  | Kisan<br>Prince                                    |
| 22. | CPVC pipes & fittings         |  | Ajay<br>Ashirwad<br>Astral<br>Prince               |
| 23. | Teflon Tape                   |  | Approved local                                     |
| 24. | Toilet Accessories            |  | Akoi<br>Parko or Approved local                    |
| 25. | GM / Forged Brass Ball Valves |  | Jayhiwa<br>Leader<br>Zoloto or Approved local      |
| 26. | Gate Valve / Sluice Valves    |  | Advance<br>Kirloskar<br>Jainsons<br>SANT<br>Zoloto |

|     |                            |  |                                                          |
|-----|----------------------------|--|----------------------------------------------------------|
|     |                            |  |                                                          |
| 27. | Butterfly Valve            |  | Zoloto<br>Jayhiwa<br>Pipeline Products or Approved local |
| 28. | Check Valve – WaferType    |  | Kirloskar<br>Jayhiwa<br>Zoloto or Approved local         |
| 29. | Check Valve – Dual Plate   |  | Normex<br>Sant<br>Pipeline Products or Approved local    |
| 30. | Cast Iron Non Return valve |  | Leader<br>Zoloto<br>Pipeline Products or Approved local  |
| 31. | Check Valve Forged Screwed |  | Leader<br>Pipeline Products<br>RB<br>Zoloto              |
| 32. | Pressure Reducing Valve    |  | RB<br>OR                                                 |

|     |                                      |                                                    |
|-----|--------------------------------------|----------------------------------------------------|
| 33. | Solenoid Valve                       | Avcon<br>Uflow<br>Danfoss or local approveds       |
| 34. | Thermostatic mixing valve            | Danfoss<br>Overtrop                                |
| 35. | Air Release Valve                    | OR<br>Pipeline Products<br>Zoloto                  |
| 36. | Ball Float Valve                     | Prayag<br>Zoloto                                   |
| 37. | NRV – Ball type – Sewage application | Danfoss or Approved local<br>Silverspark<br>Normex |
| 38. | HDPE Tanks                           | Sintex or Approved local<br>Ashish                 |

|     |                                                           |                                                                    |
|-----|-----------------------------------------------------------|--------------------------------------------------------------------|
| 39. | Air Vent Inlet Valve                                      | Jainsons<br>SKS                                                    |
| 40. | FRP/GRP- SMC water tank                                   | Devi Polymers pvt. Ltd.<br>Approved local /Binani                  |
| 41. | FRP/GRP storage tanks                                     | Sintex or Approved local                                           |
| 42. | Y Strainer CI                                             | Leader or Approved local<br>Pipe line products<br>Zoloto           |
| 43. | Storm Water Drainage & Sewage<br>Sump Pumps (Submersible) | Aquasub Engineering<br>HBD<br>Kirloskar<br>KSB                     |
| 44. | Transfer Pumps                                            | Aquasub Engineering<br>CRI Pumps<br>HBD<br>Kirloskar<br>Lubi/Local |

|     |                                                |                                                                        |
|-----|------------------------------------------------|------------------------------------------------------------------------|
| 45. | Self-Priming Pumps                             | Aquasub Engineering<br>CRI Pumps<br>Johnson<br>Kirloskar<br>Lubi/Local |
| 46. | Borewell Pump                                  | Aquasub Engineering<br>CRI Pumps<br>Grundfos<br>Kirloskar              |
| 47. | Anti Vibration Mounting & Flexible Connections | Easyflex<br>Resistoflex                                                |
| 48. | Pressure Gauge                                 | Fiebig<br>H Guru                                                       |
| 49. | Water Meter (Mechanical Type)                  | Capstan or Approved local<br>Kranti<br>Kent                            |
| 50. | Level Controller & Indicator (Water)           | Pumptrol<br>or Approved local<br>RM Engg.                              |

|     |                                          |                                                                |
|-----|------------------------------------------|----------------------------------------------------------------|
|     |                                          | Works, Ahmedabad                                               |
| 51. | Paints                                   | Asian Paints<br>Berger<br>ICI<br>Shalimar Paints               |
| 52. | MH / Water Tank Plastic Steps            | KGM or Approved local<br>Patel<br>Pranali Industries           |
| 53. | Insulation for Hot Water Pipes           | Armacell<br>or Approved local Armaflex<br>K-Flex<br>Thermaflex |
| 54  | Electric Hot Water Generator / Heat Pump | A.O. Smith<br>Bajaj<br>Venus                                   |
| 55. | Solar Heating                            | A.O Smith<br>Vijay Solar<br>Overtrap<br>Honeywell              |

|     |                       |                                               |
|-----|-----------------------|-----------------------------------------------|
| 56. | Grease Trap/Separator | ACO<br>Kessels<br>Wade                        |
| 57. | Welding Rods          | Ador<br>Cosmos<br>Prima (S)<br>Super Bond (S) |
| 58. | Fastener              | Fisher<br>Hilti                               |
| 59. | Fire Sealant          | Birla 3 M, Hilti                              |
| 60. | Level Indicator       | HELLY, PUMPTROL<br>TECHNIKA, TECHTROL         |
| 61. | Temperature Sensor    | Forbes Marshall<br>Danfoss                    |
| 61. | Level Switch          | SBEM<br>RK DUTT                               |

### 3.21 APPROVED MAKES/ MANUFACTURERS( Electrical Equipments):

**NOTE:** LIST OF APPROVED MAKES FOR PRODUCTS AND MATERIALS FOR PLUMBING AND SANITARY WORKS (ELECTRICAL EQUIPMENTS) ARE INDICATED IN THE TABLE BELOW. HOWEVER, ANY OTHER MAKE WHICH IS EQUIVALENT AND MEETING THE TENDER SPECIFICATIONS ARE ALSO ACCEPTABLE WITH PRIOR APPROVAL OF THE ENGINEER.

| SL NO | DESCRIPTION                                | VENDOR/MANUFACTURER/MAKE                                                     |
|-------|--------------------------------------------|------------------------------------------------------------------------------|
| 1     | Protective relays (Numerical Type)         | ABB<br>Siemens<br>GE<br>SEL (Schweitzer Engineering Laboratories)<br>Alstom  |
| 2     | Protective relays (Electromechanical Type) | ABB<br>Siemens<br>GE<br>Schneider Electric (formerly Areva/EE)               |
| 3     | Auxiliary Relay                            | Schneider Electric (formerly Areva/EE)<br>ABB<br>Siemens<br>VA Tech<br>L & T |
| 4     | Electronic circuit Relay                   | OEN<br>Omron                                                                 |



|   |                                                                                                   |                                                                                                                                                                             |
|---|---------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|   |                                                                                                   | Allen Bradley<br>PLA                                                                                                                                                        |
| 5 | Control and Relay Panel                                                                           | ABB<br>Siemens<br>Easun Reyrolle<br>Alstom<br>Schneider Electric                                                                                                            |
| 6 | Instrument Transformers<br>(CT/PT)                                                                | Automatic Electric<br>Crompton Greaves<br>Indcoil<br>Kappa<br>Precise<br>Pragati<br>Gilbert and Maxwell<br>Silkaans<br>Jyoti<br>ECS<br>Schneider Electric<br>ABB<br>Siemens |
| 7 | Switchgear/Switchboard L.V.-<br>Drawout/Fixed Type<br>(PCC/MCC/PMCC/MLD<br>B/MPDB/<br>MOVDB/APFC) | Siemens<br>L&T<br>Schneider Electric                                                                                                                                        |

|    |                                                                      |                                                                                                        |
|----|----------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
|    |                                                                      | ABB                                                                                                    |
| 8  | Air circuit breakers                                                 | L & T<br>Siemens<br>Schneider Electric (M&G)<br>ABB                                                    |
| 9  | MCCB's                                                               | L & T<br>Siemens<br>Schneider Electric (M&G)<br>ABB                                                    |
| 10 | Switch Disconnector Fuse Unit (SDF) And Switch Disconnector Isolator | Siemens<br>Technoelectric<br>Schneider Electric<br>L&T                                                 |
| 11 | Change-over switch                                                   | Havells (euroload)<br>C&S<br>Schneider Electric<br>GE Power<br>Kraus & Naimer<br>Siemens<br>BCH<br>L&T |

|    |                                      |                                                                                                   |
|----|--------------------------------------|---------------------------------------------------------------------------------------------------|
| 12 | VVVF Drives / Electronic Softstarter | Siemens<br>Allen Bradley (Rockwell Automation)<br>Yaskawa<br>Schneider Electric<br>ABB<br>Danfoss |
| 13 | LV capacitors (APP)                  | Universal Cables<br>ABB<br>Malde<br>Madhav<br>Epcos<br>Aswani<br>Schneider Electric<br>L&T        |
| 14 | Series Reactors For Capacitors       | Manohar Brothers<br>WHEPL<br>Epcos                                                                |
| 15 | AC Power Contactor                   | Siemens<br>ABB<br>L&T<br>BCH<br>Schneider Electric (Telemecanique)                                |

|    |                                                  |                                                             |
|----|--------------------------------------------------|-------------------------------------------------------------|
| 16 | DC Power Contactor                               | BCH<br>BHEL<br>Siemens<br>L&T<br>Schneider Electric         |
| 17 | Auxiliary contactors                             | Siemens<br>L & T<br>Schneider Electric (Telemecanique)      |
| 18 | Electronic / Microprocessor based overload relay | Siemens<br>ABB<br>Schneider Electric                        |
| 19 | Bi-metal / Overload Relay                        | Siemens<br>Schneider Electric<br>L&T                        |
| 20 | Thermister relay                                 | Alstom/ Minilec/ Insta controls                             |
| 21 | Single Phasing Preventer                         | Siemens<br>Minilec<br>Alstom<br>Schneider Electric<br>L & T |
| 22 | Time switch                                      | GIC                                                         |

|    |                  |                                                                                                                      |
|----|------------------|----------------------------------------------------------------------------------------------------------------------|
|    |                  | Theben<br>Siemens<br>Schneider Electric<br>Legrand                                                                   |
| 23 | Timers           | GIC<br>Theben<br>BCH<br>Siemens<br>Electronic Automation Pvt Ltd.<br>Minilec<br>L&T<br>Legrand<br>Schneider Electric |
| 24 | Time Delay Relay | Schneider Electric<br>ABB<br>Siemens<br>BCH<br>L&T<br>Omron<br>PLA                                                   |
| 25 | Motors           | Siemens<br>Bharat Bijlee<br>Crompton Greaves<br>Marathon Electric Motors (India) Ltd.                                |

|    |                        |                                                                                                                                                                                         |
|----|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    |                        | (Formerly Alstom Ltd)<br><br>BHEL<br><br>ABB<br><br>Kirloskar                                                                                                                           |
| 26 | Battery Charger & DCDB | Hitachi<br><br>Caldyne Automatics<br><br>Chhabi Electricals<br><br>Mass-tech Controls<br><br>HBL Power Systems<br><br>Automatic Electric<br><br>Amara Raja<br><br>Universal Instruments |
| 27 | Luminaire              | Philips<br><br>Zumtobel<br><br>Crompton Greaves<br><br>Bajaj<br><br>GE                                                                                                                  |
| 28 | Lamps                  | Philips<br><br>GE<br><br>Osram<br><br>Sylvania<br><br>LVD<br><br>Neptune, USA                                                                                                           |

|    |                                 |                                                                                                                                              |
|----|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| 29 | Ballast                         | Philips<br>Crompton Greaves<br>Bajaj<br>ATCO                                                                                                 |
| 30 | LT Power Cables/ Earthing Cable | Universal Cables Ltd.<br>NICCO<br>KEC International Ltd<br>Cable Corporation Of India Ltd<br>Finolex<br>INCAB<br>Polycab<br>LAPP<br>RR Kabel |
| 31 | LT Control Cables               | LAPP<br>Polycab<br>NICCO<br>Universal Cables Ltd.<br>KEC International Ltd<br>Finolex<br>INCAB<br>KEI<br>Cable Corporation Of India Ltd      |
| 32 | HFFR wires (including panel     | Finolex                                                                                                                                      |

|    |                                                                                                   |                                                                                                                                                 |
|----|---------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
|    | wiring)                                                                                           | Polycab<br>LAPP<br>RR Kabel                                                                                                                     |
| 33 | Non-insulated Copper Earthing conductors                                                          | Gupta Industrial Corporation (Vasai, Palghar)<br>Bharat Wires & Ropes<br>Diamond Cables                                                         |
| 34 | Distribution Boards (other than MLDB, MPDB, MOVDB) / Panels / Enclosures / JB / Marshalling Panel | Siemens<br>C&S<br>Schneider Electric<br>Rittal<br>President<br>Enclotek<br>Eldon<br>Hensel<br>Legrand<br>Manshu Comtel<br>Pentair<br>ABB<br>BCH |
| 35 | MCB, RCCB, RCBO / MCB Isolators                                                                   | Legrand<br>Siemens<br>Schneider Electric<br>Klockner Moeller                                                                                    |



|    |                                                                                 |                                                                                                                                                                                                                                      |
|----|---------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    |                                                                                 | ABB                                                                                                                                                                                                                                  |
| 36 | MPCB                                                                            | Siemens<br>Schneider Electric<br>Moeller<br>ABB<br>L&T                                                                                                                                                                               |
| 37 | Alarm Annunciators (solid state type with LED illumination) / Facia Annunciator | Digicont<br>Industrial Instruments & Controls<br>Procon Inst. (P) Ltd<br>MTL India Pvt. Ltd.<br>Rochester Instruments System Ltd.<br>IDECIZUMI<br>Minilec<br>IICP<br>Proton Electronics<br>Alstom<br>Yashmun<br>ICA<br>Ronan (Waree) |
| 38 | Decorative switches, sockets and metal boxes (single plate arrangement)         | Honeywell (MK Electric)<br>Anchor (Panasonic)<br>Havells (Crabtree)                                                                                                                                                                  |
| 39 | Modular switch & socket (wraparound) (twin plate                                | Anchor (Panasonic)                                                                                                                                                                                                                   |

|    |                               |                                                                                                                                             |
|----|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
|    | arrangement)                  | Anchor (Roma / Ave)<br>Honeywell (MK Electric)<br>Legrand<br>Havells (Crabtree)<br>Schneider Electric (Clipsal)<br>Siemens<br>ABB<br>Gewiss |
| 40 | Ceiling fan                   | Usha<br>Crompton Greaves<br>Bajaj<br>Orient<br>Khaitan<br>Almonard                                                                          |
| 41 | Wall mounting fan             | Almonard<br>GEC<br>Crompton<br>Bajaj<br>Orient<br>Usha                                                                                      |
| 42 | Exhaust Fan / Ventilation Fan | Nadi<br>Usha<br>Almonard                                                                                                                    |

|    |                                                        |                                                                                                 |
|----|--------------------------------------------------------|-------------------------------------------------------------------------------------------------|
|    |                                                        | Bajaj<br>Crompton Greaves                                                                       |
| 43 | Air Circulators/Man Coolers<br>(Pedestal/Wall Mounted) | Almonard<br>Bajaj<br>Crompton Greaves                                                           |
| 44 | Cable termination/jointing kits                        | Raychem (Tyco Electronics / RPG)<br>3M(Cold Shrink/Push-on)<br>ABB Kabeldon                     |
| 45 | Control / selector switch                              | Kraus & Naimer<br>Kaycee<br>GE Power controls<br>L&T<br>Siemens<br>ABB<br>Schneider Electric    |
| 46 | Indicating Lamps (Multi-chip<br>LED)                   | Binay<br>Teknic Controls<br>Vaishno<br>Siemens<br>L & T<br>Schneider Electric<br>Concord<br>BCH |

|    |                             |                                                                                                          |
|----|-----------------------------|----------------------------------------------------------------------------------------------------------|
| 47 | Terminal Block / Connectors | Wago / Connectwell / Pheonix / Elmex                                                                     |
| 48 | Control transformer         | Indcoil<br>Precise<br>Silkaans<br>NEC<br>Gauss Electricals                                               |
| 49 | Semiconductor Fuse          | Siemens<br>Schneider Electric (Ferraz Shawmut)<br>Eaton (Cooper Bussmann)<br>GE                          |
| 50 | HRC fuse (Power & Control)  | Siemens<br>L&T<br>GE<br>Eaton (Cooper Bussmann)<br>Technoelectric<br>Schneider Electric (Ferraz Shawmut) |
| 51 | Pushbuttons                 | Siemens<br>Schneider Electric (Telemecanique)<br>Teknic Controls<br>L&T<br>Concord<br>BCH                |

|    |                                                            |                                                                                                                   |
|----|------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
|    |                                                            | Vaishno Electricals                                                                                               |
| 52 | Push button station                                        | Siemens<br>Schneider Electric<br>R Stahl<br>Hensel<br>Bals<br>Gewiss                                              |
| 53 | Non metallic enclosures (including Receptacles) Industrial | Rittal<br>Hensel<br>SCAME<br>Menekkes<br>Bals<br>Siemens<br>Schneider Electric<br>BCH<br>PCE<br>Legrand<br>Gewiss |
| 54 | Digital Meter – Ammeter & Voltmeter                        | Schneider Electric (Conzerv)<br>AE<br>Rishabh<br>Schneider Electric (Power Measurement/ION)<br>Circutor           |

|    |                                           |                                                                                                                                                                                        |
|----|-------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    |                                           | Siemens<br>Masibus                                                                                                                                                                     |
| 55 | Electromechanical – Ammeter & Voltmeter   | Automatic Electric<br>MECO<br>IMP<br>Rishabh                                                                                                                                           |
| 56 | Load Manager / Multi Function Meter / kWh | Schneider Electric (Conzerv / (Power Measurement / ION)<br>Circutor<br>Rishabh<br>Schneider Electric<br>Alpha (ABB)<br>Schlumberger<br>SEMS (Secure)<br>Electro Industries / GaugeTech |
| 57 | Power quality analyser                    | A-eberle<br>Schneider Electric (Power Measurement/ ION)<br>Schneider Electric (Conzerv)<br>Chino – Laxsons<br>Yokogawa<br>Rishabh<br>Fluke<br>Hioki                                    |

|    |                                                       |                                                                                                                       |
|----|-------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| 58 | Cable lugs                                            | Dowells<br>Comet<br>3D (Billets Elektro Werke Pvt.Ltd)                                                                |
| 59 | Cable Glands (safe area - double seal cone grip type) | Comet<br>Jainson<br>Braco<br>Baliga<br>R. Stahl<br>Crouse Hinds<br>Siemens<br>Hex (Brass Copper & Alloy(I))<br>Cosmos |
| 60 | Polyamide Cable Glands                                | Lapp<br>Hensel<br>Gewiss<br>Fibox                                                                                     |
| 61 | Lightning Arrestors                                   | WS<br>Jayshree<br>Elpro<br>Oblum<br>Crompton Greaves                                                                  |
| 62 | Surge Suppressors                                     | OBO                                                                                                                   |

|    |                                                                           |                                                                                                                                                                                                                  |
|----|---------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    |                                                                           | Emerson<br>Furse<br>Dehn+Sohne<br>Erico<br>Pepperl+Fuchs<br>MTL<br>Schneider Electric<br>ABB<br>Weid Muller<br>Siemens<br>Phoenix Contact                                                                        |
| 63 | Uninterrupted Power Supply (UPS)                                          | Emerson Network Power (India) Pvt. Ltd. (Liebert / Chloride)<br>Schneider Electric (MGE / Gutor / APC / Invensys)<br>Aplab<br>Fuji Electric , Japan<br>Hitachi<br>Eaton<br>Riello-PCI<br>Socomec<br>ABB (Newave) |
| 64 | Floor trunking system (GI trays, troughs & pull boxes) and GI Cable trays | OBO<br>Honeywell<br>Legrand                                                                                                                                                                                      |



|    |                                                                            |                                                                                                 |
|----|----------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
|    |                                                                            | Indiana<br>Profab<br>Patny<br>Sadhana<br>Sterlite<br>Reliance<br>Jenco/Pentax Ferro Incorporate |
| 65 | Furniture trunking system / Cable management System                        | Legrand<br>Schneider Electric<br>Rittal<br>Panduit<br>Honeywell<br>Eubiq                        |
| 66 | UPVC Conduit/JB/flexible conduit/tees/ Bevels,elbow & accessories/fittings | Precision<br>Polycab<br>Sudhakar<br>AKG                                                         |
| 67 | GI Conduit / Pipes                                                         | JK Tube Company (AKG)<br>BEC Industries<br>Zenith<br>SAIL<br>TATA Steel<br>Jindal               |

|    |                                                  |                                                                          |
|----|--------------------------------------------------|--------------------------------------------------------------------------|
| 68 | MS Conduit                                       | JK Tube Company (AKG)<br>BEC Industries<br>Jindal<br>TATA Steel<br>SAIL  |
| 69 | Casing Capping                                   | Precision<br>Circle ARK<br>Mody                                          |
| 70 | Lighting Controller / Lighting Management System | Lutron<br>Zumtobel<br>Philips<br>Tridonic Atco                           |
| 71 | Lead Acid Battery (Plante / Tubular)             | Exide<br>HBL Power Systems Ltd.<br>Amara Raja Batteries Ltd.<br>Hoppecke |
| 72 | SMF/VRLA battery                                 | Exide<br>HBL Power Systems Ltd<br>Amara Raja Batteries Ltd.<br>Hoppecke  |
| 73 | Ni – Cd Battery                                  | HBL Power Systems Ltd.<br>Hoppecke                                       |

|    |                               |                                                                                             |
|----|-------------------------------|---------------------------------------------------------------------------------------------|
|    |                               | Amco Saft                                                                                   |
| 74 | High mast lighting system     | Philips<br>Bajaj<br>Crompton Greaves<br>BP Projects<br>Valmont                              |
| 75 | SCADA / EMS                   | ABB<br>Siemens<br>Alstom<br>Schneider Electric<br>Electro Industries / GaugeTech<br>Rishabh |
| 76 | Fire Barriers / Sealing       | Brattberg<br>Roxtec<br>Signum<br>Navell<br>Multikil                                         |
| 77 | Water barriers/sealing system | Roxtec<br>Rayflate (Tyco Electronics)                                                       |
| 78 | Decontactor                   | BCH                                                                                         |
| 79 | Insulating mats               | Electromat<br>Dozz                                                                          |

|    |                                                                       |                                                                             |
|----|-----------------------------------------------------------------------|-----------------------------------------------------------------------------|
|    |                                                                       | Raychem RPG                                                                 |
| 80 | Emergency Light / Installite /<br>Conversion module /<br>Battery Pack | Prolite<br>Legrand<br>Philips<br>Tridonic Atco<br>Zumtobel                  |
| 81 | Choke (for VVVF)                                                      | Siemens<br>ABB<br>Danfoss<br>Allen Bradley (Rockwell Automation)<br>Yaskawa |
| 82 | Power Supply Unit                                                     | Siemens<br>MTL<br>Aplab<br>Pheonix<br>Cosel                                 |
| 83 | PLC                                                                   | Allen Bradley<br>Siemens<br>Schneider Electric                              |
| 84 | Voltage / Power / Current /<br>Frequency / Energy<br>Transducer       | ABB<br>AE<br>Siemens                                                        |

|    |                                                   |                                                                        |
|----|---------------------------------------------------|------------------------------------------------------------------------|
|    |                                                   | Schneider Electric<br>Rishabh<br>Masibus                               |
| 85 | Encoders                                          | Hubner<br>Honeywell<br>Turck                                           |
| 86 | Limit Switch                                      | BCH<br>Honeywell<br>Siemens<br>Jay Balaji<br>Wago                      |
| 87 | Aviation Obstruction Light<br>(multiple LED type) | Binay                                                                  |
| 88 | Diesel Engines                                    | Cummins<br>Caterpillar<br>MTU<br>Mitsubishi<br>Wartsila<br>Rolls Royce |
| 89 | Alternators for DG Sets                           | Cummins (Stamford / AvK)<br>Leroy Somer<br>BHEL                        |

|    |                                                   |                                             |
|----|---------------------------------------------------|---------------------------------------------|
| 90 | Digital Multimeter for Operation<br>& Maintenance | Beckmann<br>Fluke<br>AVO                    |
| 91 | Clip-On Ammeter for Operation<br>& Maintenance    | HCK, Germany<br>Kyoritsu Electrical , Japan |

**TECHNICAL SPECIFICATION**  
**FOR**  
**FIRE PROTECTION SYSTEM**

## **FIRE FIGHTING WORKS**

### **4.1 TECHNICAL SPECIFICATION FIRE PROTECTION SYSTEM**

#### **4.1.1 EQUIPMENT & SERVICES TO BE PROVIDED BY THE CONTRACTOR**

4.1.1.1 This specification covers the general requirements of design, preparation of detailed drawings, supply of material, manufacture, testing, inspection at BIDDER'S works, packing, forwarding, transportation, transit insurance, delivery at site, erection / installation, testing, commissioning at site and carrying out performance / acceptance tests of the equipment, materials and services as per enclosed data sheets and other documents for fire protection system (FPS).

4.1.1.2 The scope of work is as listed below.

Hydrant down comer system and Portable Fire Extinguishers shall be provided for various floors as per architectural floor plans.

4.1.1.3 Tentative layout drawings for fire hydrant down comer systems have been prepared by the CONSULTANT and enclosed with this enquiry. However the following shall be in the scope of bidder.

- a) Preparation and submission of detailed engineering drawings based on these specifications and latest base drawings.
- b) Performing and submitting Hydraulic calculations for the entire firefighting system .
- c) Drawing(s) showing layout of portable extinguishers along with necessary calculations.
- d) Preparation of any specific fabrication drawings, as required.
- e) Obtaining approval of the system from client's insurance company, local authority(ies) having jurisdiction (Fire officer, Factory Inspector, etc.) and approving agency appointed by client, including taking out necessary number of prints of drawings, submission to approving agency, co-coordinating site visits, making any minor modification in drawings for the purpose, etc.
- f) Prepare and submit as-built drawings as per Document and drawing submission & distribution schedule.
- g) The specification covers Details of pumping and pipe mains for the water based systems. Main fire water booster pumps with DG back up for hydrant down comer system.
- h) Piping inside and around pump house including suction and delivery piping, delivery header, recirculation piping.
- i) All the valves and specialties in above piping.
- j) Supporting arrangements needed (indoor & outdoor) for the piping, valves and instrumentation mentioned above.
- k) Hume pipes are as per standard practice to be provided wherever road crossings are shown.
- l) Wrapping & coating for underground piping.
- m) Excavation and back filling required for underground piping / outdoor supporting arrangement.



- n) Supply and application of painting for piping, fitting, valves, equipment, hose cabinets and structural steel and auxiliary steel for supports.
- o) It is not the intent to specify completely herein all details of design and construction of equipment or materials to be supplied or of services to be rendered.
- p) However, the equipment, materials and services shall conform in all respects to high standards of engineering design, workmanship and be capable of performing in continuous commercial operation in a manner acceptable to Client / Consultant who will interpret the meaning of drawings and specifications and shall have the power to reject any work or material which in his judgement are not in full accordance therewith.
- q) The equipment to be supplied and erected under this specification are detailed in BOQ and these shall be in accordance with Specification and data sheets and the relevant data sheet A of data sheets section.
- r) Any item which may not have been specifically mentioned herein but are needed to complete the equipment / system shall also be treated as included and the same shall also be furnished and erected, unless otherwise specifically excluded as indicated.

4.1.1.4 The Bidder's scope also includes the following:

- a) Auxiliary steel / supporting steel for supporting the equipment, piping as well as related drilling, welding work, painting of supports etc.
- b) All kinds of supports as necessary for piping.
- c) All anchor bolts, nuts, washers and inserts to be embedded in concrete for the equipment and piping.
- d) Construction of valve chamber in case of underground pipes.
- e) Hydro testing & Flushing (All necessary equipments, connections & valves shall be in CONTRACTOR'S scope.)

4.1.1.5 For routing piping, cabling etc. breaking / making of opening in wall, etc. shall be carried out by Contractor at no extra cost.

4.1.1.6 For pipes of fire water system that enter the buildings, the following will be in scope of contractor: If the pipe has to cross the metal cladding, then a correct size opening shall be made in the cladding and after the pipe is installed, the opening shall be sealed both on inside and outside by using proper sealants as approved by engineer-in-charge. Where pipe has to cross brick / block work wall, then a correct size opening shall be made in the wall, an appropriate sleeve installed and after the fire water pipe is installed, the opening between fire water pipe and sleeve shall be sealed both on inside and outside by using proper sealants as approved by engineer-in-charge.

## **4.1.2 SPECIFIC REQUIREMENTS / INSTRUCTION TO BIDDERS**

4.1.2.1 All equipment supplied shall have capacities not less than those specified in the data sheets and necessary test certificates shall be furnished in this regard. Approved

- makes and type of equipment/ components shall be supplied. The make, type reference of the equipment is subject to OWNER's approval.
- 4.1.2.2 Grouting of all equipment and supports, supply of grounding material such as cement, sand, necessary form work etc. is Bidder's responsibility.
- 4.1.2.3 No Separate payment will be made for necessary structural supports of piping.
- 4.1.2.4 The quantities of piping & valves, specialties etc. indicated in Schedule of quantities are indicative for the purpose of Bidder's guidance and shall not be binding to limit the scope of Contractor's work. In case there is any variation (plus or minus) in the quantities actually supplied and installed from the quoted quantities, the price of the same shall be adjusted based on the unit rates furnished by the BIDDER.
- 4.1.2.5 Bidder shall note that for piping, quantities of fittings like elbows, reducers, fabricated reducers / miters, compression fittings, flanges, nipples etc. are not defined. The price for supply, fabrication and erection of necessary fittings shall be included in the unit rates for respective pipe sizes. The rates for flanges, and hardware like bolts, nuts, washers and gaskets shall be included in prices quoted for pipes, equipment, valves and specialties as applicable.
- 4.1.2.6 No separate prices are called for painting. Price for supply and application of painting shall be included in the unit prices for piping, valves and equipment, structural steel work as applicable.
- 4.1.2.7 For pipes, measurement shall be corner to corner after deducting length of valves, specialties, in-line instruments.
- 4.1.2.8 All charges for inspection, testing, radiography, dye penetrate testing, flushing, cleaning, hydro/air testing, purging with inert gases, commissioning, including consumables required for same shall be included in the unit rate for erection of piping/valves/equipment.
- 4.1.2.9 Minor civil works like wall opening, chipping of foundation, grouting of foundations shall be carried out at no extra cost.
- 4.1.2.10 In addition to the scope mentioned in Clause 4.1.1.2 above, the CONTRACTOR shall supply and erect all required temporary pipes, fittings, flanges, valves and specialties and hangers and supports for testing and cleaning operations, as a part of the erection scope of contract for each of the systems listed above. The BIDDER shall consider this requirement while quoting unit prices for erection.
- 4.1.2.11 The construction of the fire protection system requires all CONTRACTORS to adhere to good daily housekeeping practices. During construction the CONTRACTOR shall every day, keep all work and storage areas used by them free from accumulation of waste materials. Scrap/ rubbish shall be removed from the site to the satisfaction of the client. The CONTRACTOR shall maintain a crew to carry out this function without any additional payment.
- 4.1.2.12 The contractor shall prepare and submit to the OWNER for approval, final piping bill of materials as actually erected for purpose of reconciliation.
- 4.1.2.13 The surplus material with the CONTRACTOR for all materials brought by him shall be taken back by the CONTRACTOR except surplus from those materials for which the OWNER has given, in writing, clearance for procurement.
- 4.1.2.14 All the pipes shall conform to the relevant piping standards. The pipes shall be joined using butt welding to ANSI B 16.25.
- 4.1.2.15 Slings/ wire ropes and other lifting, hoisting or pulling slings used for lifting various loads shall be invariably tested by a test load before carrying out actual erection.

4.1.2.16 The Vendor shall ensure that other utilities/items and aesthetics are not damaged or disturbed due to the installation activities.

4.1.2.17 Method of Testing System: The following tests shall be carried out for ensuring that the system and various components meet the system specifications

|                                      |                                                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Hydrant piping                       | <ul style="list-style-type: none"><li>• To withstand min. hydro-test at the pressure 1.5 times the max. working pressure i.e. <math>3.5 \times 1.5 = 5.25 \text{ kg/cm}^2\text{g}</math> for two hours (as per clause no. 7.5.6 of TAC manual)</li><li>• Leak test: system to be tested at maximum operating pressure for functional test at operating pressure for 2 hours after fixing all components.</li></ul> |
| Fire water pump                      | Shall be capable of delivering not less than 150 % of rated capacity at a head of not less than 65 % of the rated head                                                                                                                                                                                                                                                                                             |
| Wrapper coating on underground pipes | Holiday testing                                                                                                                                                                                                                                                                                                                                                                                                    |
| Other components                     | As per data sheet / requirements specified.                                                                                                                                                                                                                                                                                                                                                                        |

### 4.1.3 BIDDER'S PROPOSAL

4.1.3.1 To enable thorough and fast scrutiny of the BIDDER's proposal, BIDDER's are advised to respond all their technical data in the enquiry by clearly marking out their response, wherever they want to provide additional data and / or they deviate from the specified requirements. In case of full compliance, the enquiry specification and data sheets will remain unaltered. Each data sheets shall be certified by the BIDDER. This requirement is very important. Non compliance of this by the BIDDER may result in their bid being rejected.

4.1.3.2 Bidder shall ensure and cover all his eligible employees deputed on site under ESI act and Provident Fund Act. The contractor shall be liable to honour all labour laws as applicable in the state, also in respect of payment of minimum wages, payment of Provident Fund and ESI contribution, labour licence and any such acts which are not explicitly mentioned in the document but prevailing during the tenure of contract. The contractor should have his separate code number for compliance under ESI act and Provident Fund Act, so as to cover all his eligible employees under the act in the said code number. The contractor shall comply with the provisions of the act, on month to month basis and shall keep the appropriate record required under the act as well as shall submit the copy of compliance to the owner regularly.

4.1.3.3 BIDDER is advised to quote for the complete scope and partial response will not be entertained. In case of few items which do not directly fall under BIDDER's manufacturing range and / or not available from indigenous source, BIDDER should take the responsibility upon them to arrange to procure them and supply to ensure that their proposal is complete in all respects.

4.1.3.4 Ignorance of the site shall not be accepted as basis for any claim for compensation. The submission of the tender by the BIDDER will be construed as evidence that such

an examination was made and any later claims / disputes in regard to price quoted shall not be entertained or considered. Bidders may visit the site, if necessary, after getting permission of client.

#### **4.1.4 CODES AND STANDARDS**

- 4.1.4.1 All equipment, systems and works covered under this specification shall comply with all currently applicable statutes, regulations, standards and safety codes in the locality where the equipment will be installed. All equipment and systems shall comply in all respects with requirements of codes and standards as indicated in data sheets of this specification.
- 4.1.4.2 Other national standards established to be equivalent or superior to the codes and standards specified are also acceptable. The BIDDER shall furnish English translation of all standards specified in this specification.
- 4.1.4.3 In the event of any conflict between the codes and standards referred to in the specification and the requirements of this specification, the more stringent of this requirement shall govern.
- 4.1.4.4 All codes and standards referred to in this specification are latest editions of respective codes and standards.

#### **4.1.5 MAINTENANCE REQUIREMENTS**

- 4.1.5.1 In order to carry out preventive maintenance, it should be possible to readily disassemble, repair, and reassemble the equipment system in the shortest period and to attend to any defect by a minimum disassembly.
- 4.1.5.2 The BIDDER shall confirm that space shown for the equipment is adequate from point of view of access, easy maintenance and for day to day operation.
  - a) All system must have convenient maintenance characteristics including
  - b) Minimum disturbance to production during preventive maintenance.
  - c) Easy access to replacement part which can be installed by personnel with minimum skill.

#### **4.1.6 GUARANTEES AND PERFORMANCE REQUIREMENTS**

##### **4.1.6.1 GENERAL**

The fire protection system shall perform satisfactorily to meet the guarantee requirements specified to the entire satisfaction of the CLIENT / ENGINEER and statutory requirements.

##### **4.1.6.2 NOISE AND VIBRATION**

- a) Amplitude of vibration at bearing of rotating equipment shall conform to ISO: 10816-1.
- b) Vibration isolators of proven design shall be furnished by the BIDDER for preventing the transmission of vibration from the equipment (fire water pumps, etc.) to the other neighbouring equipment and structure.

#### **4.1.7 PAINTING**

- 4.1.7.1 Painting in the immediate vicinity of any electrical and rotating equipment and / or pipe in service shall not be performed without the prior written approval of the PURCHASER for the specific structure, equipment, or pipe to be painted.

- 4.1.7.2 The CONTRACTOR's scaffolding shall be erected, maintained and dismantled without damage to structures, machinery, equipment or obstruction to work of other CONTRACTORS.
- 4.1.7.3 All surfaces such as light gauge / glasses, required for clear visual observation shall be cleaned after paint application.
- 4.1.7.4 Special care shall be taken to avoid any paints from dropping on the machined moving parts of equipment, name plates or indicator dials of instruments and control valves. Prior to paint application or spraying paint removable adhesive tape shall be used to cover these.
- 4.1.7.5 On final completion of all work, the CONTRACTOR shall leave the entire premises within the site of his operation clean and free from all rubbish resulting from his painting operation and shall remove any paint or other blemishes caused by him on adjacent walls, windows, equipment and finished surface.
- 4.1.7.6 All piping shall be painted after hydro test only.
- 4.1.7.7 The iron and steel surfaces shall be thoroughly cleaned of all rust, scale, grease or oil by manual or power tools and then primer coat shall be applied.
- 4.1.7.8 The PURCHASER reserves the right to inspect the cleaning down and painting operations at any stage and if required by PURCHASER/ ENGINEER unsatisfactory surface preparation or paint application shall be emended at CONTRACTOR's expense.
- 4.1.7.9 On job site, no painting shall be carried out in a dust laden atmosphere or under unsuitable weather conditions viz. when raining or when metal surfaces are damp or when condensation is likely to affect the paint film before it is dry.
- 4.1.7.10 Surface preparation for underground and aboveground pipe shall be by thorough wire brushing and any additional cleaning as required.

#### **4.1.8 SYSTEM DESCRIPTION**

##### **4.1.8.1 Hydrant System**

Internal hydrants shall be provided for fighting fire within the buildings. The internal hydrants shall be provided in sufficient quantities such that no portion of the floor is more than 30m from an internal hydrant. For each internal hydrant a hose box with two nos. hoses, each of 15m length, and a hose reel of 30m length will be provided. The hose reel enables fighting low intensity fire at lesser water discharge. All the internal hydrants are placed on down comer which is connected to main hydrant line with isolation valve as shown in Fire Fighting - Schematic Diagram

##### **4.1.8.2 Fire Water Pump and Overhead Fire Water Tank**

- a) Fire Water Reservoir shall be of Polyethylene type construction
- b) Following Fire Water Pumps shall be provided at terrace level.

|  | <b>Name</b>                                                                      | <b>Quantity</b> | <b>Parameter</b>          |
|--|----------------------------------------------------------------------------------|-----------------|---------------------------|
|  | Electric Motor driven Booster Pump with DG back up - Horizontal Centrifugal type | 01              | 54 m3/hr @ 3.5 kg/cm2(g)* |

- \*Pump Power requirement shall be finalised by the contractor.

- A flow switch shall be provided on header for sensing flow of header when hydrant valve is operated.
- A pressure gauge shall be provided at discharge of pump.
- Pumps shall be capable of furnishing not less than 150% of rated capacity at a head of not less than 65% of the rated head. The shut-off head shall not exceed 120% of rated head.

#### 4.1.8.3 Portable Fire Extinguishers

Portable fire extinguishers for the proposed facilities are included in this package. Portable fire extinguishers shall be provided as per TAC. All the extinguishers should have ISI mark. Certificates to this effect shall be furnished by CONTRACTOR. Spare quantity of 10% of all types shall be provided.

### 4.1.9 SUMMARY OF DATA TO BE FURNISHED ALONG WITH BID

The BIDDER shall ensure the following documentation are prepared and submitted to PURCHASER along with the Bid:

#### 4.1.9.1 TECHNICAL BID

- All data sheet from of the tender specification shall be duly filled in.
- Performance curves/rating charts used for selection of equipment for all the systems shall be furnished along with the bid, with the duty points duly marked on them.
- All sheets of bill of quantities duly filled in, signed and stamped.
- Electrical load list indicating rating and quantity. Bidder is not allowed to change the motor rating in the event of order placement

#### 4.1.9.2 DETAILED ENGINEERING DOCUMENTS AFTER LOI

- The detailed engineering documents, hydrant piping layout drawings, Pump house Piping layout drawings etc., Piping calculation and datasheets for the execution of the job.
- Final data sheets.
- Any drawing detailed fabrication drawing which may be necessary for ring bending / fabrication etc.
- Any drawing which may be required to be modified / generated to suit the site condition / obtaining TAC approval.
- General arrangement drawings for hydrants, pumps, valves & specialties.

#### 4.1.9.3 FINAL DOCUMENTS

- Operation and maintenance manuals.
- Quality assurance documentation specific for the project.
- Final as built documentation folder containing all drawings and technical data sheets for future reference.

### 4.1.10 SCHEDULE OF INSPECTION / TESTING AT SITE (TO BE WITNESSED BY CLIENT)

- 4.1.10.1 The schedule of tests indicated below is indicative and not exhaustive. CONTRACTOR to carry out any other tests at site as per directions of CLIENT.

| Sl No. | Name of the System/Equipment | Tests to be carried out at site                               |
|--------|------------------------------|---------------------------------------------------------------|
| a)     | Pumps                        | Performance Test                                              |
| b)     | All rotating equipment       | Noise level and vibration level measurement                   |
| c)     | Power consumption            | For all equipment                                             |
| d)     | Pump control panel and logic | Operation test                                                |
| e)     | Piping (Sample)              | Hydrostatic leak test, Wrapper coating thickness, Radiography |
| f)     | Fire Hydrant (Sample)        | Operation test                                                |
| g)     | Fire Extinguisher            | Operation Test                                                |

## **4.2 FIRE PROTECTION SYSTEM-ELECTRICAL REQUIREMENTS**

### **4.2.1 SCOPE OF WORK**

- 4.2.1.1. Power and Control cabling from MCC to Fire Protection motors including cable carrier system.
- 4.2.1.2. Local Push button station
- 4.2.1.3. Earthing system above ground
- 4.2.1.4. Structural steel for supporting the panels, LPBS, Cable trays etc.

### **4.2.2 ELECTRICAL PANELS**

- 4.2.1.1. The Contractor's scope includes 1 No. MCC for Fire Protection System as per Appendix - 1 of this section.
- 4.2.1.2. 415 Volts, 50 Hz, TPN supply at the incomer of MCC will be made available by the purchaser. Further distribution of power and derivation of any other voltage shall be in Contractor's scope.
- 4.2.1.3. MCC incomer shall be suitable for termination of 1RX4CX50 sqmm, AL, XLPE The Contractor's scope includes 1 No. MCC for Fire Protection System as per Appendix - 1 of this section.
- 4.2.1.4. All potential free contacts (Feedback & command from PLC) shall be wired upto Marshalling compartment of MCC.

### **4.2.3 LOCAL PUSH BUTTON STATIONS (LPBS)**

- 4.2.3.1. LPBS for motors shall be provided by contractor. Necessary supporting structural steel for the same is in Contractor's scope.

- 4.2.3.2. LPBS shall be metal enclosed, weather proof, dust and vermin-proof, suitable for mounting on wall or structures. The enclosure shall be sheet steel, 2 mm thickness and shall have degree of protection not less than IP55. The enclosure shall be painted with one coat of epoxy primer and two coats of Epoxy Light Gray paint – 631 shade as per IS-5.
- 4.2.3.3. LPBS for shall be provided with 1no. recessed type start push button and 1No. Palm push, mushroom head type stop push button.
- 4.2.3.4. All push buttons shall be fitted with two (2) NO and two (2) NC contacts, rated for 10 A at 240V AC.
- 4.2.3.5. LPBS shall be suitable for bottom cable entry with stopping plugs.
- 4.2.3.6. Internal wiring shall be done with copper conductor HFFR wires shall be neatly done.
- 4.2.3.7. All spare contacts shall be wired upto terminal block.
- 4.2.3.8. Distance between cable gland plate and terminal block shall be minimum 75mm for ease of termination.
- 4.2.3.9. Two (2) Nos. earthing terminals shall be provided for external earthing. Earthing continuity bonds shall be provided.

#### **4.2.4 CABLING SYSTEM**

- 4.2.4.1. For MCC, Power supply will be made available at incomer with the help of 1.1 kV, XLPE Power Cables by others. Further Power and control cabling from MCC to motors shall be in the in scope of Contractor. Incoming Cable sizes will be indicated to successful bidder during execution based on total load of each plant.
- 4.2.4.2. FPS MCC shall be installed in Pump House.
- 4.2.4.3. MCC shall be provided with Top Cable entry. Anchor Fasteners, Bolts and other necessary supporting structure required for Panel installation shall be provided by bidder.
- 4.2.4.4. Contractor shall furnish Cabling layout & Cable Schedule for each Area.
- 4.2.4.5. For overhead cable trays, foundation (if required) for cable tray supporting structure will also be provided by Bidder.

LV Power Cables shall be 1.1 kV grade stranded copper conductor (up to 6 sq. mm) and stranded aluminium conductor (above 6 sq. mm) multi core, XLPE insulated, extruded PVC inner sheathed, GI wire / strip armoured, and extruded FRLS PVC outer sheathed, as per IS:7098 (Part- 1).

- 4.2.4.6. Control Cables shall be 1.1 kV grade stranded copper conductor (of minimum 2.5sq.mm.), XLPE insulated, extruded PVC inner sheathed, GI wire / strip armoured, extruded FRLS PVC outer sheathed as per IS:7098 (Part-1).
- 4.2.4.7. Minimum 1 core shall be kept spare in control cable.
- 4.2.4.8. Cable trays shall be Hot dipped Galvanised Iron (85 micron galvanising) with accessories such as coupling plates (with minimum 8 nos. holes), bends, tees, reducers, coupling nut-bolts etc. of following width. All the hardwares used for cable tray jointing, cable supporting & clamping shall be of SS304 material.



4.2.4.9. Nylon ties shall not be used for clamping cables, GI strip with SS304 hardware shall be used.

a) While sizing of Cables, Bidder shall consider voltage drop of 1.0% (max.) from MCC to Motor.

b) Cable sizes indicated in data sheets of low voltage induction motor are for General Guidelines only. Contractor shall provide cable sizing calculation based on design criteria mentioned above.

#### **4.2.5 EARTHING SYSTEM**

4.2.5.1. Earthing below ground shall be by others. Earthing above ground i.e. equipment earthing upto earthing bus shall be in the scope of Bidder.

4.2.5.2. Earthing shall be of GI.

4.2.5.3. Earthing connection at equipment shall be of bolted type.

4.2.5.4. 1 Run of 50x10mm GI Strip shall be provided by contractor along Cable Tray and shall be connected at suitable point to Earth Grid.

4.2.5.5. Bidder shall furnish the Earthing layout along with calculations (below as well as above ground).

#### **4.2.6 LV MOTORS**

4.2.6.1. Motors shall be suitable for 415 V, 3 phase, 50 Hz supply, squirrel cage type.

4.2.6.2. Motors shall be squirrel cage type, energy efficient (IE-3 class as per IS-12615, 2011) squirrel cage induction motors having TEFC, IP-55 enclosure (including terminal boxes and bearing housing) with Class-F insulation (and temperature rise limited to Class B) conforming to IS 325.

4.2.6.3. Motors shall be energy efficient (IE-3) type.

4.2.6.4. Motors will be with Direct On Line starter (DOL).

4.2.6.5. For other details, refer specification No. Data sheets A1 of low voltage induction motor.

4.2.6.6. Bidder shall follow below mentioned values of Efficiency as per ECBC.

| Motor Size (kW) | Efficiency (%) |        |
|-----------------|----------------|--------|
|                 | 2 Pole         | 4 Pole |

| Motor Size (kW) | Efficiency (%) |        |
|-----------------|----------------|--------|
|                 | 2 Pole         | 4 Pole |
| 1.1 (1.5 hp)    | 82.2           | 83.8   |
| 1.5 (2 hp)      | 84.1           | 85     |
| 2.2 (3 hp)      | 85.6           | 86.4   |
| 3.0 (4 hp)      | 86.7           | 87.4   |
| 4.0 (5.5 hp)    | 87.6           | 88.3   |
| 5.5 (7.5 hp)    | 88.5           | 89.2   |
| 7.5 (10 hp)     | 89.5           | 90.1   |
| 11.0 (15 hp)    | 90.6           | 91     |
| 15.0 (20 hp)    | 91.3           | 91.8   |
| 18.5 (25 hp)    | 91.8           | 92.2   |
| 22.0 (30 hp)    | 92.2           | 92.6   |
| 30.0 (40 hp)    | 92.9           | 93.2   |
| 37.0 (50 hp)    | 93.3           | 93.6   |
| 45.0 (60 hp)    | 93.7           | 93.9   |
| 55.0 (75 hp)    | 94             | 94.2   |
| 75.0 (100 hp)   | 94.6           | 94.7   |

4.2.6.7. For preferred makes refer Appendix-2 of this section.

#### **4.2.7 TERMINAL POINTS (BATTERY LIMIT)**

4.2.7.1. 415 Volts, 50 Hz, TPN supply at the incomer of MCC shall be made available by the purchaser. Further distribution of power and derivation of any other voltage shall be in Contractor's scope.

4.2.7.2. Termination of incomer and outgoing cables is in scope of contractor.

4.2.7.3. Earthing above ground shall be considered in contractor's scope as per clause no. 4.2.5

4.2.7.4. APPENDIX - 1

FPS MCC

| Sl. No. | Name of the equipment        | Feeder Type     | Motor Rating (kW) |
|---------|------------------------------|-----------------|-------------------|
| 1)      | Incomer                      | MCCB            | 63A               |
| 2)      | Fire Protection Booster Pump | DOL             | 10                |
| 3)      | Socket in MCC                | MCCB+63A Socket | 63A               |

**Note** – kW Rating & no. of feeders indicated here are preliminary & shall be confirmed by the bidder.

#### **4.3 FIRE PROTECTION SYSTEM-INSTRUMENTATION AND CONTROL (I&C) SYSTEM REQUIREMENTS**

##### **4.3.1 EQUIPMENT & SERVICES TO BE PROVIDED BY THE BIDDER**

4.3.1.1. This specification covers the general requirements for design, preparation of detailed drawings, supply of material, manufacture, testing, inspection at BIDDER'S works, packing, forwarding, transportation, transit insurance, delivery at site, erection/installation, testing, commissioning at site and carrying out performance / acceptance tests of the Instrumentation & Control System for Fire Protection System as per specifications in this section, enclosed data sheets, drawings and other documents.

4.3.1.2. The following shall be in the scope of the BIDDER:

4.3.1.3. Supply, erection & commissioning of instruments as per P&ID for following systems:

a) Hydrant System

b) The instruments shown on P & ID are of minimum requirements. However BIDDER shall provide all instruments required for proper functioning of the systems.

4.3.1.4. Supply, erection & testing, commissioning of Fire Protection Panel and completely wired flow switches to Fire Protection Panel. Panel shall be located in Pump house along with all required accessories as per specification. The cabling required up to Fire Protection panel from instruments is in the BIDDER's scope

4.3.1.5. Contractor shall supply & lay the following cables:

- a) All cables between the field instruments, junction boxes, control panel, MCC & any other equipment with termination & cable gland at both ends along with all cable laying accessories.
  - b) Power supply cables as required for the instruments & panels. 230 V AC power supply shall be made available by Bidder. Bidder shall supply, lay & terminate the power supply cables from that point to the respective system panels for I&C system. Power supply cables for further distribution of power supply within the panel & from panel to field shall be provided by Bidder.
  - c) Cable trays / GI /PVC conduits for all the above cabling. The cable trays in the outdoor areas shall be provided with covers.
- 4.3.1.6. All erection hardware including structural steel for erection of all field instruments, cable trays/ GI / PVAC conduits, panels etc. shall be provided by the BIDDER. BIDDER shall supply all necessary erection hardware required for proper installation of the instruments
- 4.3.1.7. Earthing for all field instruments, panels, PDBs etc. shall be in the scope of contractor.
- 4.3.1.8. Bidder's scope of work shall include complete loop checking of all measurement & command chains.
- 4.3.1.9. Integration & commissioning of the complete system.
- 4.3.1.10. Minor civil work such as wall opening & sealing it back after laying of cable trays / conduits, pedestals for stanchions, grouting, anchor fasteners for supporting etc. are included in scope of bidder
- 4.3.1.11. Site Acceptance tests (SAT) to meet the design specifications & functional requirements as specified.
- 4.3.1.12. Assumptions to cover lack of information are not allowed. Bidder is obliged to obtain reliable information from PURCHASER/ CONSULTANT.
- 4.3.1.13. The compliance with this specification does not relieve the Bidder from his responsibility towards contractual obligations with regard to completeness, satisfactory operation and easy maintenance of the unit
- 4.3.1.14. Supply & erection of GI / PVC conduits as required for cabling.
- 4.3.1.15. The BIDDER's scope of work shall include trial runs, start up, commissioning and process trials of systems covered in this specification.

#### **4.3.2 DESIGN CRITERIA**

- 4.3.2.1. All instruments shall be suitable for use in hot, humid, tropical & dusty climate.
- 4.3.2.2. Field mounted electrical and electronic instruments shall be weatherproof to IP-65. All instruments of submersible type if any shall be protected to IP-68.
- 4.3.2.3. Wherever the service is hazardous, the field transmitters shall be intrinsically safe. For switches, solenoid valve & junction boxes suitable ex-proof enclosure shall be

provided in hazardous areas. For intrinsically safe instruments suitable barriers shall be provided in relay control cabinet by BIDDER.

- 4.3.2.4. All panels, control desks & enclosures shall comply with the requirements of protection classes as indicated below

|                                      |       |
|--------------------------------------|-------|
| In-door Air-conditioned (A.C.) areas | IP 20 |
| In-door Non A.C. areas               | IP 42 |
| Outdoor areas                        | IP 65 |

- 4.3.2.5. The field junction boxes for indoor application with IP55 and outdoor JB with IP65 shall be provided.
- 4.3.2.6. All wetted parts shall be of minimum SS 316. However, based on the process application, suitable superior material shall be provided to match the process.
- 4.3.2.7. All instruments and control devices located on control panels shall be of miniaturised design, suitable for modular flush mounting on control panels with front draw out facility and flexible plug-in connections at the rear.
- 4.3.2.8. The I&C system shall be designed by selecting high-grade components of proven quality and proper design of system electronics. The system shall be highly reliable with high-integrity and high MTBF system.
- 4.3.2.9. All instruments, control systems and accessories furnished under this specification shall be from the latest proven product range of a qualified manufacturer whose successful performance has been established by a considerable record of satisfactory operation in utility power stations.
- 4.3.2.10. The normal working range of all indicating instruments shall be between 30% and 80% of the full range.
- 4.3.2.11. For pressure switches and temperature switches, the set points shall fall within 30% to 70% of the scale range selected.
- 4.3.2.12. The performance of all instruments shall be unaffected for the variation in voltage and frequency of the power supply.
- 4.3.2.13. Provision shall be made for external adjustment of span and zero for all instruments for calibration.
- 4.3.2.14. All the hardware/software shall be latest and field proven as available in the market.
- 4.3.2.15. All requirements of auxiliary equipment for instruments and control devices including thermo wells, resistance elements and transmitters, special wiring and piping accessories, air filter and pressure regulators, condensation pots and all other special devices required for installation in instrument piping and wiring system shall be furnished complete as required for each individual element, instrument or system unless specifically stated otherwise in this specification.
- 4.3.2.16. Tag numbering philosophy would be uniform for the entire plant. There would be a single, unique tag for a given equipment / signal.
- 4.3.2.17. All parts subject to high pressure, temperature or other severe duty shall be of materials and construction suitable for the service conditions and long operating life.

- 4.3.2.18. Components of instruments, control devices, accessories, piping etc. which contact with steam, condensate or boiler feed water shall be manufactured from copper free materials which do not react with media at operating parameters.
- 4.3.2.19. Instruments for location in outdoor/indoor/air-conditioned areas shall be designed to suit the environmental conditions and shall be suitable for continuous operation in the operating environment without any loss of function or departure from the specification requirements covered under this specification.
- 4.3.2.20. The power supply for the instrumentation & control system shall be 24 V DC, unless otherwise specified.
- 4.3.2.21. IBR certification wherever applicable shall be provided with the instruments.
- 4.3.2.22. For interlock and protections dedicated switches shall be provided. All trip condition shall be preceded by pre warning.
- 4.3.2.23. 230 V AC power distribution board (PDB) / UPS distribution board in the control rooms.
- 4.3.2.24. Earthing pits.

#### **4.3.3 SPECIFIC REQUIREMENTS / INSTRUCTION TO BIDDERS**

- 4.3.3.1. This is a unit rate contract. Price shall be quoted as per the specifications in section. The quantities of cables, conduits, trays etc. is estimated based on the Plot plan drawing. Bidders are advised to go through the tender document carefully and suggested that clarifications, if any, are obtained from Department before submission of their quotation.
- 4.3.3.2. The construction of this facility requires that, all BIDDERS adhere to good daily housekeeping practices. During construction the BIDDER shall every day, keep all work and storage areas used by them free from accumulation of waste materials. Scrap / rubbish shall be removed from the site to the satisfaction of the PURCHASER. The BIDDER shall maintain a crew to carry out this function without any additional payment.
- 4.3.3.3. It is not the intent to specify completely herein all details of design and construction of equipment or materials to be supplied or of services to be rendered.
- 4.3.3.4. However, the equipment, materials and services shall conform in all respects to high standards of engineering design, workmanship and be capable of performing in continuous commercial operation in a manner acceptable to PURCHASER who will interpret the meaning of drawings and specifications and shall have the power to reject any work or material which in his judgement are not in full accordance therewith.
- 4.3.3.5. Any item which may not have been specifically mentioned herein but are needed to complete the equipment / system shall also be treated as included and the same shall also be furnished and erected, unless otherwise specifically excluded as indicated.
- 4.3.3.6. To enable thorough and fast scrutiny of the BIDDER's offer, BIDDERS are advised to respond all their technical data in the enquiry by clearly marking out their response, wherever they want to provide additional data and / or they deviate from the specified requirements. In case of full compliance, the enquiry specification and data sheets will remain unaltered. Each data sheet & write up in specification shall be

signed and stamped by the BIDDER. This requirement is very important. Non compliance of this by the BIDDER may result in their bid being rejected.

- 4.3.3.7. BIDDER is advised to quote for the complete scope and partial response will not be entertained. In case of few items which do not directly fall under BIDDER's manufacturing range and / or not available from indigenous source, BIDDER should take the responsibility upon themselves to arrange to procure them and supply to ensure that their offer is complete in all respects.

#### **4.3.4 CODES AND STANDARDS**

- 4.3.4.1. All equipment, systems and works covered under this specification shall comply with all currently applicable statutes, regulations, standards and safety codes in the locality where the equipment will be installed.
- 4.3.4.2. In particular, the following standards are applicable (latest editions)

|                                                              |                                                                                              |
|--------------------------------------------------------------|----------------------------------------------------------------------------------------------|
| <b>ANSI :American National Standards Institute</b>           |                                                                                              |
| 1.1.1.                                                       | Control Valve Seat Leakage classification.                                                   |
| <b>ASME : American Society for Mechanical Engineers</b>      |                                                                                              |
| <b>BS : British Standards</b>                                |                                                                                              |
| BS-5308 Part-I                                               | Specification for Polyethylene insulated cables.                                             |
| <b>DIN-43760</b>                                             | Temperature Vs Resistance curves for RTD.                                                    |
| <b>IEC : International Electro technical Commission</b>      |                                                                                              |
| IEC 79                                                       | Electrical Apparatus for Explosive Gas atmosphere                                            |
| IEC-332                                                      | Test on bunched wires or cables.                                                             |
| IEC 529                                                      | Classification of degree of protection provided by enclosures                                |
| IEC 584-2                                                    | Thermocouple Tolerances                                                                      |
| IEC 751                                                      | Industrial RTD Sensors.                                                                      |
| IEC 801                                                      | Electromagnetic compatibility for industrial for industrial Process measurement and control. |
| <b>ISA : Instrument Society of America</b>                   |                                                                                              |
| S-5.2                                                        | Binary Logic Diagrams for Process Operations.                                                |
| S-7.3                                                        | Quality standard for instrument air                                                          |
| S-75.01                                                      | Flow equations for Control Valve Sizing                                                      |
| <b>ISO : International Organization for Standardization.</b> |                                                                                              |
| ISO-5167                                                     | Measurement Of fluid flow in closed conduits                                                 |
| <b>NEC : National Electric Code</b>                          |                                                                                              |
| <b>NEMA : National Electrical Manufacturer's Association</b> |                                                                                              |
| ICS-6                                                        | Enclosures for industrial control system                                                     |
| IS:13947. Part-1                                             | Low voltage switchgear and control gear : General rules                                      |



|          |                        |
|----------|------------------------|
| IEC 326. | Printed Circuit Boards |
|----------|------------------------|

4.3.4.3. Other national standards established to be equivalent or superior to the codes and standards specified are also acceptable. The BIDDER shall furnish English translation of all those standards apart from those mentioned in this specification.

4.3.4.4. In the event of any conflict between the codes and standards referred to in the specification and the requirements of this specification, the more stringent of these requirements shall govern.

4.3.4.5. Unless indicated otherwise, all codes and standards referred to in this enquiry specification shall be understood to be the latest version on the date of offer made by the Bidder.

#### **4.3.5 MAINTENANCE REQUIREMENTS**

4.3.5.1. In order to carry out preventive maintenance, it should be possible to readily disassemble, repair, reassemble the I&C equipment in the shortest period and to attend to any defect by a minimum disassembly.

4.3.5.2. All system must have convenient maintenance characteristics including :

- a) Minimum disturbance to production during preventive maintenance.
- b) Easy access to replacement part which can be installed by personnel with minimum skill.

#### **4.3.6 I&C SYSTEM CONFIGURATION**

##### **4.3.6.1. HYDRANT SYSTEM**

- a) Instruments shall be provided for the system as per P&ID & data sheets in specification.
- b) Alarm from these instruments shall be annunciate in window Annunciator located in Fire Fighting Panel.

##### **4.3.6.2. JUNCTION BOX**

- a) All the cables shall be wired to Fire Fighting Panel through Junction Boxes.

##### **4.3.6.3. FIRE PROTECTION SYSTEM CONTROL PANEL**

- a) A relay based Fire Protection Panel shall be provided for local operation and monitoring at fire water pump house. The panel shall house the logic of operation and Annunciation of Fire water pumps. Auto manual switches and push buttons will be provided on panel for local operation of pumps. The annunciator shall be microprocessor based, split type with alarm windows mounted on front door and electronic components inside the panel. Potential free contacts shall be wired up to the terminals inside fire protection panel for each of the alarm. The control supply for the panel shall be 24V DC. The panel will be provided with 230V AC

from reliable supply from UPS, AC to DC converter in redundant mode will be provided in the panel.

4.3.6.4. The operation in auto & manual modes shall be as below:

a) Auto mode

- The fire water booster pumps shall start at the flow in the hydrant discharge line as given in P&ID. DG back shall be provided If the fire water booster pump fails to start due to power failure .
- The Electrical driven fire water booster pumps shall be stopped manually by pushbuttons on the MCC even in the auto mode.
- Alarms shall be provided for indication of running, trip & failed to operate status of fire water booster pump (main & DG Back up) and trip & failed to operate status of pump. The potential free contact from flow switches provided in the discharge of each pump shall be used for indication of 'Pump running.
- Provision for Potential Free contacts shall be provided in fire Protection Panel for wiring the Pump trip signal of Fire water Pumps to DDC (If any).

b) Manual mode

- In the manual mode, the fire water booster pump shall be started/stopped using pushbuttons provided on the MCC.

4.3.6.5. The control voltage shall be 24 VDC. The power supply (230 V AC) shall be made available in the panel by the bidder from the MCC.

4.3.6.6. The cables to be considered are armored cables.

4.3.6.7. Cables inside Pump house shall be laid over perforated trays.

#### **4.3.7 SPECIFICATION FOR THE ALL THE FIELD INSTRUMENTS SHALL BE AS GIVEN BELOW**

4.3.7.1. Pressure Gauges

| Sr.No | Description  |   | Employer's requirement              |
|-------|--------------|---|-------------------------------------|
| 1     | Type         | : | Direct Reading                      |
| 2     | Casing       | : | SS 304                              |
| 3     | Glass        | : | Toughened borosilicate shatterproof |
| 4     | Dial size    | : | 150 mm                              |
| 5     | Wetted Parts | : | SS 316                              |

|    |                         |   |                                                                                                                                                                                                                                                                                                                                                                                                                  |
|----|-------------------------|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | (including accessories) |   |                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 6  | 2-valve manifold        | : | SS 316                                                                                                                                                                                                                                                                                                                                                                                                           |
| 7  | Diaphragm seal          | : | SS 316 (with suitable coating of material if required)                                                                                                                                                                                                                                                                                                                                                           |
| 8  | Pointer                 | : | Aluminium                                                                                                                                                                                                                                                                                                                                                                                                        |
| 9  | Movement & socket       | : | SS 316                                                                                                                                                                                                                                                                                                                                                                                                           |
| 10 | Accuracy                | : | $\pm 1.0$ % of full scale                                                                                                                                                                                                                                                                                                                                                                                        |
| 11 | Process Connection      | : | Bidder to State                                                                                                                                                                                                                                                                                                                                                                                                  |
| 12 | Over range protection   | : | 25% above maximum pressure                                                                                                                                                                                                                                                                                                                                                                                       |
| 13 | Accessories             | : | <ul style="list-style-type: none"> <li>• Syphon for services above 75°C</li> <li>• Snubber for pump discharge applications</li> <li>• Chemical diaphragm for corrosive fluid lines (acid, alkali etc.), in discharge of sludge transfer pumps &amp; in oil.</li> <li>• 2-valve manifold (2-valve manifold &amp; snubber is not be required for diaphragm seal application.)</li> <li>• SS name plate.</li> </ul> |

#### 4.3.7.2. Junction Boxes

| Sr. No. | Description  | Qty. | Employer's requirement |  |
|---------|--------------|------|------------------------|--|
|         |              |      |                        |  |
|         | GENERAL      |      |                        |  |
| 1.      | Manufacturer |      |                        |  |
| 2.      | Model No.    |      |                        |  |

| Sr. No. | Description              | Qty. | Employer's requirement                     |  |
|---------|--------------------------|------|--------------------------------------------|--|
|         | FEATURE                  |      |                                            |  |
| 3.      | Mounting                 |      | Wall/ column                               |  |
| 4.      | No. of terminals         |      | 32 (2x16)                                  |  |
| 5.      | Terminal type            |      | Screwed                                    |  |
| 6.      | Terminal size            |      | Suitable for 2.5 sq. mm. wire              |  |
| 7.      | Mounting plate           |      | Required                                   |  |
| 8.      | Cable entry              |      | Bottom                                     |  |
| 9.      | Gland plate              |      | Removable                                  |  |
| 10.     | Door                     |      | Single lockable door with gasket           |  |
| 11.     | Lock & key               |      | Required                                   |  |
| 12.     | Sheet thickness          |      | 3 mm                                       |  |
| 13.     | Painting                 |      | Inside: glossy white;<br>Outside: RAL 7032 |  |
| 14.     | Protection class         |      | Weather proof to IP 65                     |  |
|         | MATERIAL OF CONSTRUCTION |      |                                            |  |
| 15.     | Enclosure                |      | MS with epoxy painting                     |  |
| 16.     | Gasket                   |      | Neoprene                                   |  |
| 17.     | Cable entry sealing      |      | Fire proof compound                        |  |
| 18.     | Name plate/ metal tag    |      | Fixed SS304                                |  |
| 19.     | Installation hardware    |      | Required                                   |  |

#### 4.3.7.3. Power Supply

230 V AC power supply for the I&C system shall be available from UPS. All field instruments/ valves shall operate on 24 V DC power supply. Two-wire field instruments shall be system powered (24 VDC) from the control system. The distribution of power in field, if required for the instruments/valves, shall be through a designated field mounted junction box (with fused terminals).

#### 4.3.7.4. Instrumentation and Control Cables

- (a) All instrument cables for control and indication shall be flame retardant, Low smoke (FRLS) and tested in accordance with IEC 60332 Part 3 and Cable design shall be as per EN 50288-7.
- (b) The basic specification of the conventional cables shall be as follows:

|                    |   |                                                                                                                                                                                                      |
|--------------------|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Conductor material | - | Tinned copper, with minimum 7 strands                                                                                                                                                                |
| Conductor size     | - | 1.0 mm <sup>2</sup> for signal cable as minimum.<br>1.5 mm <sup>2</sup> for control cable as minimum<br>1.5 mm <sup>2</sup> for power cables as minimum<br>Other sizes based on the load requirement |
| Core / Pair        | - | 1 Pair, 2 Pair, 6 Pair, 12 Pair for signal<br>1 Triad, 8 Triad for RTD signals<br>2 Cores, 3 Cores (Power), 6 Cores, 12 Cores, 24 Cores, 36 Cores for control cable                                  |
| Insulation         | - | Polyethylene                                                                                                                                                                                         |
| Voltage grade      | - | 660 / 1100 V                                                                                                                                                                                         |
| Inner sheath       | - | PVC, black                                                                                                                                                                                           |
| Screening          | - | Aluminium Mylar tape                                                                                                                                                                                 |
| Coverage           | - | 100%, Overlap 25%                                                                                                                                                                                    |
| Drain wire         | - | Copper, 0.5 mm <sup>2</sup>                                                                                                                                                                          |
| Armouring/ Braided | - | GI wire /strips                                                                                                                                                                                      |
| Outer sheath       | - | FRLS PVC for 90°C<br>Blue (IS), Grey (Non IS / Exd), Black (Power)                                                                                                                                   |

(c) Cables for earthing

1100 V, FRLS, PVC insulated, Green color, stranded copper cable.

(d) All multipair & multicore cables shall be provided with 20% (of used pairs/cores) spare pairs & cores for future use.

#### 4.3.7.5. CABLE TRAYS AND CABLE GLANDS

(a) Cables Glands

Cable entries in field instruments & panel shall be using cable glands. The cable glands shall be of double compression type with high quality neoprene gaskets. Cable glands shall be of brass with nickel plating.

(b) Cable trays

Cable trays shall be perforated of hot dipped galvanized steel. I&C cables (24 V DC) and power cables (230 V AC) shall be routed through different cable trays to avoid electromagnetic interference. Minimum 300 mm distance shall be maintained between I&C cables /24 V DC power supply cables and 415 V AC/ 230 V AC power cables. The thickness of the cable trays shall be 2mm while that of the tray covers shall be 1.5mm

#### 4.3.7.6. FIRE PROOF SEALING OF CABLE PENETRATION

Cables/ cable tray openings in walls and floors or through pipe sleeves from one area to another or one elevation to another will be sealed by a fireproof sealing compound. The fire-proof sealing compound will effectively prevent the spread of fire from the flaming to non-flaming side, in the event of fire.

#### 4.3.7.7. WIRING

All inter cubical and internal wiring for all panels/ junction boxes/ power distribution boards shall be carried out with 1100V grade, stranded tinned copper conductors with insulation. The minimum size of the stranded copper conductor used for the panel wiring shall be 1.0 mm<sup>2</sup> for analog signals and 1.5 mm<sup>2</sup> for 24 V DC control commands. For power supply, the conductor size shall be provided as per the load rating (min. 2.5 sq. mm for 230 V AC and 1.5 sq.mm. for 24 V DC). Control & Power wiring shall be segregated and routed in PVC troughs. Different colour wires shall be used for different voltages.

Engraved core identification plastic ferrules, marked to correspond with the panel-wiring diagram shall be fitted at both ends of each wire. Cross ferruling shall be done.

For termination of cables emanating/entering the panels & junction boxes etc. Terminal blocks shall be provided. For 24 V DC power distribution to panels/

junction boxes, terminal blocks shall be provided for cables emanating/entering the panels.

For 230 V AC PDBs & sub-PDBs, normal terminal blocks are acceptable.

All spare contacts and spare terminals of the panel mounted equipment and devices shall be wired to the terminal strips.

#### 4.3.7.8. CABLE TERMINATIONS

Suitable termination accessories shall be provided for terminating on the terminal strips in junction boxes, consoles, panels, power distribution boards etc. All necessary cable terminating accessories such as removable gland plates, compression glands, supporting clamps and brackets, wiring troughs and gutters, etc. shall be included in the BIDDER's scope of supply. Cable entry into the junction boxes, consoles, panels, power distribution boards etc. shall be using double compression Nickel plated brass.

Disconnect type terminals with fuses with visual indication of fuse down shall be provided at each digital input & output terminal.

Disconnect type terminals shall be provided for all inputs/ outputs to isolate field input and output for maintenance purpose.

#### 4.3.7.9. RELAYS

All industrial relays used shall have 2 NO + 2 NC contacts.

Whenever relays are used (if applicable) to interface process input/outputs, 20% additional relays shall be provided. In addition, 20% spare space shall be provided in panels/junction box to install 20% additional relays or other items in future.

#### 4.3.7.10. LABELS

All front mounted equipment, as well as equipment mounted inside the panels/junction boxes shall be provided with individual labels with equipment designation engraved. These shall be phenolic overlays (1.6 mm thick) with black background and white lettering and shall be fixed to the panel by stainless steel screws (counter sunk). The panels/junction boxes shall also be provided at the top with a label engraved with the designation. Lettering for panel/control desk/junction box designation shall be 6 mm. The minimum lettering size for instrument/device labels shall be 3mm. The lettering on the labels shall be subject to PURCHASER'S approval. Labels of internally mounted equipment shall be clearly visible.

#### 4.3.7.11. EARTHING

Each panel, junction box & power distribution board shall be provided with a safety ground bus & system ground bus made of copper securely fixed along the inside base of the panels. These buses shall be typically of 25 mm wide and 6 mm thick of copper. The safety ground bus shall be properly secured to the plant safety earthing. All metallic cases/frames of relays, instruments, other panel mounted equipment shall be connected to the safety ground bus and shields & drain wires of signal/control cables shall be connected to the system ground bus by independent copper wires of not less than 2.5 sq. mm. The system ground bus shall be electrically isolated from AC mains earthing bus. The insulation colour code for earthing wires shall be green with yellow bands.

#### **4.3.8 TENDER EVALUATION**

The BIDDER shall comply with all systems / parameters wherever they are specified in data sheets of specification. No credit will be given during tender evaluation, if parameters better than those specified are offered by the BIDDER.

#### **4.3.9 SUMMARY OF DATA TO BE FURNISHED ALONG WITH BID AND AFTER PLACEMENT OF ORDER**

The BIDDER shall ensure the following documentation are prepared and submitted to PURCHASER for his review / record.

##### **4.3.9.1. Technical Bid**

- a) Specification, each data sheet & write-up in specification shall be signed / filled and stamped by the BIDDER indicating compliance to the specifications.
- b) The following drawings/ documents shall be submitted:
  - Dimensional Drawings of Junction boxes, Window annunciator panel along with BOQ.
  - Instrument list indicating, Make, Model No., Service, Type of Instrument.
  - Engineering activity and manufacturing schedule giving activity wise breakup to meet the delivery schedule.

##### **4.3.9.2. Final Documents**



- a) Operation and maintenance manuals.
- b) Quality assurance documentation specific for the project.
- c) Final as built documentation folder containing all items for future reference.

#### **4.3.10 DATA AND DRAWINGS BY BIDDER (AFTER THE AWARD OF CONTRACT)**

The BIDDER shall submit the following drawings / documents after award of contract. BIDDER shall adhere to the delivery schedule as submitted along with the BID. BIDDER shall also refer to data sheets in Data sheets for list of deliverables to be submitted for various instruments/ panels.

| <u>Sl. No.</u> | <u>Details</u>                                                                                                                                                                                                                                                                                                                                                       |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| (a)            | PERT/Bar chart for the design, manufacturing, erection, commissioning, trial operation and performance testing of the system offered.                                                                                                                                                                                                                                |
| (b)            | System Functional Write-up.                                                                                                                                                                                                                                                                                                                                          |
| (c)            | Unpriced purchase order copy for various bought out /sub contracted equipment / services.                                                                                                                                                                                                                                                                            |
| (d)            | Letter from Sub BIDDER(s) showing order acceptance and adherence to project schedule.                                                                                                                                                                                                                                                                                |
| (e)            | Junction Box list with data sheets, Internal G.A. drawings, internal wiring drawings & BOQ, quantity & model no. of all instruments/ items mounted in the junction boxes.<br><br>Window annunciator panel list with data sheets, Internal G.A. drawings, internal wiring drawings & BOQ, quantity & model no. of all instruments/ items mounted in the junction box. |
| (f)            | Heat load and Power consumption for all I&C loads.                                                                                                                                                                                                                                                                                                                   |
| (g)            | Instrument list with tag numbers, Makes and Model nos., Service, Type of instrument.                                                                                                                                                                                                                                                                                 |
| (h)            | Data sheets & catalogues for all instruments (including panel mounted instruments), installation sketches along with erection bill of quantities for all field mounted instruments and loop diagrams.                                                                                                                                                                |
| (a)            | Data Sheets & catalogues for I&C cables & power cables.                                                                                                                                                                                                                                                                                                              |

| <u>Sl. No.</u> | <u>Details</u>                                                                                         |
|----------------|--------------------------------------------------------------------------------------------------------|
| (b)            | QAPs for all items like field & panel mounted instruments, valves, panels, junction boxes, cables etc. |
| (c)            | Earthing diagrams.                                                                                     |
| (d)            | Cable Schedules and Interconnection cable schedules.                                                   |
| (e)            | ‘As Built’ drawings.                                                                                   |
| (f)            | Instruction manual for installation and start-up.                                                      |
| (g)            | System operation and maintenance manual.                                                               |

### **4.3.11 TESTING, INSTALLATION, COMMISSIONING AND ACCEPTANCE**

#### **4.3.11.1. General**

On the basis of guidelines specified in this specification Bidder shall submit their own testing, installation, commissioning and acceptance procedure. The procedure shall include purpose of test, test definition, results expected and acceptance criteria.

#### **4.3.11.2. Site Acceptance Tests (SAT)**

Full integrated site acceptance test shall be performed before hand over of total system to the PURCHASER. The test shall demonstrate functionality of the entire I&C system supplied & erected by the BIDDER. The BIDDER shall provide all personnel, test facilities, equipment and tools etc. for the same. All test instruments shall have calibration certificates from approved test house, valid for minimum 6 months. A test procedure is required for approval 2 weeks prior to the schedule start.

#### **4.3.11.3. Instrumentation Testing Requirements**

- a) Tests on cable
  - Check details are in accordance with the specification.
  - Check for physical damage.
  - Megger test between each core and armour/sheath.
  - Continuity check including screen continuity
  - Terminations in the Panels/ junction boxes/ battery with battery charger supplied & erected by the BIDDER.
- b) It shall be ensured that erection of junction boxes are as per approved layout drawings. Checking for tagging/identifications of all the panels /junction boxes shall be done. Checks for continuity and termination of all power signal & control cables as per approved drawings shall be carried out. All the panels

& junction boxes supplied & erected by the BIDDER shall be checked at site by carrying out the following tests:

- Visual & Mechanical testing.
- Power up tests on battery with battery charger, checking input & output voltages
- Checks on incoming voltage and power distribution in the various panels & junction boxes by switching on MCCBs/MCBs one after the other.
- Power up tests on the DC power supply system, checking input & output voltage
- Tests on electrical installation
- Checking of closing, tripping, supervision and interlocking of control devices.
- Checking operation of all alarm circuits.

c) Instrument Calibration.

- The services of factory trained instrumentation technicians, tools and equipment for field calibration of each instrument to its specified accuracy in accordance with the manufacturer's specifications and instructions for calibration shall be provided.
- Each instrument shall be calibrated at 0 percent, 25 percent, 50 percent, 75 percent and 100 percent of span using test instruments to simulate inputs and read outputs that are rated to an accuracy of at least 4 times greater than the specified accuracy of the instrument being calibrated.
- Such test instruments shall have accuracies traceable to the National Bureau of Standards as applicable.
- A written report on each instrument in the format required by the Purchaser shall be provided to the Purchaser certifying that it has been calibrated to its published specified accuracy. This report shall include a listing of the published specified accuracy and permissible tolerance at each point of calibration. The report shall be certified by the Engineer.

d) System Validation

- The services of factory trained and field experienced instrumentation engineer(s) shall be provided to validate each system and verify that it is operational and performing its intended functions as per specifications.

- Each system shall be validated by simulating inputs at the first element in loop (i.e. sensor) of 10 %, 50 % and 90 % of span, or on/off and verifying loop output devices (i.e. indicator, alarm etc.).
- During system validation, provisional settings shall be made on levels, pressure, temperature, alarms etc.
- Correct operation of controllers shall be verified by observing that the final control element moves in the proper direction to correct the process variable as compared to the set point.
- All logic sequences shall be verified to operate in accordance with the specifications.
- All defects and malfunctions disclosed by tests shall be corrected immediately. New parts and materials shall be used as required and approved and tests shall be repeated.
- A report certifying completion of validation of each instrument system indicating the errors observed during the validation and any provisional settings made to devices shall be provided. The report shall be made in the format required by the Purchaser and shall be certified by the Purchaser when he approves it.

e) Final Operational Testing and Acceptance.

- Upon completion of instrument calibration and system validation, all systems shall be tested under process conditions.
- The testing shall include, but not limited to all specified operational modes, taking process variables to their limits (simulated or process) to verify all alarms, failures, interlocks and operational interlocks between systems and/or mechanical equipment.
- Any defects or malfunctions shall be immediately corrected using approved methods and materials and the tests shall then be repeated.
- Upon completion of final operational testing, a report shall be submitted, indicating that the total control system provided meets all the functional requirements specified herein. This report shall be made in the format required by the Purchaser. The Purchaser shall certify this report when he approves it and it shall constitute final acceptance of the control system.

#### 4.3.11.4. Commissioning

- a) Commissioning Procedure shall be carried out in a methodical sequence as follows

- Start-up,
  - Initial running,
  - Operability adjustment,
  - Stable operation
  - Final adjustment
- b) The BIDDER shall check the operating conditions of the Plant by constantly monitoring operating data.
  - c) The BIDDER shall specify for each discrete part of the Plant the operational data to be recorded and the manner in which the data is to be taken.
  - d) All the operating data shall be recorded, evaluated and submitted to the Purchaser.

#### **4.3.12 SPARE PHILOSOPHY**

4.3.12.1. Spare shall include spare parts, special tools and tackles, including tool box, as required for pre-commissioning & commissioning, start-up and interim operation, day-to-day maintenance, any premature failures for the facilities and first ~~one~~ years operation.

- a) Start-up and Commissioning spares
- b) Mandatory spares
- c) One-year operational spares
- d) Special tools and equipments (if required)

4.3.12.2. Following spare philosophy shall be followed for field instrument:

- a) Local gauges, instruments, switches, lamps etc. – 10% of each type/model or 1 No. minimum whichever is higher
- b) All electronic items/ transmitters – 10% of each type/model or 1 No. minimum whichever is higher

4.3.12.3. Following spare philosophy shall be followed for the control system:

- a) For relays and passive components in panel, minimum 20% spare components shall be provided.
- b) In addition, 20% spare space shall be provided in panels/junction box / cabinets to install relays or other items in future.

#### **4.4 DATASHEETS**

##### **4.4.1 DATA SHEETS FOR HORIZONTAL CENTRIFUGAL PUMPS**

###### **4.4.1.1. DATA SHEET A**

|  |                               |  |                          |
|--|-------------------------------|--|--------------------------|
|  | 1. Designation: Refer Table-1 |  | 25. Drive transmission : |
|--|-------------------------------|--|--------------------------|

|             |                                                 |                                  |                                                               |
|-------------|-------------------------------------------------|----------------------------------|---------------------------------------------------------------|
|             |                                                 |                                  | Direct / <del>Gear / Pulley</del>                             |
| General     | 2. Number Required : Refer Table-1              |                                  | 26. Seal : <del>Gland Packing</del> /                         |
|             | 3. Tag Numbers : - Refer Table-1                | construction features(continued) | Mechanical Seal                                               |
|             | 4. Location : Indoor / <del>Outdoor</del>       |                                  | <del>Single / Double</del>                                    |
|             | 5. Operation : <del>Continuous</del> /          |                                  | 27. Pump Driver : [Refer Table-1]                             |
|             | Intermittent As And When Required               |                                  | Motor As Per Data Sheets Of<br>Low<br>Voltage Induction Motor |
|             | 6.                                              |                                  | <del>Steam Turbine As</del>                                   |
|             | 7. Liquid Pumped : Fire Water                   |                                  | <del>Diesel Engine As Per<br/>Specification</del>             |
|             | 8. Temperature : Ambient                        |                                  | <del>By Purchaser / Vendor</del>                              |
|             | 9. Specific Gravity : 1                         |                                  | 28. Nozzle orientation:                                       |
| Design Data | 10. Viscosity:<br>Kg/M/S                        |                                  | <del>Side Suction-Side Discharge</del> /                      |
|             | 11. % Solid By Weight : NIL                     |                                  | Horizontal Mono-Block<br>Centrifugal Booster Pump             |
|             | 12. Maximum Size Of Solid :<br>Mm               |                                  | <del>Top Suction-Top Discharge</del>                          |
|             | 13. Design Capacity : Refer Table-1             |                                  | 29. Flange drilling standard :                                |
|             | <del>14. Minimum Suction Head : 0<br/>Mle</del> |                                  | ANSI B 16.5, 150#                                             |
|             | <del>15. Maximum Suction Head : — Mle</del>     |                                  | 30. Flange Face : FF                                          |
|             | <del>16. minimum discharge head:</del>          |                                  | 31.                                                           |
|             | 17. Differential Head : Refer Table-1           | materials of                     | 32. Casing : CI IS 210 GR. FG 260                             |
|             | 18. NPSH Available: Flooded Suction             |                                  | 33. Impeller : Bronze To Is 318 Gr 2                          |
|             | 19. Design Code : IS:5120 (Refer Note-4)        |                                  | 34. Shaft : AISI 410 ASTM A 276                               |
| C           | 20. Type Of Pump : : Refer                      |                                  | 35. Shaft sleeve : ASTM A 276                                 |

|             |                                                            |                                         |                                            |
|-------------|------------------------------------------------------------|-----------------------------------------|--------------------------------------------|
|             | Table-1                                                    |                                         | GR. 410 hardended and tempered             |
|             |                                                            |                                         | 36.Casing Ring : bronze to IS 318 GR 2     |
|             | 21.Impeller: <del>open</del> / <del>semiopen</del> /closed |                                         | 37. Impeller Ring :NA                      |
|             | 22. volute :As Per Mfr's Standard                          |                                         | 38. Stuffing Box Packing :Graphite         |
|             | <del>Single / double / diffuser</del>                      |                                         | 39. Base plate : CS IS 2062 GR. A          |
|             | 23. Shaft : <del>coupled</del> / monoblock                 |                                         | 40. Companion Flanges :For Size            |
|             | 24. Coupling : <del>flexible</del> /spacer                 |                                         | ≤150 Astma 105; ≥150 Is 2062-1992          |
|             | 41. Companion flanges with nuts,                           | spares and maintenance tools and tacles | 57.                                        |
|             | Bolts, Gaskets : Yes/ <del>No</del>                        |                                         | 58.                                        |
|             | 42. Common Base Plate : Yes/ <del>No</del>                 |                                         | 58.1                                       |
|             | 43. Foundation Bolts : Yes/ <del>No</del>                  |                                         | 58.2                                       |
|             | 44. Coupling : Yes/ <del>No</del>                          |                                         | 58.3                                       |
|             | 45. Coupling Guard With Bolts : Yes                        |                                         | 58.4                                       |
| Accessories | 46. Drip Tray : yes/ <del>no</del>                         | performance guarantee                   | 59. Capacity :                             |
|             | 47. lantern ring : <del>yes/no</del>                       |                                         | + (-) nil refer table-1 m <sup>3</sup> /hr |
|             | 48. Bearing temperature gauges :                           |                                         | 60. Differential head :                    |
|             | yes/no                                                     |                                         | + (-) nil refer table-1 mlc                |
|             | 49. Priming tank with accessories :                        |                                         | 61.Power Consumption :                     |
|             | yes/no                                                     |                                         | +NIL (-) (*) kw                            |
|             | Capacity : M <sup>3</sup>                                  | Cost Loading And Penalty                | 62. <del>power consumption</del> :         |
|             | 50. Foot Valve : Yes/No                                    |                                         | rs-<br><del>/kw</del>                      |

|  |                                      |                      |                          |
|--|--------------------------------------|----------------------|--------------------------|
|  | Size And Number : Mm Nb<br>And       |                      | 63.                      |
|  | 51. Strainer: Yes/No                 |                      | 64.                      |
|  | 52. Suction Pressure Gauge : Yes/No  |                      | 65.                      |
|  | 53. Discharge Pressure Gauge: Yes/No | Tests And Inspection | 66.                      |
|  | 54. motor starter : yes/no           |                      |                          |
|  | 55. Recommended Spares : yes/no      |                      | (see note 1)             |
|  | 56. Painting : Epoxy / Synthetic     |                      | 67. Hydrotest Duration : |
|  | enamel yes/no                        |                      | 68.                      |

**TABLE-1**

**DETAIL OF PUMPS**

| SL. NO.<br>IN<br>DATA<br>SHEET | DESCRIPTION               | UNITS              | PUMP-3                                                  |
|--------------------------------|---------------------------|--------------------|---------------------------------------------------------|
| 1.0                            | Designation               |                    | Booster pump<br>[refer note-2]                          |
| 2.0                            | Tag Numbers               | -                  | P-1                                                     |
| 3.0                            | Number Required           | Nos.               | 1                                                       |
| 4.0                            | Design Capacity           | M <sup>3</sup> /Hr | 54                                                      |
| 5.0                            | Differential Head         | Mwc                | 35                                                      |
| --                             | Maximum Speed             | Rpm                | 2900                                                    |
| 6.0                            | TYPE OF PUMP              |                    | Horizontal<br>mono-block<br>centrifugal<br>booster pump |
| 7.0                            | Drive Data/ Prim<br>Mover |                    | Motor                                                   |

**NOTES**

1. Additional tests indicated as 'B' in shops inspection requirements shall also be carried out when it is applicable.

2. pumps shall be capable of furnishing not less than 150% of the rated capacity at a head not less than 65% of the rated head. the shut-off head shall not exceed 120% of the rated head



3. \* value / capacity to be indicated by bidder
4. negative tolerance on capacity, head & efficiency is not acceptable.
5. for Booster pumps MOC shall be as follows:-  
base/adaptor -grey cast iron, impeller / intermediate chamber -AISI-304, shaft-AISI-316

#### 4.4.1.2. SCOPE

This specification covers the general design, materials, construction features, manufacture, shop inspection and testing at manufacturer's works and delivery at site of Horizontal Centrifugal Pumps.

#### 4.4.1.3. CODES AND STANDARDS

The design, materials, construction, manufacture, inspection, testing and performance of horizontal centrifugal pumps shall comply with all currently applicable statutes, regulations and safety codes in the locality where the equipment is to be installed. The equipment shall also conform to latest applicable Indian or equivalent standards. Other international standards are also acceptable, if these are established to be equal or superior to the listed standards. Nothing in this specification shall be construed to relieve the VENDOR of this responsibility.

#### 4.4.1.4. DESIGN REQUIREMENTS

- a) Pumps of a particular category shall be identical and shall be suitable for parallel operation with equal load division. Components of identical pumps shall be interchangeable.
- b) Flow rate versus head curve shall have stable and continuously rising characteristics towards the shut-off head. In case of unstable (drooping) characteristics the duty point shall be well away from the unstable region. Besides the actual flow rate versus head curve, curves for minimum and maximum impeller diameters shall also be shown.
- c) The shut-off head shall be at least 110% of the differential head.
- d) The required NPSH at duty point shall be at least one (1) metre less than the available NPSH.
- e) The rating of the pump driver shall be the larger of the following:
  - The maximum power required by the pump from zero discharge to run-out discharge at site climatic conditions.
  - 110% of the power required at the duty point at site climatic conditions.
- f) The corrosion allowance for pressure parts shall be 3 mm.
- g) Pumps shall run smooth without undue noise and vibration. Noise level produced individually or collectively shall not exceed 85 dB (A) measured at a distance of 1.86 metres from the source in any direction. The overall vibration level shall be as per zones A and B of ISO 10816-1
- h) In case of fire water pumps, pumps and drivers with all the accessories shall meet the requirements of Tariff Advisory Committee (TAC) or any other standard as called for in data sheet A. Pump type shall be as accepted by TAC accredited Agency.

#### 4.4.1.5. CONSTRUCTION FEATURES

- a) In addition to static balancing, impeller and balancing drum shall be balanced dynamically at or near the operating speed.
- b) Pump shall be provided with renewable type casing ring. Pump having capacity 1,000 M3/Hr and above shall be provided with impeller ring in addition to casing ring. The hardness of impeller ring shall be 50 BHN higher than that of casing ring.
- c) Pump casing shall be provided with drain and vent connection with plugged or valve connection.
- d) Bearing shall be oil-lubricated or grease-lubricated and shall have a life of 40,000 hours of working. In case of oil-lubricated bearing, constant oil leveller with magnetic drain plug shall be provided.
- e) Replaceable shaft sleeves shall be provided to protect the shaft where it passes through stuffing box.
- f) Stuffing box shall be of such design that it can be repacked without removing any part other than the gland and lantern ring.
- g) Mechanical seals shall be provided if called for in data sheet - A. If required, a flushing line shall be furnished, complete with strainer and orifice, from the pump discharge to the sealing face. When pumping liquid is not suitable for this purpose, a flushing connection shall be provided so that it can be connected to an external source. Auxiliary piping and plan shall be in accordance with appendix - D of API 610.
- h) The allowable loads on the pump nozzles shall be at least twice the values listed in the relevant tables of API 610 without reference to any other criterion. The base plate shall be designed to cater to the above increased loads.
- i) In addition to accessories listed in data sheet A, any other accessories required for safe and efficient operation of pump shall be provided.
- j) All incidental piping and valves required for sealing, lubrication and cooling for stuffing box packing and/or bearing of pump shall be furnished by the VENDOR.
- k) Leakage from the pump shall be led to the nearest surface drain by OTHERS. Pump VENDOR shall provide necessary arrangement like drip tray, base plate drain connection etc.
- l) All pumps, except for back-pull out type, shall be provided with flexible coupling. Back-pull out type pumps shall be provided with spacer type coupling.
- m) Coupling guard made of expanded metal and bolted to the base plate shall be furnished for all coupled pumps.
- n) In addition to accessories listed in data sheet A, any other accessories required for safe and efficient operation of pump shall be provided.
- o) All incidental piping and valves required for sealing, lubrication and cooling for stuffing box packing and/or bearing of pump shall be furnished by the VENDOR.

- p) Leakage from the pump shall be led to the nearest surface drain by OTHERS. Pump VENDOR shall provide necessary arrangement like drip tray, base plate drain connection etc.

#### 4.4.1.6. TESTS AND INSPECTION

- a) Hydrotest pressure on casing shall be 1.5 times maximum discharge head or twice differential head whichever is higher. (Maximum discharge head = shut-off head + maximum suction head). Unless otherwise stated in data sheet A, the hydrostatic tests on the casing shall be conducted for a minimum duration of 30 minutes.
- b) The pumps shall be tested as per IS 5120, at rated speed at MANUFACTURER's works to measure capacity, total head, efficiency and power. The negative tolerance on efficiency shall be limited to 2.5% and not 5% as indicated in IS 5120. These tests shall form the basis for acceptance of pumps except for vibration and noise. The pumps shall be tested over the range covering from shut-off head to the maximum flow. The duration of the test shall be minimum one (1) hour. Minimum five (5) readings approximately equidistant shall be taken for plotting the performance curves.
- c) After installation, the pumps shall be subjected to testing at site also. If the site performance is found not to meet the requirements regarding vibration and noise as specified, the equipment shall be rectified or replaced by the VENDOR, at no extra cost to the PURCHASER.

#### 4.4.1.7. PERFORMANCE GUARANTEE

- a) Performance parameters to be guaranteed by the VENDOR and tolerances permitted shall be as indicated in specification and/or data sheet A. BIDDER shall confirm acceptance of these by indicating values in data sheet B. Pump or any portion thereof is liable for rejection, if it fails to give any of the guaranteed performance parameters.

### 4.4.2 DATA SHEET FOR HYDRANT VALVE

#### DATA SHEET A

|         |                                                   |                                    |                                                    |
|---------|---------------------------------------------------|------------------------------------|----------------------------------------------------|
| General | 1. Type: Single headed-63 mm size conf            | Materials of construction (contd.) | 17. Hand wheel: <del>as as per is 1030</del> or CI |
|         | to IS 5290 type a with/ without                   |                                    | as per IS 210                                      |
|         | stand post of 80 mm nb                            |                                    | 18. Seat washer:                                   |
|         | 2. <del>Type: double headed conf to is:5290</del> |                                    | rubber as per IS 937 or leather                    |
|         | <del>type b / two valves as above</del>           |                                    | as per is 581                                      |
|         | 3. Lug type: <del>pull out</del> / twist          |                                    | 19. Gland packing: asbestos thread                 |
|         | 4. Flange drilling standard: ANSI                 |                                    | as per IS 4687 /                                   |
|         | B16.5 / is: _____ /                               |                                    | 20. Spring: <del>phosphor bronze wire</del>        |
|         | 5. Companion flange at stand post                 |                                    | as per is 7608 for cu alloy hydrant                |

|                           |                                                                                         |                                          |                                        |
|---------------------------|-----------------------------------------------------------------------------------------|------------------------------------------|----------------------------------------|
|                           | required:<br>yes/no                                                                     |                                          | Valve or SS wire as per IS 6528 for    |
|                           | 6. Size: 63 mm                                                                          |                                          | al alloy/ SS hydrant valve             |
|                           | 7. Scope includes stand post - yes/no                                                   |                                          | 21. Blank cap: ABS plastics            |
|                           | 8. Standpost size: 80 mm/ 100 mm                                                        |                                          | 22. Stand post: same as firewater pipe |
|                           | 9. Water: ordinary/sea water                                                            |                                          | 23. Companion flange at stand post:    |
|                           | 10. Hydrant valve shall bear isi mark                                                   |                                          | Astm a 105                             |
|                           |                                                                                         |                                          | 24.                                    |
|                           | 12.                                                                                     |                                          | 25.                                    |
| Materials of construction |                                                                                         | Painting                                 | 26.                                    |
|                           | 14. Valve body, bonnet, stop valve, Checknut and instantaneous female Outlet            |                                          | 27.                                    |
|                           | 14.1 leaded tin bronze as per gr ltb2                                                   |                                          | 28.                                    |
|                           | — of is 318 or                                                                          |                                          | 29.                                    |
|                           | 14.2 al alloy as per designation                                                        |                                          | 30.                                    |
|                           | 4225, 4450, 4600 of is 617 or                                                           | Painting                                 | 31. Valve top except face of flange    |
|                           | 14.3 SS as per grade 1/4 of IS 3444                                                     |                                          | and instantaneous outlet:              |
|                           | 15. Valve spindle: brass rod as per is                                                  |                                          | PO FIRE RED, shade no. 536 of IS 5     |
|                           | — 319 or is 320 for body of leaded tin bronze or SS as per IS 6603 for body of al or ss |                                          | 32. Hand wheel: black as per IS 2932   |
|                           | 16.                                                                                     | Spares and maintenance tools and tackles | 33.                                    |
| Tests and inspection      | 35. Test pressure for:                                                                  |                                          | 34.                                    |
|                           | 35.1 Water tightness: 14 kg/cm <sup>2</sup> g                                           |                                          | 34.1                                   |
|                           | 35.2 Valve body and gland: 21 kg/cm <sup>2</sup> g                                      |                                          | 34.2                                   |
|                           | 36. Flow test: 900 lpm @ 7.0 kg/cm <sup>2</sup> g                                       |                                          | 34.3                                   |
|                           | 37. As per shop inspection and testsand/or                                              | Approved sub-vendors                     | 41.                                    |
|                           |                                                                                         |                                          | 42.                                    |
|                           |                                                                                         |                                          | 43.                                    |
|                           |                                                                                         |                                          | 44.                                    |
|                           |                                                                                         |                                          | 45.                                    |
|                           |                                                                                         |                                          | 46.                                    |

|             |                                                                                                                    |  |     |
|-------------|--------------------------------------------------------------------------------------------------------------------|--|-----|
|             | as per specification and tac regulations                                                                           |  | 47. |
|             | (note 1)                                                                                                           |  | 48. |
|             | 38.                                                                                                                |  | 49. |
|             | 39.                                                                                                                |  | 60. |
|             | 40.                                                                                                                |  | 51. |
|             |                                                                                                                    |  |     |
| <u>Note</u> |                                                                                                                    |  |     |
| 1.          | Additional tests indicated as 'b' in shops inspection requiremets shall also be carried out when it is applicable. |  |     |
| 2.          | Hydrant valve shall be isi marked.                                                                                 |  |     |

#### 4.4.3 DATA SHEET FOR BRANCH PIPES AND NOZZLES

##### DATA SHEET A

|                           |                                                    |                                          |                                            |
|---------------------------|----------------------------------------------------|------------------------------------------|--------------------------------------------|
| General                   | 1. Standard: IS 903                                | Spares and maintenance tools and tackles | 13.                                        |
|                           | 2.                                                 |                                          | 14.                                        |
|                           | 3.                                                 |                                          | 14.1                                       |
|                           | 4.                                                 |                                          | 14.2                                       |
| Materials of construction | <del>5.1 cu alloy as per sand castings:</del>      | Spares and maintenance tools and tackles | 14.3                                       |
|                           | <del>Gr ltb2 of is 318 or gr htb1 of is 304</del>  |                                          | 14.4                                       |
|                           | <del>Die casting: gr 3 of is 292</del>             |                                          | 14.5                                       |
|                           | <del>Hot forgings: is 291</del>                    | Tests and inspection                     | 15. Test pressure: 21 kg/cm <sup>2</sup> g |
|                           | <del>Gravity die castings: is 1264</del>           |                                          | 16. As per shop inspection and tests       |
|                           | - or -                                             |                                          |                                            |
|                           | <del>5.2 al alloy as per die castings:</del>       |                                          |                                            |
|                           | <del>Designations 4450, 4600 of is 617</del>       |                                          | 17.                                        |
|                           | <del>-or-</del>                                    |                                          | 18.                                        |
|                           | 5.3 SS as per grade 1 - <del>or</del> 4 of IS 3444 |                                          | 19.                                        |
|                           |                                                    | Approved sub-vendors                     | 20.                                        |
|                           | 6. Washer: type b of IS 937                        |                                          | 21.                                        |
|                           | 7. Nozzle spanner: gr 35c4 <del>or</del> 40c8 of   |                                          | 22.                                        |
|                           | IS 1570 (Part 2/Section 1) – with                  |                                          | 23.                                        |
|                           | Plating of chromium or zinc                        |                                          | 24.                                        |

|              |                                                     |  |     |
|--------------|-----------------------------------------------------|--|-----|
| Dimensions   | 9. Branch pipe inlet size: 63 mm                    |  | 25. |
|              | 10. Nozzle bore: 20 / <del>25</del> / 30            |  | 26. |
|              | 11.                                                 |  | 27. |
|              | 12.                                                 |  | 28. |
| <u>Notes</u> |                                                     |  |     |
|              | 1. The branch pipe with nozzle shall be isi marked. |  |     |
|              |                                                     |  |     |
|              |                                                     |  |     |

#### 4.4.4 DATA SHEET FOR FIRE HOSES WITH COUPLING

##### DATA SHEET A

|                           |                                                          |                      |                                                               |
|---------------------------|----------------------------------------------------------|----------------------|---------------------------------------------------------------|
| Standards                 | 1. Hose: IS 636 -type a <del>or type b or</del> is: 8423 | Dimensions           | 7. Diameter: 63 mm                                            |
|                           | <del>is: 14933 -type a or type b or is: 4927</del>       |                      | 8. Length for: (type of hydrant)                              |
|                           | 2. Delivery coupling:                                    |                      | 8.1 (internal / fire escape): <del>7.5 m</del> /15 m (note 2) |
|                           | instantaneous spring lock type                           |                      | 8.2 (external hydrant): 15 m                                  |
|                           | as per IS 903 (note 1)                                   |                      | 9.                                                            |
|                           | 3.                                                       |                      | 10.                                                           |
| Materials of construction | 4. Hose: controlled percolating fire hose pipe           | Spares               | 11.                                                           |
|                           | 5. Delivery couplings:                                   |                      | 11.1                                                          |
|                           | 5.1 <del>cu alloy as per sand castings:</del>            |                      | 11.2                                                          |
|                           | <del>gr ltb2 of is 318 or gr ltb1 of is 304</del>        |                      | 11.3                                                          |
|                           | <del>die castings: gr 3 of is 292</del>                  |                      | 11.4                                                          |
|                           | <del>hot forgings: dc b 1 of is 291</del>                | Tests and inspection | 12. Hose proof pressure: 21.4 or 35 kg/cm <sup>2</sup> (g)    |
|                           | <del>gravity die castings: is 1264</del>                 |                      | 13. Hose burst. Pressure: 35.7 or 50 kg/cm <sup>2</sup> (g)   |
|                           | <del>—or—</del>                                          |                      | 14. Coupling hydrotest: 21 kg/cm <sup>2</sup> (g)             |
|                           | 5.2 <del>al alloy as per die castings:</del>             |                      | 15. As per shop inspection and tests and/or                   |
|                           | <del>is designations of 4450, 4600 of is 617</del>       |                      |                                                               |

|              |                                                                                                                                                                                                                |                      |                                 |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|---------------------------------|
|              |                                                                                                                                                                                                                |                      | and TAC guidelines (see note 3) |
|              | - or -                                                                                                                                                                                                         | Approved sub-vendors | 16.                             |
|              | 5.3 SS as per IS 3444 grade 1 / <del>grade 4</del>                                                                                                                                                             |                      | 17.                             |
|              |                                                                                                                                                                                                                |                      | 18.                             |
|              | 6.                                                                                                                                                                                                             |                      | 19.                             |
| <u>Notes</u> |                                                                                                                                                                                                                |                      |                                 |
| 1.           | Each hose shall have one male half coupling at one end and one female half coupling at the other end. The couplings shall be joined with hosepipe as per the procedure detailed in tac fire protection manual. |                      |                                 |
| 2.           | <del>For tg hall, boiler house and mill bays of a power plant and basements 15 m long hoses shall be used.</del>                                                                                               |                      |                                 |
| 3.           | The fire hose as well as coupling shall be isi marked.                                                                                                                                                         |                      |                                 |
| 4.           | Additional tests indicated as 'B' in shops inspection requirements shall also be carried out when it is applicable.                                                                                            |                      |                                 |
|              | .                                                                                                                                                                                                              |                      |                                 |

#### 4.4.5 DATA SHEET FOR FIRE HOSES CABINETS

##### DATA SHEET A1


|         |    |                                                       |                                |      |                                     |
|---------|----|-------------------------------------------------------|--------------------------------|------|-------------------------------------|
| General | 1. | wall / floor mounted hose                             | Construction features (contd.) |      | Support legs complete with          |
|         |    | Cabinets suitable for 2 nos.63 mm                     |                                |      | Foundation bolts, nuts etc.:        |
|         |    | Dia x 15 m / 7.5 m long hoses and                     |                                |      | Yes / no                            |
|         |    | Accessories : (note 1,2)                              |                                | 12.  | Painting for gi crca moc: (note 10) |
|         |    | ( refer data sheet A2 )                               |                                | 12.1 | External (spray paint):             |
|         | 2. | <del>Wall / floor mounted hose</del>                  |                                |      | A. One coat of red oxide primer     |
|         |    | <del>Cabinets suitable for 2 nos.63 mm</del>          |                                |      | B. Two coats of synthetic enamel    |
|         |    | <del>Dia x 15 m / 7.5 m long hoses, accessories</del> |                                |      | Finesh paint PO RED shade 538 as    |
|         |    | <del>And hose reel as per is 884 :</del>              |                                |      | per IS-5.                           |
|         |    | <del>Size: _____ h x _____ w x _____ d in mm.</del>   |                                | 12.2 | Internal (spray paint):             |
|         |    | (note 1, 2)                                           |                                |      | a. One coat of red oxide primer     |
|         | 3. | <del>Special hose cabinet:-</del>                     |                                |      | B. Two coats of synthetic enamel    |
|         |    |                                                       |                                |      | finesh paint. Shade white           |


|                       |                                                                                                                                                                                                                                  |                                                                 |                                      |      |                                           |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------|--------------------------------------|------|-------------------------------------------|
|                       |                                                                                                                                                                                                                                  |                                                                 | Spares & maintenance tools & tackles | 13.  |                                           |
|                       |                                                                                                                                                                                                                                  | size: _____ h x _____ w x _____ d in mm.                        |                                      | 14.  |                                           |
|                       |                                                                                                                                                                                                                                  | (note 1, 2)                                                     |                                      | 14.1 |                                           |
|                       | 4.                                                                                                                                                                                                                               | canopy required: yes / no                                       |                                      |      |                                           |
|                       |                                                                                                                                                                                                                                  | ( also see note-3)                                              |                                      |      |                                           |
|                       | 5.                                                                                                                                                                                                                               |                                                                 |                                      |      |                                           |
| Construction features | 6.                                                                                                                                                                                                                               | Material of construction of                                     | Tests and inspection                 | 15.  | As per shop inspection and tests and / or |
|                       |                                                                                                                                                                                                                                  | Cabinet body : <del>mp</del> / GI CRCA                          |                                      |      |                                           |
|                       |                                                                                                                                                                                                                                  | IS 277 & base metal conforming                                  |                                      |      | (note 11)                                 |
|                       |                                                                                                                                                                                                                                  | To IS 513                                                       |                                      | 16.  |                                           |
|                       | 7.                                                                                                                                                                                                                               | Thickness of body if material of                                |                                      | 17.  |                                           |
|                       |                                                                                                                                                                                                                                  | Construction is GI CRCA : 16/ <del>18</del> / <del>20</del> SWG |                                      | 18.  |                                           |
|                       |                                                                                                                                                                                                                                  | Grade of zinc coating 200 as per IS 277                         | Approved sub-vendors                 | 19.  |                                           |
|                       | 8.                                                                                                                                                                                                                               | Thickness of glass panel: 3mm                                   |                                      | 20.  |                                           |
|                       | 9.                                                                                                                                                                                                                               | Hammer with chain: 1 set chrome plated                          |                                      | 21.  |                                           |
|                       | 10.                                                                                                                                                                                                                              | Lock with duplicate set of keys                                 |                                      | 22.  |                                           |
|                       |                                                                                                                                                                                                                                  | For each cabinet: yes                                           |                                      | 23.  |                                           |
|                       | 11.                                                                                                                                                                                                                              | Mounting clamps, structural                                     |                                      | 24.  |                                           |
| <u>Notes</u>          |                                                                                                                                                                                                                                  |                                                                 |                                      |      |                                           |
| 1.                    | Following accessories shall be made available inside the hose box after installation at site<br>a. 2 nos. 63 mm dia x 15 m / 7.5m long hoses with coupling<br>b. 1 no. Branch pipe<br>c. 1 no. Nozzle<br>d. 1 no. Nozzle spanner |                                                                 |                                      |      |                                           |
| 2.                    | Floor mounted hose cabinets shall be provided with minimum 1 m high structural support legs.                                                                                                                                     |                                                                 |                                      |      |                                           |
| 3.                    | Canopy is required for hose cabinets to be located outdoors.                                                                                                                                                                     |                                                                 |                                      |      |                                           |




|     |                                                                                                                                                                                            |
|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4.  | Scope of supply with hose cabinets shall not include hoses, hose reels, branch pipes and nozzles.                                                                                          |
| 5.  | The word “FIRE”, in 150 mm letter size in red, shall be painted on the cabinet glass.                                                                                                      |
| 6.  | The cabinet shall be provided with clamps for holding branch pipe, nozzle and hose reel where applicable.                                                                                  |
| 7.  | Provision to keep one key and one hammer in glass covered recess on the side of the cabinet shall be made.                                                                                 |
| 8.  | The cabinet shall be supplied with a small container having a set of spare rubber rings packed in french chalk.                                                                            |
| 9.  | Making of pockets in the wall, grouting of bolts, finishing the wall as before, and mounting of cabinets on to the wall or the structural supports shall be in contractor’s scope.         |
| 10. | Colour shade scheme for FRP hose box shall be same as that mentioned for GI CRCA MOC – however the colour shall be uv resistant fade proof integral type suitable for external atmosphere. |
| 11. | Additional tests indicated as 'b' in shops inspection requirements shall also be carried out when it is applicable.                                                                        |

#### 1.1.2. DATA SHEET A2

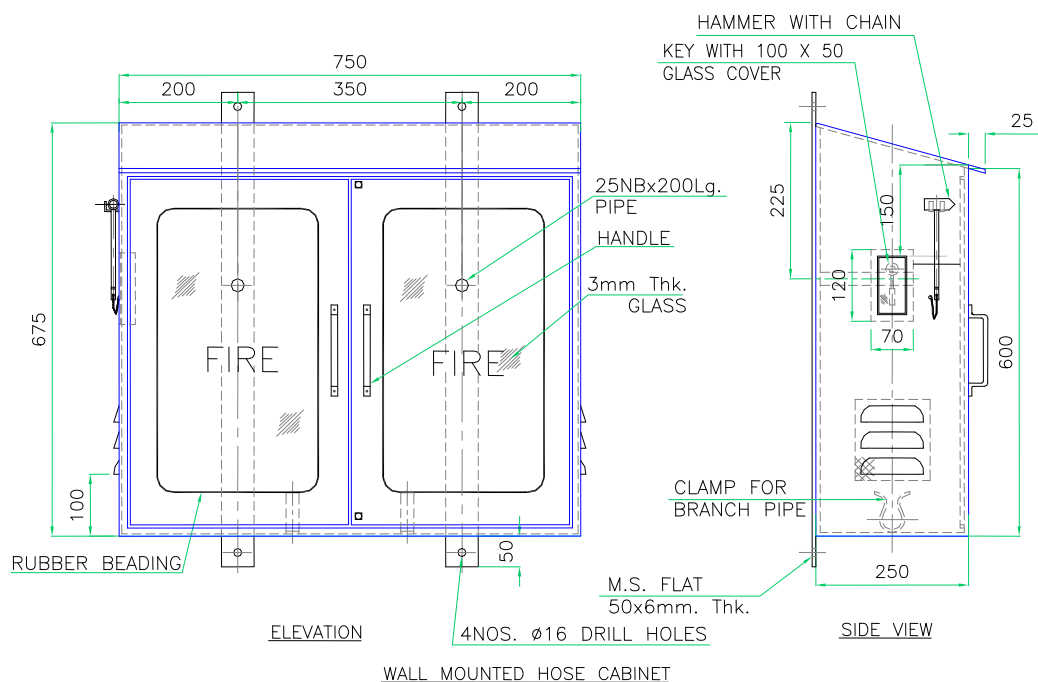

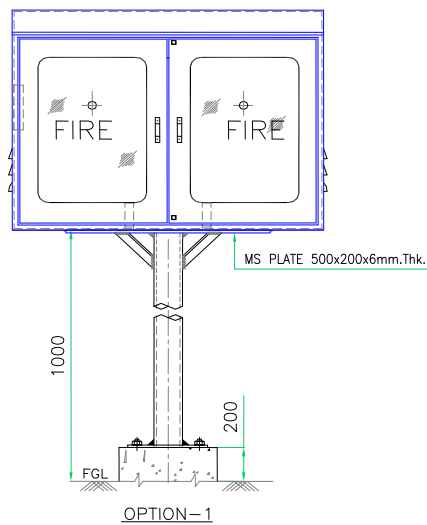

OPTION-1

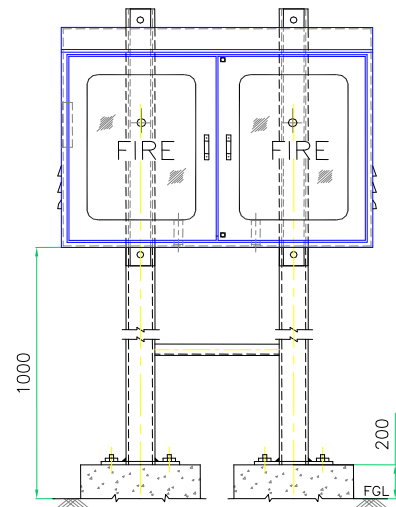

OPTION-2

NOTES :

1. ALL DIMENSIONS ARE IN MM.

TYPICAL DETAILS OF FLOOR MOUNTING

## 4.4.6 DATA SHEET FOR FIRE HOSES REELS

### DATA SHEET A

|                           |     |                                                              |                                          |      |                                            |
|---------------------------|-----|--------------------------------------------------------------|------------------------------------------|------|--------------------------------------------|
| General                   | 1.  | <b>Standards:</b>                                            | Contd.                                   | 11.  | Pipe with fittings: ms as per              |
|                           | 1.1 | Hose reel : IS 884 <del>or BS EN 671-1</del>                 |                                          |      | IS 1239 (part 1 and part 2) <del>or</del>  |
|                           | 1.2 | Nozzle : IS 8090 <del>or BS EN 671-1</del>                   |                                          |      | SS-304                                     |
|                           | 1.3 | Stop valve : as per IS 778 <del>or ball valve</del>          | Construction features                    | 12.  | Hose length : 30 m                         |
|                           |     | As per BS 5159                                               |                                          | 13.  | Hose id : 19/32 mm                         |
|                           | 2.  | Type : swinging (180°) wall                                  |                                          | 15.  | Nozzle id : 6.35 mm maximum                |
|                           |     | Mounting / suitable for                                      | Spares and maintenance tools and tackles | 16.  |                                            |
|                           |     | Mounting in hose cabinet                                     |                                          | 17.  |                                            |
|                           | 3.  | Hose reel connected to                                       |                                          | 18.  |                                            |
|                           |     | Permanent water supply: yes                                  |                                          | 18.1 |                                            |
| Materials of construction | 4.  | Flow through nozzle : minimum 24 lpm                         |                                          | 18.2 |                                            |
|                           | 5.  | Hub : al alloy conforming to a 8 <del>wp of</del>            |                                          | 18.3 |                                            |
|                           |     | Is 617 <del>or</del> CS sheet as per IS 513 <del>or al</del> |                                          | 18.4 |                                            |
|                           |     |                                                              | and inspec                               | 19.  | Hydrostatic pressure 21 kg/cm <sup>2</sup> |

|  |     |                                                      |                     |     |                                          |
|--|-----|------------------------------------------------------|---------------------|-----|------------------------------------------|
|  |     | <del>Sheet as per is 737 or galvanised steel</del>   |                     |     | Or 18 kg/ cm <sup>2</sup> for 5 minutes. |
|  |     | <del>Or glass filled polypropylene</del>             |                     | 20. | As per shop inspection and testsand/     |
|  | 6.  | Sides: CS sheet as per IS 513 <del>or al sheet</del> |                     |     |                                          |
|  |     | <del>As per is 737 or al alloy conforming</del>      |                     |     | And tac guidelines.                      |
|  |     | <del>To a 8 wp of is 617 or carbon steel</del>       |                     |     |                                          |
|  |     | <del>Polyester powder coated</del>                   |                     |     |                                          |
|  | 7.  | Wall bracket: CS as per IS 513                       |                     |     |                                          |
|  |     | <del>Or ci as per is 210</del>                       |                     |     |                                          |
|  | 8.  | Swivel joint : Lead Tin                              | Approved subvendors | 21. |                                          |
|  |     | Bronze gr ltb2 of IS 318                             |                     | 22. |                                          |
|  | 9.  | Hose reel tubing : Reinforced Rubber                 |                     | 23. |                                          |
|  |     | As per IS 444 or EN - 694                            |                     | 24. |                                          |
|  | 10. | Nozzle: gunmetal <del>or nylon or</del>              |                     | 25. |                                          |
|  |     | <del>Acrolonitrile butadiene styrene (abs)</del>     |                     |     |                                          |

#### 4.4.7 DATA SHEETS FOR PORTABLE FIRE EXTINGUISHERS

DATA SHEET A

| Sl. No. | Type               | Capacity | Standard | Tac guide lines | Quantity (As per BOQ) |       |          |          |  | Spare refills | Remarks |
|---------|--------------------|----------|----------|-----------------|-----------------------|-------|----------|----------|--|---------------|---------|
|         |                    |          |          |                 | Flo or                | Wa ll | Colo umn | Troll ey |  |               |         |
|         |                    |          |          |                 | Mounted               |       |          |          |  |               |         |
| 1.      | Sand/ water bucket | 9 lit    |          | Yes             |                       |       |          |          |  |               |         |
| 2.1     | portable           | 2.0 kg   | IS 15683 | Yes/no          |                       |       |          |          |  |               |         |

| Sl. No. | Type            | Capacity                      | Standard | Tac guide lines | Quantity (As per BOQ) |       |          |          |  | Spare refills | Remarks |
|---------|-----------------|-------------------------------|----------|-----------------|-----------------------|-------|----------|----------|--|---------------|---------|
|         |                 |                               |          |                 | Flo or                | Wa ll | Colo umn | Troll ey |  |               |         |
|         |                 |                               |          |                 | Mounted               |       |          |          |  |               |         |
| 2.2     |                 | <del>3.0 kg</del>             |          | Yes/no          |                       |       |          |          |  |               |         |
| 2.3     |                 | 4.5 kg                        | IS 15683 | Yes             |                       |       |          |          |  |               |         |
| 2.4     |                 | <del>6.5 kg</del>             |          | Yes/no          |                       |       |          |          |  |               |         |
| 2.5     |                 | <del>9.0 kg</del>             |          | Yes/no          |                       |       |          |          |  |               |         |
| 2.6     |                 | <del>22.5 kg</del>            |          | Yes/no          |                       |       |          |          |  |               |         |
| 2.7     |                 | <del>6 to 7 kg × 2 nos.</del> |          | Yes/no          |                       |       |          |          |  |               |         |
| 2.8     |                 |                               |          |                 |                       |       |          |          |  |               |         |
| 2.9     |                 |                               |          |                 |                       |       |          |          |  |               |         |
| 3.1     | Chemical foam   | 9.0 lit                       |          | Yes             |                       |       |          | --       |  |               |         |
| 3.2     |                 | 50.0 lit                      |          | Yes/no          | --                    | --    | --       |          |  |               |         |
| 3.3     |                 | 150.0 lit                     |          | Yes/no          | --                    | --    | --       |          |  |               |         |
| 3.4     |                 |                               |          |                 |                       |       |          |          |  |               |         |
| 3.5     |                 |                               |          |                 |                       |       |          |          |  |               |         |
| 3.6     |                 |                               |          |                 |                       |       |          |          |  |               |         |
| 3.7     |                 |                               |          |                 |                       |       |          |          |  |               |         |
| 3.8     |                 |                               |          |                 |                       |       |          |          |  |               |         |
| 3.9     |                 |                               |          |                 |                       |       |          |          |  |               |         |
| 4.1     | Mechanical foam | <del>9.0 lit</del>            | IS 15683 | Yes             |                       |       |          |          |  |               |         |
| 4.2     |                 | <del>135.0 lit</del>          | IS 14951 | Yes/no          |                       |       |          |          |  |               |         |
| 4.3     |                 |                               |          |                 |                       |       |          |          |  |               |         |
| 4.4     |                 |                               |          |                 |                       |       |          |          |  |               |         |
| 4.5     |                 |                               |          |                 |                       |       |          |          |  |               |         |
| 4.6     |                 |                               |          |                 |                       |       |          |          |  |               |         |
| 4.7     |                 |                               |          |                 |                       |       |          |          |  |               |         |
| 4.8     |                 |                               |          |                 |                       |       |          |          |  |               |         |
| 5.1     | Soda acid       | 9.0 lit                       |          | Yes/no          |                       |       |          | --       |  |               |         |
| 5.2     |                 | 50.0 lit                      |          | Yes/no          | --                    | --    | --       |          |  |               |         |
| 5.3     |                 |                               |          |                 |                       |       |          |          |  |               |         |

| Sl. No. | Type                                            | Capacity | Standard | Tac guide lines | Quantity (As per BOQ) |       |          |          |  | Spare refills | Remarks |
|---------|-------------------------------------------------|----------|----------|-----------------|-----------------------|-------|----------|----------|--|---------------|---------|
|         |                                                 |          |          |                 | Flo or                | Wa ll | Colo umn | Troll ey |  |               |         |
|         |                                                 |          |          |                 | Mounted               |       |          |          |  |               |         |
| 5.4     |                                                 |          |          |                 |                       |       |          |          |  |               |         |
| 6.1     | Abc type dry chemical powder with map-90 powder | 0.5 kg   |          | Yes/no          |                       |       |          | --       |  |               |         |
| 6.2     |                                                 | 1.0 kg   |          | Yes/no          |                       |       |          | --       |  |               |         |
| 6.3     |                                                 | 2.0 kg   |          | Yes/no          |                       |       |          | --       |  |               |         |
| 6.4     |                                                 | 6.0 kg   | IS 15683 | Yes             |                       |       |          | --       |  |               |         |
| 6.5     |                                                 | 9.0 kg   | IS 15683 | Yes             |                       |       |          | --       |  |               |         |
| 6.6     |                                                 | 1.0 kg   |          | Yes/no          |                       |       |          | --       |  |               |         |
| 6.7     |                                                 | 2.0 kg   |          | Yes/no          |                       |       |          | --       |  |               |         |
| 6.8     |                                                 | 5.0 kg   |          | Yes/no          |                       |       |          | --       |  |               |         |
| 6.9     |                                                 | 10.0 kg  |          | Yes/no          |                       |       |          | --       |  |               |         |
| 6.10    |                                                 | 25.0 kg  | IS 10658 | Yes             | --                    | --    | --       |          |  |               |         |
| 6.11    |                                                 | 50.0 kg  |          | Yes/no          | --                    | --    | --       |          |  |               |         |
| 6.12    |                                                 | 75.0 kg  |          | Yes/no          | --                    | --    | --       |          |  |               |         |
| 6.13    |                                                 |          |          |                 |                       |       |          |          |  |               |         |
| 6.14    |                                                 |          |          |                 |                       |       |          |          |  |               |         |
| 7.1     | Halon-1211                                      | 1.25 kg  | IS 11108 | Yes/no          |                       |       |          | --       |  | --            |         |
| 7.2     |                                                 | 2.5 kg   | IS 11108 | Yes/no          |                       |       |          | --       |  | --            |         |
| 7.3     |                                                 | 4.0 kg   | IS 11108 | Yes/no          |                       |       |          | --       |  | --            |         |
| 7.4     |                                                 | 5.0 kg   | IS 11108 | Yes/no          |                       |       |          | --       |  | --            |         |
| 7.5     |                                                 | 6.5 kg   | IS 11108 | Yes/no          |                       |       |          | --       |  | --            |         |
| 7.6     |                                                 |          |          |                 |                       |       |          |          |  |               |         |
| 7.7     |                                                 |          |          |                 |                       |       |          |          |  |               |         |
| 7.8     |                                                 |          |          |                 |                       |       |          |          |  |               |         |
| 7.9     |                                                 |          |          |                 |                       |       |          |          |  |               |         |
| 8.1     | (gas cartridge)                                 | 9.0 lit  | IS 15683 | Yes             |                       |       |          | --       |  |               |         |
| 8.2     |                                                 |          |          |                 |                       |       |          |          |  |               |         |

| Sl. No.                                  | Type                                                                                                                                                                                                                                  | Capacity | Standard | Tac guide lines | Quantity (As per BOQ) |                      |          |          |  | Spare refills | Remarks |
|------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------|-----------------|-----------------------|----------------------|----------|----------|--|---------------|---------|
|                                          |                                                                                                                                                                                                                                       |          |          |                 | Flo or                | Wa ll                | Colo umn | Troll ey |  |               |         |
|                                          |                                                                                                                                                                                                                                       |          |          |                 |                       |                      |          |          |  |               |         |
| 8.3                                      |                                                                                                                                                                                                                                       |          |          |                 |                       |                      |          |          |  |               |         |
| 8.4                                      |                                                                                                                                                                                                                                       |          |          |                 |                       |                      |          |          |  |               |         |
| 8.5                                      |                                                                                                                                                                                                                                       |          |          |                 |                       |                      |          |          |  |               |         |
| Spares and maintenance tools and tackles | 9.                                                                                                                                                                                                                                    |          |          |                 |                       | Approved sub-vendors | 11.      |          |  |               |         |
|                                          | 10.                                                                                                                                                                                                                                   |          |          |                 |                       |                      | 12.      |          |  |               |         |
|                                          | 10.1                                                                                                                                                                                                                                  |          |          |                 |                       |                      | 13.      |          |  |               |         |
|                                          | 10.2                                                                                                                                                                                                                                  |          |          |                 |                       |                      | 14.      |          |  |               |         |
|                                          | 10.3                                                                                                                                                                                                                                  |          |          |                 |                       |                      | 15.      |          |  |               |         |
|                                          | 10.4                                                                                                                                                                                                                                  |          |          |                 |                       |                      | 16.      |          |  |               |         |
|                                          | 10.5                                                                                                                                                                                                                                  |          |          |                 |                       |                      | 17.      |          |  |               |         |
|                                          | 10.6                                                                                                                                                                                                                                  |          |          |                 |                       |                      | 18.      |          |  |               |         |
| <u>notes</u>                             |                                                                                                                                                                                                                                       |          |          |                 |                       |                      |          |          |  |               |         |
| 1.                                       | All items conforming to is shall be isi marked.                                                                                                                                                                                       |          |          |                 |                       |                      |          |          |  |               |         |
| 2.                                       | Tests and inspection shall be as per shop inspection and testsand/ applicable indian standards and tac regulations. Additional tests indicated as 'b' in shops inpection requiremets shall also be carried out when it is applicable. |          |          |                 |                       |                      |          |          |  |               |         |
| 3.                                       | Mounting clamps and structural support legs complete with nuts and bolts etc. Shall be provided by the vendor for floor, wall and column mounted portable fire extingushers.                                                          |          |          |                 |                       |                      |          |          |  |               |         |
|                                          |                                                                                                                                                                                                                                       |          |          |                 |                       |                      |          |          |  |               |         |

#### 4.4.8 VALVES AND SPECIALITIES GENERAL REQUIREMENTS

##### 4.4.9.1. SCOPE

The following paragraphs describe general requirements for valves and specialities. Only the applicable paragraphs for the type of valve or speciality are to be considered along with data sheet-A. These apply unless specified otherwise in data sheet-A.

##### 4.4.9.2. CODES AND STANDARDS

Valves and specialities shall be generally as per the following standards:

ANSI B16.1 : Cast Iron Valve Ratings

|             |   |                                                       |
|-------------|---|-------------------------------------------------------|
| ASME B16.34 | : | Ratings of Valves-Flanged, Threaded and Welding Ends  |
| API 594     | : | Wafer and Wafer - Lug Check Valves                    |
| API 600     | : | Steel Flanged and Butt Welding End Gate Valves        |
| API 602     | : | Steel Gate Valves, Threaded and Socket Welding Ends   |
| API 609     | : | Butterfly Valves                                      |
| BS 1414     | : | Steel Gate Valves, Flanged and Butt Welding Ends      |
| BS 1868     | : | Steel Check Valves, Flanged and Butt Welding Ends     |
| BS 1873     | : | Steel Globe Valves, Flanged and Butt Welding Ends     |
| BS 5156     | : | Diaphragm Valves                                      |
| BS 5351     | : | Steel Ball Valves                                     |
| BS 5352     | : | Steel Gate, Globe and Check Valves, 50 mm and Smaller |
| IS 778      | : | Bronze Valves                                         |
| MSS-SP 67   | : | Butterfly Valves                                      |

#### 4.4.9.3. GEAR OPERATORS

Gear operators shall be provided on the following basis:

#### 4.4.9.4. GATE AND GLOBE VALVES

|                                    |   |                   |
|------------------------------------|---|-------------------|
| Up to and including ANSI 300 class | - | 350 mm and larger |
| 600 class and higher               | - | 200 mm and larger |

#### 4.4.9.5. OTHER VALVES

|               |   |                   |
|---------------|---|-------------------|
| Plug and ball | - | 150 mm and larger |
| Butterfly     | - | 200 mm and larger |

Gear operators shall be suitable for a differential pressure corresponding to the maximum valve rating at room temperature.

All gear operators shall be of the enclosed type.

#### 4.4.9.6. INTEGRAL BYPASS

Gate valves shall be provided with integral bypass valve, as per MSS-SP 45, as follows:

|                      |   |                   |
|----------------------|---|-------------------|
| Classes 150 and 300  | - | 350 mm and larger |
| Class 600 and higher | - | 200 mm and larger |

Type of bypass valve shall generally be the same as the main valve. Bypass pipe shall be at least schedule 80 and material of construction of bypass valve and pipe shall be compatible with the main valve.

#### 4.4.9.7. VALVE STEMS

Valve stems shall be of wrought materials. Castings are not acceptable.

#### 4.4.9.8. BACKSEAT

All gate, globe and piston valves shall be provided with back seating arrangement to facilitate replacement of gland packing with the valve in service.

#### 4.4.9.9. CHECK VALVES

Check valves of sizes 350 mm and larger shall be provided with features to prevent slamming and hammering. These can be in the form of springs or external dash pot.

#### 4.4.9.10. HARDNESS

13% chromium steel seat surfaces shall have a minimum hardness of 250 BHN and a differential hardness of 50 BHN.

#### 4.4.9.11. NAME PLATES

The details on name plates shall be as per MSS-SP 25.



#### 4.4.9.12. TAG PLATES

Tag plates shall be of stainless steel type 304 or aluminium.

#### 4.4.9.13. TESTING

Strength and leak tests shall be as per any of the standards MSS-SP-61, API 598 or BS EN 12266-1 and 2 at the test pressures indicated in data sheet-A. Stainless steel valves shall be tested using potable water.

#### 4.4.9.14. NDT REQUIREMENTS

All cast steel valves shall be subject to radiography in all accessible areas, as defined in ASME B16.34, on the following basis:

- (a) Class 600 and higher - All sizes
- (b) Class 300 - Sizes 450 mm and larger
- (c) Class 150 - Sizes 600 mm and larger

All cast steel valves of class 600 and higher shall also be subject to magnetic particle or liquid penetrant examination as per ASME B16.34.

All cast steel valves of class 300 shall have radiography quality castings irrespective of size.

Acceptable levels of defects shall be as per ASME B16.34.

#### 4.4.9.15. FACE-TO-FACE OR END-TO-END DIMENSIONS

Face-to-face dimensions of flanged-end valves and end-to-end dimensions of butt welding-end valves shall be as per ASME B16.10.

For valves not covered by ASME B16.10, the dimensions shall be as per applicable valve standards.

#### 4.4.9.16. PREPARATION FOR DESPATCH

##### COATING

All carbon steel and cast iron exposed surfaces shall be given one coat of primer and two coats of aluminium finish paint after release has been given for painting and before despatch. Machined surfaces shall be coated with an easily removable rust protective except that this is not applicable for austenitic stainless steel components.

##### END PROTECTION

After completion of the requirements of para 14.1, body end ports, flange faces and welding ends shall be covered with suitable close fitting protectors to protect the machined ends and prevent ingress of dirt and moisture.

### DISC

The disc shall be closed before despatch except in the case of soft-seated valves where the disc shall be backed off to relieve the pressure on the seal.

### PACKING

Valves and specialities shall be so packed as to minimise the possibility of damage during storage or transit. The packing shall be suitable for tropical conditions.

#### 4.4.9.17. DATA SHEET-A (GATE VALVE)

|                       |     |                                                         |            |                                 |  |  |      |                       |    |    |    |
|-----------------------|-----|---------------------------------------------------------|------------|---------------------------------|--|--|------|-----------------------|----|----|----|
| General               | 1.  | Tag no.:                                                | Later      |                                 |  |  | Size | Quantity (As per BOQ) |    |    |    |
|                       | 2.  | Size range:                                             | ≥ 50 NB    |                                 |  |  |      |                       |    |    |    |
|                       | 3.  | Rating:                                                 | PN 1.6     |                                 |  |  | Mm   | P0                    | R0 | R1 | R2 |
|                       | 4.  | Grade:                                                  | CT         |                                 |  |  |      |                       |    |    |    |
|                       | 5.  | Fluid :                                                 | Fire water |                                 |  |  |      |                       |    |    |    |
| Construction features | 8.  | Stem : rising- outside screw & yoke                     |            |                                 |  |  |      |                       |    |    |    |
|                       | 9.  | Ends : Flanged, FF SERR conc. Finish as per ANSI B 16.5 |            |                                 |  |  |      |                       |    |    |    |
|                       | 10. | bonnet : bolted                                         |            |                                 |  |  |      |                       |    |    |    |
|                       | 11. | wedge : solid                                           |            |                                 |  |  |      |                       |    |    |    |
|                       | 12. | operator : handwheel                                    |            |                                 |  |  |      |                       |    |    |    |
|                       | 13. | seat : body -renewable                                  |            |                                 |  |  |      |                       |    |    |    |
|                       | 14. | : wedge-integral                                        |            |                                 |  |  |      |                       |    |    |    |
|                       | 15. | Other requirements :                                    |            |                                 |  |  |      |                       |    |    |    |
|                       | 16. | Conforming to IS 14846                                  |            |                                 |  |  |      |                       |    |    |    |
| Materials             | 17. | Body/ bonnet                                            | :          | Cast iron to IS: 210 GR. FG 260 |  |  |      |                       |    |    |    |
|                       | 18. | Wedge                                                   | :          | Cast iron to IS: 210 GR. FG 260 |  |  |      |                       |    |    |    |
|                       | 19. | Stem                                                    | :          | 13 % CR steel as per IS 6603    |  |  |      |                       |    |    |    |
|                       | 20. | Body seat ring                                          | :          | Gun metal as per IS 318 ltb 2   |  |  |      |                       |    |    |    |
|                       | 21. | Wedge facing ring                                       | :          | Gun metal as per IS 318 ltb 2   |  |  |      |                       |    |    |    |

|                                                                                                                                                                                                             |         |                                                 |   |                                 |  |  |  |  |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|-------------------------------------------------|---|---------------------------------|--|--|--|--|--|
|                                                                                                                                                                                                             | 2<br>1. | Gland packing                                   | : | Jute & hemp                     |  |  |  |  |  |
|                                                                                                                                                                                                             | 2<br>2. | Gasket                                          | : | Rubber as per IS 638 type b     |  |  |  |  |  |
|                                                                                                                                                                                                             | 2<br>3. | Bolts & nuts                                    | : | Cs as per IS 1363 cl 4.6 / 4.0  |  |  |  |  |  |
|                                                                                                                                                                                                             | 2<br>4. | handwheel                                       | : | Cast iron to IS: 210 gr. Fg 260 |  |  |  |  |  |
| Tests & inspection                                                                                                                                                                                          | 2<br>5. | Shell hydro                                     | : | 24 Kg/ sq. Cm. Duration 5 mins. |  |  |  |  |  |
|                                                                                                                                                                                                             | 2<br>6. | Seat hydro                                      | : | 16 Kg/ sq. Cm. Duration 2 mins. |  |  |  |  |  |
|                                                                                                                                                                                                             | 2<br>7. |                                                 |   |                                 |  |  |  |  |  |
|                                                                                                                                                                                                             | 2<br>8. | Inspection :as per shop inspection and testsand |   |                                 |  |  |  |  |  |
| Notes: 1. General requirements: as per valves and specialities general requirements<br>2. Additional tests indicated as 'B' in shops inpection requiremets shall also be carried out when it is applicable. |         |                                                 |   |                                 |  |  |  |  |  |

#### 4.4.9.18. DATA SHEET-A (WAFER CHECK VALVES)

|                       |     |                    |   |                              |                         |      |                      |    |    |    |
|-----------------------|-----|--------------------|---|------------------------------|-------------------------|------|----------------------|----|----|----|
| General               | 1.  | Tag no.            | : |                              | 4. Fluid : fresh water  | Size | Quantity(As per BOQ) |    |    |    |
|                       | 2.  | Size range         | : | ≥ 50 NB                      | 5. Des. Pr. : *         |      |                      |    |    |    |
|                       | 3.  | Rating             | : | PN 1.6                       | 6. Des. Temp. : ambient | Mm   | P0                   | R0 | R1 | R2 |
|                       | 7.  | Standard           | : | API 594                      | Grade: CT               |      |                      |    |    |    |
| Construction features | 8.  | Type               | : | Dual plate, spring-loaded    |                         |      |                      |    |    |    |
|                       | 9.  | Ends               | : | Wafer to suit ANSI 150 Class |                         |      |                      |    |    |    |
|                       |     |                    |   | Flanges, RF, SERR. Finish    |                         |      |                      |    |    |    |
|                       | 10. |                    |   |                              |                         |      |                      |    |    |    |
|                       | 11. |                    |   |                              |                         |      |                      |    |    |    |
|                       | 12. |                    |   |                              |                         |      |                      |    |    |    |
|                       | 13. |                    |   |                              |                         |      |                      |    |    |    |
|                       | 14. | Other requirements | : |                              |                         |      |                      |    |    |    |
|                       |     |                    |   |                              |                         |      |                      |    |    |    |

|                                                                                                                                                                                                              |      |                      |   |                       |      |  |  |  |  |  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|----------------------|---|-----------------------|------|--|--|--|--|--|
|                                                                                                                                                                                                              |      |                      |   |                       |      |  |  |  |  |  |
|                                                                                                                                                                                                              |      |                      |   |                       |      |  |  |  |  |  |
|                                                                                                                                                                                                              |      |                      |   |                       |      |  |  |  |  |  |
| Materials                                                                                                                                                                                                    | 15 . | Body                 | : | CI, IS 210 GR. FG 260 |      |  |  |  |  |  |
|                                                                                                                                                                                                              | 16 . | Plate                | : | Carbon steel          |      |  |  |  |  |  |
|                                                                                                                                                                                                              | 17 . | Seal                 | : | Nitrile               |      |  |  |  |  |  |
|                                                                                                                                                                                                              | 18 . | Plate seat           | : | Mfr's standard        |      |  |  |  |  |  |
|                                                                                                                                                                                                              | 19 . | Spring               | : | Spring steel          |      |  |  |  |  |  |
|                                                                                                                                                                                                              | 20 . | Hinge pin & stop pin | : | SS 304                |      |  |  |  |  |  |
|                                                                                                                                                                                                              | 21 . |                      |   |                       |      |  |  |  |  |  |
| Tests & inspection                                                                                                                                                                                           | 24 . | Shell hydro          | : | 24                    | Barg |  |  |  |  |  |
|                                                                                                                                                                                                              | 25 . | Seat hydro           | : | 16                    | Barg |  |  |  |  |  |
|                                                                                                                                                                                                              | 26 . | Inspection :         |   |                       |      |  |  |  |  |  |
| Notes: 1. General requirements: as per valves and specialities general requirements<br>2. Additional tests indicated as 'B' in shops inspection requiremets shall also be carried out when it is applicable. |      |                      |   |                       |      |  |  |  |  |  |

#### 4.4.9.19. DATA SHEET-A (Y STRAINER)

|             |     |                                 |                             |
|-------------|-----|---------------------------------|-----------------------------|
| Design data | 1.  | Tag no.                         | Later                       |
|             | 2.  | Quantity required               | As per BOQ                  |
|             | 3.  | Location                        | As per P & ID               |
|             | 4.  | Type                            | Y type                      |
|             | 5.  | Fluid                           | Fire water                  |
|             | 6.  | Flow rate<br>m <sup>3</sup> /hr | As per detailed engineering |
|             | 7.  | Operating pressure barg         | 16                          |
|             | 8.  | Operating temperature ° c       | Ambient                     |
|             | 9.  | Design pressure barg            | 11                          |
|             | 10. | Design temperature ° c          | 50                          |

|                   |       |                                                          |                                                                                                |
|-------------------|-------|----------------------------------------------------------|------------------------------------------------------------------------------------------------|
|                   | 11.   | Fluid viscosity (cp) at op.temp.                         | 1                                                                                              |
|                   | 12.   | Fluid sp. Gravity at op. Temp.                           | 1                                                                                              |
|                   | 13.   | Max. Permissible pr. Drop<br>Under 50% clogged condition | 0.5 bar(g) – for strainers on pump suction line<br>1 bar(g) – for strainers on other locations |
|                   | 14.   | Screen basket data                                       | *                                                                                              |
|                   |       | 1. Dia of perforations, mm                               | *                                                                                              |
|                   |       | 2. Min. Thickness, mm                                    | *                                                                                              |
|                   |       | 3. Free straining area                                   | Four times pipe cross sectional area min                                                       |
|                   | 15.   | Steam jacket                                             | No                                                                                             |
|                   |       | 1. Inlet pr. Barg, op. / desn.                           | -                                                                                              |
|                   |       | 2. Inlet temp. ° c, op./desn.                            | -                                                                                              |
|                   | 16.   | End connections                                          | RF                                                                                             |
|                   |       | 1. Size, NB mm                                           | As per drawings                                                                                |
|                   |       | 2. Type                                                  | Flanged                                                                                        |
|                   |       | 3. Details/ standards                                    | ANSI B 16.5, 150 #                                                                             |
|                   | 17.   | Cover                                                    | Bolted                                                                                         |
|                   | 18.   | Ibr approval                                             | No                                                                                             |
| Materials         | 19.   | Body                                                     | Is:2062/IS:1239(pt-1)/IS:3589                                                                  |
|                   | 20.   | Cover                                                    | IS:2062                                                                                        |
|                   | 21.   | Screen basket                                            | SS 304                                                                                         |
|                   | 22.   | Bolts/ studs                                             | ASTM A 193 B7                                                                                  |
|                   | 23.   | Nuts                                                     | ASTM A 194 2H                                                                                  |
|                   | 24.   | Gaskets                                                  | ARAMID FIBRE                                                                                   |
|                   | 25.   | Jacket                                                   | NA                                                                                             |
|                   | 26.   | Jacket couplings/ flanges                                | NA                                                                                             |
| ests & inspection | 27.   | Accessories by vendor:                                   |                                                                                                |
|                   | 27. 1 | Foundation bolts                                         | No                                                                                             |
|                   | 27. 2 | Differential pressure gauge                              | No                                                                                             |
|                   | 27. 3 | Drain/ vent cock (ss 316)                                | Yes                                                                                            |
|                   | 27. 4 | Support legs                                             | No                                                                                             |
|                   | 26.   | Hydrostatic test pressure, barg                          |                                                                                                |
|                   | 26. 1 | Shell side                                               | 1.5 x design press.                                                                            |
|                   | 26. 2 | Jacket side                                              | Not applicable                                                                                 |
|                   | 27.   | Vacuum test required                                     | No                                                                                             |
|                   | 28.   | Pressure drop test required                              |                                                                                                |
|                   |       | Clean/ 50% clogged                                       | Yes                                                                                            |
|                   | 29.   | Inspection: as per a) shop inspection and testsand       |                                                                                                |
|                   |       |                                                          |                                                                                                |
|                   | 30.   |                                                          |                                                                                                |

- Notes: 1. General requirements: as per valves and specialties general requirements  
 2. Additional tests indicated as 'b' in shops inspection requirements shall also be carried out when it is applicable.  
 3. '\*': Bidder to furnish information.  
 4. Additional tests indicated as 'B' in shops inspection requirements shall also be carried out when it is applicable.  
 5. Gasket shall be metal wire-reinforced and graphited both sides.

#### 4.4.9.20. AIR RELEASE VALVE

Air release valve shall be 15mm screwed inlet Brass single acting type and shall be fixed on all high points in the system (wet riser) with ball valves or as shown on drawings, suitable for pressure not less than 15 Kg/Sq.cm

#### 4.4.9 FIRE PROTECTION SYSTEM PIPING MATERIAL SPECIFICATION (GRADE CT)

|                                    |                                |          |     |     |     |     |     |                                |  |  |                          |  |  |
|------------------------------------|--------------------------------|----------|-----|-----|-----|-----|-----|--------------------------------|--|--|--------------------------|--|--|
| Service : fire water (fresh water) |                                |          |     |     |     |     |     |                                |  |  |                          |  |  |
|                                    |                                |          |     |     |     |     |     |                                |  |  |                          |  |  |
| Design                             | Temp. ° f / ° c                | 50       |     |     |     |     |     | Corr. All. <del>Inch</del> /mm |  |  | 1.5                      |  |  |
|                                    | Pr. Psig/ kg/cm <sup>2</sup> g | 8.8      |     |     |     |     |     | flange facing                  |  |  | Rf, conc.serr. (note -1) |  |  |
| Nom. Pipe size                     | <del>Inch</del><br>mm          | ≤ 150    | 200 | 250 | 300 | 350 | 400 |                                |  |  |                          |  |  |
| Outside dia.                       | <del>Inch</del><br>mm          |          | 219 | 273 | 324 | 356 | 406 |                                |  |  |                          |  |  |
| Thickness                          | <del>Inch</del><br>mm          | Heavy Cl | 6   | 6   | 6   | 6   | 8   |                                |  |  |                          |  |  |
| Nom. Pipe size                     | Inch<br>mm                     |          |     |     |     |     |     |                                |  |  |                          |  |  |
| Outside dia.                       | Inch<br>mm                     |          |     |     |     |     |     |                                |  |  |                          |  |  |

|                      |                              |      |                                      |                        |  |                      |  |                                                                                         |  |  |  |  |  |
|----------------------|------------------------------|------|--------------------------------------|------------------------|--|----------------------|--|-----------------------------------------------------------------------------------------|--|--|--|--|--|
| Thickness            |                              | Inch |                                      |                        |  |                      |  |                                                                                         |  |  |  |  |  |
|                      |                              | mm   |                                      |                        |  |                      |  |                                                                                         |  |  |  |  |  |
| Line joint           |                              |      | $\leq 40$ - SW TO ANSI B16.11        |                        |  |                      |  |                                                                                         |  |  |  |  |  |
|                      |                              |      | $\geq 50$ - BW TO ANSI B16.25        |                        |  |                      |  |                                                                                         |  |  |  |  |  |
| Item                 |                              |      | Nominal pipe Size range<br>Inch / mm | Material Specification |  | Dimensional Standard |  | Remarks                                                                                 |  |  |  |  |  |
| Pipes                |                              |      | $\leq 150$                           | IS 1239 PT.1           |  | IS 1239 PT.1         |  | ERW, BLACK, $\leq 40$ - PE, $\geq 50$ - BE                                              |  |  |  |  |  |
|                      |                              |      | $\geq 200$                           | IS 3589 GR. FE 410     |  | IS 3589              |  | ERW / EFW, BLACK, BE                                                                    |  |  |  |  |  |
| B.w. fittings        | Elbows, caps, reducers ,tees |      | 50 to 150                            | ASTM A234 GR. WPB      |  | ANSI B16.9           |  | SCH40, SMLS ( NOTE -2 )                                                                 |  |  |  |  |  |
|                      |                              |      |                                      |                        |  |                      |  |                                                                                         |  |  |  |  |  |
|                      | Stub ends                    |      |                                      |                        |  |                      |  |                                                                                         |  |  |  |  |  |
| S.w.fittings         |                              |      | $\leq 40$                            | ASTM A105              |  | ANSI B16.11          |  | 3000CL                                                                                  |  |  |  |  |  |
| Fabricated reducers  |                              |      | $\geq 200$                           | Same as pipe           |  |                      |  | Included angle =30 <sup>0</sup> , Site fabricated                                       |  |  |  |  |  |
| Mitres               |                              |      | $\geq 200$                           | Same as pipe           |  | R=1.5 d              |  | 15 <sup>0</sup> , 30 <sup>0</sup> , 30 <sup>0</sup> , 15 <sup>0</sup> , Site fabricated |  |  |  |  |  |
| Branch connections   |                              |      | All                                  | Same as pipe           |  |                      |  | Use stub-in type                                                                        |  |  |  |  |  |
| Flanges              |                              |      | $\leq 150$                           | ASTM A105              |  | ANSI B 16.5          |  | So , 150 CL                                                                             |  |  |  |  |  |
|                      |                              |      | 200 to 300                           | IS 2062 GR. A          |  | ANSI B 16.5          |  | So , 150 CL                                                                             |  |  |  |  |  |
|                      |                              |      | $\geq 350$                           | IS 2062 GR. A          |  | ANSI B 16.5          |  | So , 150 cl, light weight (note -3)                                                     |  |  |  |  |  |
| Blind flanges        |                              |      | $\leq 150$                           | ASTM A105              |  | ANSI B 16.5          |  | 150 cl                                                                                  |  |  |  |  |  |
|                      |                              |      | 200 to 300                           | IS 2062 GR. A          |  | ANSI B 16.5          |  | 150 cl                                                                                  |  |  |  |  |  |
|                      |                              |      | $\geq 350$                           | IS 2062 GR. A          |  | ANSI B 16.5          |  | 150 cl, light weight (note -3)                                                          |  |  |  |  |  |
| Machine / stud bolts |                              |      | All                                  | IS 1367                |  | IS 1364 CL 4.6       |  |                                                                                         |  |  |  |  |  |
|                      |                              |      |                                      |                        |  |                      |  |                                                                                         |  |  |  |  |  |

| ITEM               | NOMINAL PIPE SIZE RANGE<br>inch / mm      | MATERIAL SPECIFICATION | DIMENSIONAL STANDARD | REMARKS                                                            |                         |                  |                                                        |
|--------------------|-------------------------------------------|------------------------|----------------------|--------------------------------------------------------------------|-------------------------|------------------|--------------------------------------------------------|
| HEAVY HEX. NUTS    | ALL                                       | IS 1367                | IS 1364 CL4          |                                                                    |                         |                  |                                                        |
| GASKETS            | ALL                                       | BLACK RUBBER           | ANSI B16.21 CL150    | 3mm THICK RING , SELF CENTERING TYPE<br>(NOTE-1) SHORE HARDNESS 60 |                         |                  |                                                        |
| THREADED FITTINGS  | ≤ 40                                      | ASTM A105              | ANSI B 16.11         | 3000 / 2000 CL, NPT / IS 554 TAPER AS REQUIRED                     |                         |                  |                                                        |
|                    |                                           |                        |                      |                                                                    |                         |                  |                                                        |
|                    |                                           |                        |                      |                                                                    |                         |                  |                                                        |
| TYPE OF VALVE      | SIZE RANGE                                | MATERIAL               |                      | PRESSURE RATING                                                    | TYPE OF ENDS            | SPECIFICATION OR | REMARKS                                                |
|                    | inch/mm                                   | BODY                   | TRIM                 | ANSI/IS                                                            |                         | TAG NUMBER       |                                                        |
| GATE GLOBE CHECK   | ≤ 40                                      | BRONZE<br>ASTM B62     | BRONZE<br>ASTM B62   | PN 1.6                                                             | NPT/<br>IS-554<br>TAPER |                  |                                                        |
| GATE (NOTE-4)      | ≥ 50                                      | CHS                    | BRONZE               |                                                                    |                         |                  |                                                        |
| GLOBE (NOTE-4)     | FOR DETAILS REFER INDIVIDUAL DATA SHEETS. |                        |                      |                                                                    |                         |                  |                                                        |
| CHECK              |                                           | CHS 200                | M B62                |                                                                    |                         |                  |                                                        |
| BUTTERFLY (NOTE-5) | ≥ 150                                     | CHS 210 Gr. FG-200     | NITRILE              | PN 1.6                                                             | WAFER                   |                  | SUITABLE FOR INSTALLATION BETWEEN FLANGES OF 150 CLASS |



| ITEM                                                                                                                                       | NOMINAL PIPE SIZE RANGE<br>inch / mm | MATERIAL SPECIFICATION | DIMENSIONAL STANDARD | REMARKS              |    |  |  |
|--------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|------------------------|----------------------|----------------------|----|--|--|
| Y TYPE STRAINERS                                                                                                                           | 50 TO 150                            | IS 1239 PART 1         | SS 304 SCREEN        | ANSI B16.5 150 CLASS | RF |  |  |
|                                                                                                                                            | 200                                  | IS 3589 GRADE FE 410   | SS 304 SCREEN        | ANSI B16.5 150 CLASS | RF |  |  |
|                                                                                                                                            |                                      |                        |                      |                      |    |  |  |
| <b>NOTES</b>                                                                                                                               |                                      |                        |                      |                      |    |  |  |
| 1. Use flat face flanges and full face gaskets with cast iron flanged valves.                                                              |                                      |                        |                      |                      |    |  |  |
| 2. Use flat end covers instead of caps for sizes $\geq 200$ mm.                                                                            |                                      |                        |                      |                      |    |  |  |
| 3. Light weight flanges shall be ring type as per class d of table 1 or hub type as per class d of table 2 of awwa c207.                   |                                      |                        |                      |                      |    |  |  |
| <del>4. For sizes <math>\geq 150</math> mm, butterfly valves shall be used in place of gate and globe valves for services other than</del> |                                      |                        |                      |                      |    |  |  |
| <del>Those covered in note 5.</del>                                                                                                        |                                      |                        |                      |                      |    |  |  |
| 5 butterfly valves shall not be used in fire water reservoir outlet and pump suction line.                                                 |                                      |                        |                      |                      |    |  |  |
| 6. Hydrotest pressure of installed piping: 5.25 kg/cm <sup>2</sup> g.                                                                      |                                      |                        |                      |                      |    |  |  |
| 7. Buried piping shall be coated and wrapped as per data sheets and requirements of TAC.                                                   |                                      |                        |                      |                      |    |  |  |

#### 4.4.10 FIRE WATER PIPING GENERAL REQUIREMENTS

##### DATA SHEET A

|       |                                                             |                  |                                                                    |
|-------|-------------------------------------------------------------|------------------|--------------------------------------------------------------------|
| Scope | 1. Supply of pipes and fittings:                            | Design data      | 8. Piping: as per specification                                    |
|       | Yes                                                         |                  |                                                                    |
|       | 2. Supply of valves and specialities:                       |                  | 9. Welding: as per specification                                   |
|       | yes                                                         |                  | 10. Underground protection:                                        |
|       | 3. Supply of structural steel for                           |                  | as per specification and tac                                       |
|       | pipe supports: yes                                          |                  | 11. Valve chambers: brick masonry/<br>Stone masonry/ree as per drg |
|       | 4. Erection, testing and<br>commissioning of piping system: |                  | *                                                                  |
|       | yes                                                         | and<br>inspectio | 12. As per shop inspection and tests<br>and/or                     |
|       | 5. Excavation and back filling:                             |                  |                                                                    |

|        |                                                                                                                                                          |  |          |
|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------|--|----------|
|        | yes                                                                                                                                                      |  |          |
|        | 6. Valve chambers with covers<br>(whereever necessary):                                                                                                  |  | (note 1) |
|        | No                                                                                                                                                       |  | 13.      |
|        | 7. Painting and corrosion                                                                                                                                |  | 14.      |
|        | protection: yes                                                                                                                                          |  | 15.      |
| Notes: |                                                                                                                                                          |  |          |
| 1.     | Additional tests indicated as 'B' in shops inspection requiremets shall also be carried out when it is applicable.                                       |  |          |
|        | Also be carried out when these are applicable.                                                                                                           |  |          |
| *      | bidder shall submit the drawing and the same shall be revised to incorporate the comments of client / consultant before being released for construction. |  |          |

#### 4.4.11.1. SCOPE

This specification covers the general design, materials, manufacture, shop inspection and testing at manufacturer's works, delivery at site, handling at site, erection, testing, commissioning, performance testing and handing over of fire water piping and accessories.

#### 4.4.11.2. CODES AND STANDARDS

The design, materials, manufacture, erection, inspection, testing and performance of fire water piping and accessories shall comply with all the currently applicable statutes, regulations and safety codes in the locality where it is to be installed. The piping shall also conform to the currently applicable Indian and international codes and standards. Nothing in this specification shall be construed to relieve the CONTRACTOR of this responsibility

#### 4.4.11.3. DESIGN AND GENERAL REQUIREMENTS

- a) All pipes, fittings, flanges, valves and specialities etc. shall conform to the enclosed piping material specifications.
- b) Piping design and layout shall satisfy the requirements of applicable section of ASME B31, Tariff Advisory Committee (TAC), other applicable codes and statutory regulations.
- c) Piping shall be routed to avoid interference. If interference is noticed at site, piping shall be suitably modified and rectified by the CONTRACTOR at no extra cost to the PURCHASER.
- d) All high points in the piping system shall be provided with vents with valves and low points with drains with valves.

- e) Top of buried piping shall not be less than one (1) metre below the ground level. Buried piping shall be provided with underground protection as per the enclosed specification and requirements of TAC. Valves in buried piping shall be provided with valve chambers with covers. At road crossings buried piping shall run through Hume pipes. Diameter of Hume pipes shall be at least equal to two (2) times the diameter of fire water pipe. Hume pipe shall extend at least 300 mm beyond the road.
- f) Supports for above ground piping shall follow good engineering practice, requirements of TAC and statutory regulations. Structural steel for pipe supports and other requirements shall conform to IS 2062 grade A.
- g) For underground piping wherever soil conditions are unsatisfactory, brick masonry or concrete supports shall be provided at regular intervals not exceeding three (3) metres. In case of poor soil conditions, it may be necessary to provide continuous brick masonry or concrete support. The CONTRACTOR shall bring such conditions to the notice of the PURCHASER and follow his instructions.
- h) Effective precautions such as capping or sealing shall be taken to protect ends of all pipes, fittings, valves and specialities against ingress of dirt and damage during transit or storage. Flange gasket contact surfaces shall be suitably protected against damage.
- i) All piping shall be cleaned and purged with air blast to remove all rust, mill scale etc from inner surface. Rotary wire brush may be used for cleaning pipes of sizes above 300 mm. The method of cleaning shall be such that no material is left on the inner surfaces, which may affect the serviceability of the pipe.
- j) The CONTRACTOR'S scope for erection under this contract shall include supply of the following:
  - (i) Welding materials like welding electrodes, filler rods and wires, oxygen, acetylene, propane and other consumable materials and backing rings, etc. as required
  - (ii) Joining material as required for all screwed joints and bolts, nuts, studs, washers and gaskets as required for all flanged joints
  - (iii) Isotopes for gamma ray, equipment and films for radiography, liquid dye penetrant and other required testing materials and equipment. All these shall be taken back by the CONTRACTOR after completion of work.
  - (iv) Erection tools, tackles, scaffolding materials and materials including welding machines, thermocouples, asbestos paper including blankets, cables, temperature recorders and charts and testing equipment, air

compressors etc. All these shall be taken back by the CONTRACTOR after completion of work.

- (v) Services of erection superintendent, erection supervisors, fitters, riggers, and other skilled and unskilled labour.
- k) For general welding requirements refer enclosed specification. The CONTRACTOR shall be responsible for the quality of welding carried out and shall conduct tests to determine the suitability of the welding procedure used. Tests shall be conducted in accordance with codes specified. The results and specimens from qualification tests and operator tests shall be made available to the PURCHASER. Only qualified welders shall be used and the CONTRACTOR shall inform the PURCHASER the names of the welders and their experience for approval. A welding procedure qualification shall be submitted to the PURCHASER for approval before commencement of work.
- l) All surplus materials from those supplied by the CONTRACTOR shall be taken back by the CONTRACTOR.
- m) All pipes and fittings shall be tested hydrostatically at the shops where manufactured, to test pressures which are given in the respective codes and standards. All piping systems shall be tested hydrostatically after erection to specified test pressure. The test duration shall be two (2) hours or until all joints are examined, whichever is longer. In case of leakage, re-test shall be carried out for the same duration after rectification of defects.
- n) At least 10% of all the butt-welded joints on hydrant mains shall be radiographically tested and half of the joints radiographed shall be field joints. Acceptable levels of defects shall be as per the applicable code.
- o) For hydrostatic testing and water flushing, the CONTRACTOR shall furnish necessary tanks, pumps, compressors, other equipment, instruments, piping and supports etc. The PURCHASER may provide water at one point of supply to which the CONTRACTOR'S temporary piping shall be connected. All temporary equipment, piping and supports shall be dismantled and taken back by the CONTRACTOR after completion of testing and flushing operation.

#### 4.4.11.4. EXCAVATION AND BACK FILLING

- a) The CONTRACTOR shall carry out necessary civil works associated with buried piping such as excavation, de-watering, back-filling, levelling and compacting. During excavation, large stones and rubbles shall be segregated and removed from the excavated soil and stacked separately. The material from excavation shall be deposited on either side of the trench leaving adequate clear distance from the edges of the trench. This is necessary to prevent the excavated material

or the sides of the trench to slip and to avoid covering the laid pipes, hydrant valves, sluice valves and manhole covers etc.

- b) All precautions shall be taken during excavation and laying operations to guard against possible damage to any existing structures and pipelines. If rock is encountered, it shall be removed up to 150 mm below the bottom of pipes, fittings, valves and specialties and the space resulting shall be refilled with granular materials and properly consolidated. The excess excavated material shall be carried away from site of works up to a distance as directed by the PURCHASER.
- c) In case, during excavation, sub-soil water is encountered, the CONTRACTOR shall provide necessary equipment and labour for de-watering the trenches. The CONTRACTOR shall also make necessary arrangements for the disposal of drained water to nearby storm water drain. In no case shall water be allowed to spread over the adjoining areas. All precautions shall be taken to prevent dirt etc. from entering into pipes, when the pipe laying is not in progress by closing the pipe ends with water tight plugs or other approved methods. Trenches shall be back-filled with selected excavated material only after the successful testing of the piping. Tamping around the pipe shall be done by hand or other hand-operated mechanical means. Back filling shall be done in layers not exceeding 300 mm. Each layer shall be consolidated by watering and ramming.

#### 4.4.11.5. PAINTING AND CORROSION PROTECTION

- a) All exposed piping shall be painted with approved paints.
- b) Before applying the paints, all surfaces shall be cleaned by sand blasting or rotary wire brushing and by dry air blast. All surfaces shall be free of all dirt, mud, rust, grease, scale, or other foreign material.
- c) After sand blasting or wire brushing is complete, the surfaces shall be protected so that these do not come in contact with grease, oil, other organic matter or moisture prior to application of primer coating.
- d) Primer coating shall be carried out as quickly as possible after sand blasting or wire brushing. No sand blasted or wire-brushed surface shall be allowed to remain un-coated overnight. Any clean surface that subsequently rusts shall be re-blasted or re- wire brushed before the application of primer.
- e) Painting operation shall generally be in line with IS 1477 (Parts 1 and 2) and colour of finish paint shall be fire red shade no. 536 of IS 5.

#### 4.4.11.6. MEASUREMENTS

- a) Above ground and underground pipe lengths shall be measured separately. Pipe length shall be measured along the centre line of the pipe. End-to-end or flange

face-to-flange face length of fittings, flanges, valves and specialities shall not be deducted from the pipe length. Unit price for supply of pipe shall include supply of fittings and flanges. Similarly, unit price for erection of pipe shall include erection of fittings and flanges. However, supply and erection of valves and specialities shall be considered separately as per para 6.6 below.


- b) Unit prices for supply and erection of above ground and underground pipes shall also include supply and erection of all piping support items, auxiliary steel and accessories like shoes, saddles, base plates, clamps, bolts and nuts etc.
- c) Unit prices for supply and erection of above ground pipes shall also include supply of all surface preparation and painting materials and application of painting.
- d) Unit prices for supply and erection of underground pipes shall also include supply of all surface preparation and wrapping and coating materials required and application of underground protection.
- e) For valves and specialities the BIDDER shall quote unit price for supply and unit price for erection of each type and size of valve and speciality.
- f) Non-destructive testing like radiography and die penetrant tests etc. shall be included in the unit price for erection of pipe. No separate charges are payable on this account.
- g) For concrete pedestals for support of above ground pipes, the BIDDER shall quote unit price for erection of each type and size of pedestal. Supply of all materials required for construction of such pedestals shall be included in the unit price.
- h) For valve chambers for underground pipes, the BIDDER shall quote unit price for erection. Supply of all materials required for construction of such valve chambers, shall be included in the unit price.
- i) For excavation and backfilling, the bidder shall quote unit price per M3 for each type of soil indicated in the schedule of prices. Payment shall be made based on the volume arrived at, as given below, irrespective of the width and depth of the trench actually excavated or larger trench excavated at locations of pipe fittings and flanges and locations of weld joints:

$$V = L (D_1 + D_2 + \dots + 0.5) (1.2 + D_1 \text{ or } D_2 \dots \text{ whichever is higher}) \text{ Where,}$$

$D_1, D_2 \dots \text{etc}$  : Nominal diameters of pipes buried in the same trench in

$M L$  : Length of trench in M

$V$  : Volume of trench in M3

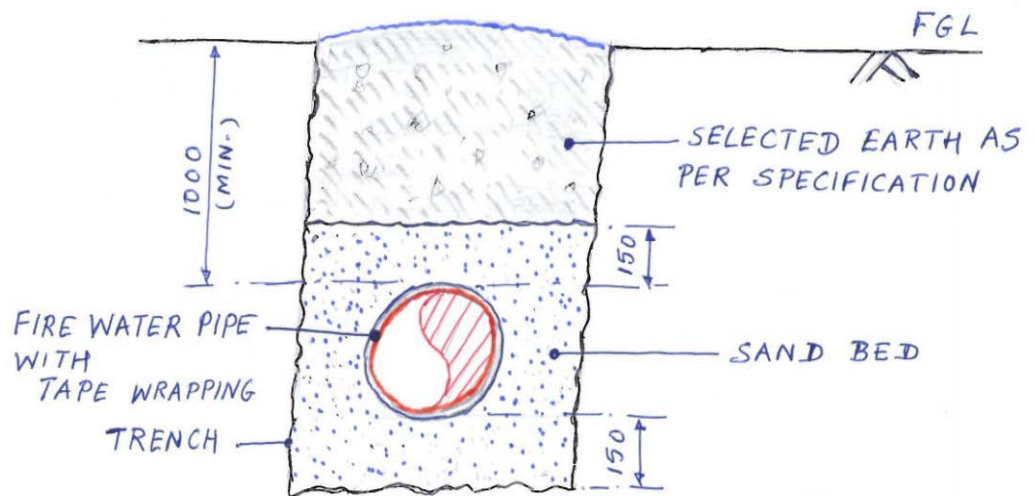

#### 4.4.11 FIRE PROTECTION SYSTEM WELDING REQUIREMENTS FOR PIPING

| Sl. No.      | Material                                                                                                     | P. No. | Welding process |        | Filler material |        | Gas                                     |                                      | Notes |
|--------------|--------------------------------------------------------------------------------------------------------------|--------|-----------------|--------|-----------------|--------|-----------------------------------------|--------------------------------------|-------|
|              |                                                                                                              |        | Root            | Filler | Root            | Filler | Purging                                 | Shielding                            |       |
| 1.0          | Carbon steel                                                                                                 |        |                 |        |                 |        |                                         |                                      |       |
| 1.1          | ≤ 50 mm NPS and/or up to and including 3 mm thick                                                            | 1      | GTA W           | GTA W  | E R70 S2        | E 6013 | --                                      | --                                   | 1     |
| 1.2          | > 50 mm NPS                                                                                                  | 1      | SMA W           | SMA W  | E 6010          | E 6013 | --                                      | --                                   | 1     |
| 2.0          | Stainless steel type 304                                                                                     | 8      | GTA W           | GTA W  | ER 308          | ER 308 | NITRO GEN 0.2 TO 0.3 M <sup>3</sup> /HR | ARGON 0.35 TO 0.6 M <sup>3</sup> /HR | 2     |
| <b>Notes</b> |                                                                                                              |        |                 |        |                 |        |                                         |                                      |       |
| 1.           | For fillet welds, E 6013 may be used.                                                                        |        |                 |        |                 |        |                                         |                                      |       |
| 2.           | Non-consumable electrode for gtaw process shall be 2% thoriated tungsten.                                    |        |                 |        |                 |        |                                         |                                      |       |
| 3.           | Electrodes and filler wires shall be from reputed manufacturers such as advani-oerlikon, esab, d&h secheron. |        |                 |        |                 |        |                                         |                                      |       |

| Legend |   |                            |
|--------|---|----------------------------|
| Gtaw   | - | Gas tungsten arc welding   |
| Smaw   | - | Shielded metal arc welding |
|        |   |                            |

#### 4.4.12 FIRE UNDERGROUND PROTECTION FOR PIPING

(DATA SHEET A)

|                       |     |                                                  |                                                                                                                                                |
|-----------------------|-----|--------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| General and materials | 1.  | Supply of all coating and Wrapping materials     | By contractor/ purchaser                                                                                                                       |
|                       | 2.  | Soil resistivity                                 | $\leq 1000 \text{ ohm-cm}$<br>$> 1000 \text{ ohm-cm}$                                                                                          |
|                       | 3.  | Type of underground protection                   | 3.1 <del>3 coats and 3 wraps of coal tar coating / 3 layers of wrapping tape</del>                                                             |
|                       |     |                                                  | 3.2 <del>2 coats and 2 wraps of coal tar coating / 2 layers of wrapping tape</del> / 1 layer of 4 mm thick wrapping tape                       |
|                       | 4.  |                                                  |                                                                                                                                                |
|                       | 5.  | Application methodology                          | As per specification                                                                                                                           |
|                       | 6.  |                                                  |                                                                                                                                                |
|                       |     |                                                  |                                                                                                                                                |
|                       |     |                                                  |                                                                                                                                                |
|                       |     |                                                  |                                                                                                                                                |
| Testing               | 7.  | Coating thickness                                | Required                                                                                                                                       |
|                       | 8.  | Bond/ adhesion test for coating / Wrapping tapes | Required                                                                                                                                       |
|                       | 9.  | Holiday test                                     | Required                                                                                                                                       |
|                       |     |                                                  |                                                                                                                                                |
| Documents             | 10. | Documents required after the Award of contract   | 10.1 material test certificates<br>10.2 manufacturer's installation instructions for storage, preparation and application of coating materials |
|                       |     |                                                  |                                                                                                                                                |
|                       |     |                                                  |                                                                                                                                                |
|                       |     |                                                  |                                                                                                                                                |

##### 4.4.13.1. SCOPE

The purpose of this specification is to describe the technical requirements for the application of hot coal-tar enamel and fibre glass wrapping or pipeline wrapping tapes for the protection of external surface of underground carbon steel piping.



#### 4.4.13.2. GENERAL

- a) The coating shall consist of coal-tar enamel, inner wrap of fibre glass, final outer wrap of enamel-impregnated fibre or enamel-impregnated kraft paper. The primer and the enamel shall be from the same supplier.
- b) Alternatively, if specified in Data Sheet-A, ready-made tapes available for underground protection shall be used. Tape shall be of approved make. The CONTRACTOR shall furnish all the technical information, experience details etc. of the tapes proposed to be used for review.
- c) The two ends of each length of pipe shall be left bare of primer coating and wrapping for a distance of 150 mm from the end to facilitate field welding and subsequent field coating or wrapping.
- d) The supply, application, characteristics of materials and testing requirements shall be strictly as per IS 10221.
- e) Type of coating system based upon the soil resistivity may be selected on the following basis :

| Soil resistivity   | Corrosively               | Coal tar coatings   | Wrapping tap     |
|--------------------|---------------------------|---------------------|------------------|
| $\leq 1000$ ohm-cm | Extremely corrosive       | 3 coats and 3 wraps | 3 layers of taps |
| $> 1000$ ohm-cm    | Corrosive & non Corrosive | 3 coats and 3 wraps | 3 layers of taps |

- (a) If no specific choice is indicated in Data Sheet-A, system 2.5(b) using coal tar coating shall be used.

#### 4.4.13.3. SURFACE PREPARATION

Pipe surfaces to be provided with underground protection shall be cleaned by shot or sand blasting. The cleaning shall be so carried out that the piping surface is free from mill scale, rust, oil, welding scale and other foreign materials. Primer shall be applied immediately after shot or sand blasting to prevent rust forming. Superficial rust formed shall be removed by wire brushing or by the use of emery paper. If the rust formation is heavy, re-blasting may be necessary. Around field joints, the pipe surfaces may be cleaned by wire brushing prior to the application of anti-corrosive protection.

#### 4.4.13.4. PRIMER COAT

- a) The primer shall be compatible with the grade of enamel used. It shall be thoroughly mixed before using by stirring or by rocking the drum to provide uniformity of material. The primer coat shall be applied over a thoroughly

clean and dry surface within three (3) hours of the cleaning operation, and shall be applied preferably immediately with a uniform thickness on the entire surface of the piping using appropriate quantity per unit area of surface as recommended by the manufacturer. The primer coating shall be free of bubbles, globules, drips and runs. Pipes having a longitudinal seam shall be carefully examined to determine that all excess primer has been brushed out of each side of the welding seam. The primer shall be thoroughly dry before the enamel is applied. If ready-made tapes are used, then primer, as suggested by the manufacturer, shall be used.

- b) Freshly-primed pipe shall be handled carefully to prevent damage. The damaged area shall be re-primed before applying enamel/wrapping tapes.

#### 4.4.13.5. ENAMEL AND WRAPPING MATERIALS FOR COAL TAR ENAMEL APPLICATION

- a) The material to be used for coating and wrapping shall be coal-tar enamel, fibre glass inner wrap, fibre glass or kraft paper outer wrap, all as per IS 10221.
- b) Well-experienced personnel shall be placed in charge of coating and wrapping operations. They shall strictly follow the manufacturer's instructions regarding recommended temperature in the heating kettles and the temperature at which the hot coating is applied to the pipe. Clean dry enamel in lumps not exceeding 35 kg in weight shall be heated slowly in clean kettles to the recommended temperature, and after reaching the required temperature, the heating flame shall be controlled to prevent over-heating. Any enamel heated in excess of manufacturer's specifications shall be discarded. Only batch heating of enamel shall be permitted.
- c) Kettles shall be completely emptied of one batch and cleaned, if necessary, before preparing the next batch of enamel. The enamel shall be stirred continuously with metal agitators. Enamel kettles shall be equipped with indicating or recording thermometers having temperature range from 100 to 350°C. Enamel withdrawn from the kettles shall be strained through a 1.5 mm strainer.
- d) Enamel shall be moisture - and dirt-free at all times prior to and at the time of heating and application. The primed surface shall be dry and clean at all times and the enamel shall be applied not later than three (3) days after the application of primer. Along with the first coat of enamel, a single spiral inner wrap of fibre glass shall be applied overlapping at least 20 mm on pipes upto 250 mm diameter and 25 mm on larger diameter pipes. It shall be ensured that fibre glass impregnates in the first coat. The second coat of enamel and the second outer wrap of enamel-impregnated fibre glass or enamel-impregnated

kraft paper shall be applied in the same way and shall conform to Table-10 or 12 of IS 10221. The total thickness of the coating shall not be less than 2.5 mm.

- e) A third coat of enamel and wrapping shall be applied wherever soil resistivity is below 1000 ohm-cm (extremely corrosive).
- f) During cold weather, when the pipe surface temperature is below 7°C or during rainy and foggy weather when moisture tends to collect on the cold pipe, enamelling shall be preceded by warming of the primed pipe. Warming shall be done by any method that will heat the pipe uniformly to the recommended temperature without damage to the primer. Temperature of the pipe shall not exceed 70°C.
- g) Each end of the pipe left bare for welding purpose shall be hand-coated and wrapped after completion of field welding and satisfactory hydrotesting of pipe.

#### 4.4.13.6. APPLICATIONN OF WRAPPING TAPES

- a) After the surface preparation as per para 3.0, the primer shall be applied by brush or spay so as to give a coating thickness is between 2 and 4 mils when wet. The primer shall be allowed to dry to the touch prior to tape application. Primer and tape shall be furnished by the same manufacturer. If application is done in cold weather, the surface of the pipe shall be preheated until it is warm to the touch, and until all traces of moisture are removed and then the primer shall be applied and allowed to dry.
- b) The tape shall be wrapped strictly in accordance with the manufacturer's recommendations in a manner that shall meet the adhesion and holiday detection requirements of IS 10221. There shall be a minimum overlap of 12 mm per single wrap. Each layer of tape shall be of 2 mm thickness.

#### 4.4.13.7. TESTING

##### a) THICKNESS

- i. The thickness of the pipe coating shall be measured either by elcometer or by coating thickness gauge.

##### b) BOND

- i. Bond test shall be carried out by cutting 25 mm square at three locations of the coating on a sample test specimen to qualify the procedure. Coating shall be pulled out by lifting one corner of the square. For a good coating, the section shall not peel off easily.

- ii. The coating on the pipe shall be carried out only after satisfactory completion of the qualifying test.
- iii. In case of doubt regarding the quality of coating, bond test shall be carried out on any location of the pipe to the satisfaction of the PURCHASER. The tests indicated under clauses 7.1 and 7.2 are applicable for coal tar enamel applications only.

#### c) FIELD ADHESION TEST FOR WRAPPING TAPES

- i. Adhesion test shall be made to determine the proper bond between the tape and primed pipe. The temperature of the tape and pipe to be tested shall be between 10 and 27 °C. If the temperature is outside this range, hot or cold water shall be poured over the test area until this temperature range is attained. A test area shall be selected by the inspector where the tape is smooth for 15 cm in the longitudinal direction of the tape. Two knife cuts that are 15 cm long and 5 cm apart shall be made through the tape. A flat blade shall be used to pry up 5 cm of the fabric. This 5 cm flap of fabric shall be grasped firmly in one hand and shall be pulled with a quick motion in the direction of the remaining 10 cm of the 15 cm knife cut.
- ii. The adhesion is satisfactory if the tape tears at the point of stripping or the fabric strips from the underlying coal tar component, leaving exposed not more than 10% of the primer or metal.

#### d) HOLIDAY TEST

- i. On completion of coating/wrapping, the quality of the coating shall be tested using efficient high voltage holiday detectors, operating at a voltage high enough to jump an air gap, the length of which is equal to the thickness of the coating/wrapping. All holidays found shall be repaired and the repairs shall be retested with the holiday detector to ensure that adequate repairs have been made.
- ii. The suggested test voltage shall be as follows :
 

|   |   |                                               |
|---|---|-----------------------------------------------|
| V | = | 1250 (t) <sup>1/2</sup> where                 |
| V | = | voltage, in volts                             |
| t | = | coating thickness in mils (1 mil = 0.001 in.) |

#### e) CERTIFICATES

The CONTRACTOR shall furnish certificates of all the materials purchased by him and also complete instructions from the manufacturer regarding the storage, preparation and application of the coating materials.

#### **4.4.13 WELDING SPECIFICATION FOR SHOP AND SITE FABRICATED EQUIPMENT**

##### **4.4.15.1. SCOPE**

- a) This specification shall apply to shop and site fabrication of all welded joints in carbon steel, low alloy steel and stainless steel equipment like pressure vessels, tanks, columns and heat exchangers etc. The specification shall apply to all the joints indicated below:
  - i. Butt joints produced by double sided welding which produce the same quality of deposited weld metal on both inside and outside weld surfaces
  - ii. Butt joints produced by single sided welding having backing strip which remains in place and full penetration butt weld without backing strip
  - iii. Corner or those joints connecting two (2) members approximately at right angles to each other in the form of L or T
  - iv. Partial penetration welds of the groove type which are used for connections not subjected to external loading
  - v. Fillet welded joints of approximately triangular cross-section joining two (2) surfaces at approximately right angles to each other and having a throat dimension at least 70% of the thinner of the parts being joined but not less than 6 mm
  - vi. Welds attaching nozzles and other connections
  - vii. Welds which are used to join non-pressure parts like supports, lugs, brackets, stiffeners and other attachments to the vessel wall
  - viii. Any other similar joint which is not specified above but may be encountered during fabrication

##### **4.4.15.2. CODES AND STANDARDS**

- a) The welding equipment, welding consumables, preheating, Post weld Heat Treatment (PWHT), other auxiliary functions and welding personnel shall comply with all currently applicable statutes, regulations and safety codes in the locality where the equipment are to be fabricated and installed. Nothing in this specification shall be construed to relieve the

VENDOR/CONTRACTOR of this responsibility. Specifically, the latest editions of the codes and standards listed below shall apply:

- i. ASME Boiler and Pressure Vessel Code (BPV Code), Section II Part C - Material Specifications for Welding Rods, Electrodes, and Filler Metals
  - ii. ASME BPV Code, Section V - Non-destructive Examination (NDE)
  - iii. ASME BPV Code, Section VIII Division 1- Rules for Construction of
  - iv. Pressure Vessels
  - v. ASME BPV Code, Section IX - Welding and Brazing Qualifications
  - vi. American Society of Non-destructive Testing (ASNT) SNT-TC-IA- Recommended Practice
  - vii. Indian Boiler Regulations (IBR)
  - viii. Any other codes and standards specified in Specification or data sheet A of  
Data sheet of enquiry specification
- b) The codes and standards listed in para 2.1 forms an integral part of this specification. In the event of conflict between this specification and the codes and standards, the more stringent shall govern.
  - c) If no specific requirements are given in this specification, the requirements of the applicable code shall govern.

#### 4.4.15.3. WELDING PROCESSES

- a) GAS TUNGSTEN ARC WELDING (GTAW)
  - i. The root pass of single-sided groove welds without backing
  - ii. Full penetration nozzle connection where other side is inaccessible
  - iii. Any butt and fillet weld on equipment with thickness 5 mm or less
  - iv. For all passes of butt and fillet welding of nozzles on equipment and integral piping of size 50 mm NB or smaller
- b) Shielded Metal-Arc Welding (SMAW)
- c) SUBMERGED ARC WELDING (SAW)

Maximum weld deposit per pass shall be 12.7 mm for carbon steel (P-1) and 9.5 mm for other materials.

- d) Gas Metal Arc Welding (GMAW) and Flux Cored Arc Welding (FCAW) processes
- e) Other processes such as plasma-arc and electro-slag welding may be used only with the approval of the PURCHASER and depending upon the process and application proposed. These processes may require testing in addition to that specified by the governing procedure qualification code.
- f) Table 1 gives recommendations for welding processes to be used for carbon, low alloy and austenitic stainless steels.

#### 4.4.15.4. WELDING CONSUMABLES

- a) The VENDOR/CONTRACTOR shall provide, at no additional cost, all the welding consumables such as electrodes, filler wires, flux, oxygen, acetylene and argon etc., in order to complete the welding in all respects. The consumables shall be from reputed and approved manufacturers. All the consumables shall be approved by the PURCHASER.
- b) The electrodes and filler wires shall be of the class specified in Table 1 Welding Specification Chart.
- c) Electrode qualification test records shall be submitted for the PURCHASER's approval. The VENDOR/CONTRACTOR shall also submit batch test certificates from the electrode manufacturer for physical and chemical tests.
- d) Electrodes shall be in sealed containers and adequate care shall be taken for storage, strictly in accordance with the manufacturer's recommendations.
- e) Electrodes, which have been removed from the original containers, shall be kept in baking ovens as per the manufacturer's recommendations and, once these are taken out, shall be consumed within the time limits stipulated by the manufacturer. Care shall be taken in handling the electrodes to prevent any damage to the flux covering. Portable ovens shall be used for carrying the electrodes from the main oven to the field. Electrodes of different specifications shall be stored in different compartments of a baking oven to avoid mix up.
- f) The electrodes, filler wires and flux used shall be free from contamination such as rust, oil, grease and such foreign matter.
- g) Low hydrogen electrodes shall be used for weld joints in carbon steel if the wall thickness exceeds 19 mm and low alloy steel of all thicknesses except

that non- low hydrogen electrodes shall be permitted for the root pass of carbon steel only.

- h) If ultimate tensile strength of base material permits, E 6010 electrodes may be used, for root pass of butt welds and for fillet welds, in carbon steel.

#### 4.4.15.5. WELDING QUALIFICATIONS

- a) Qualification of the welding procedures to be used and the performance of welders and welding operators shall conform to the requirements of the BPV Codes and Section IX. For equipment under the purview of IBR, these shall also meet the requirements of IBR.
- b) No production welds shall be undertaken until the qualification requirements are completed to the satisfaction of the PURCHASER.
- c) When impact testing is required by the code or by the specification, these requirements shall be met in qualifying welding procedures.
- d) The VENDOR/CONTRACTOR shall be responsible for qualifying any welding procedure, welders and welding operators intended to be deployed. The VENDOR/CONTRACTOR shall submit the Welding Procedure Specification (WPS) for acceptance by the PURCHASER. After approval by the PURCHASER, the procedure qualification test shall be carried out by the VENDOR/CONTRACTOR, at his own expense, duly witnessed by the PURCHASER. A complete set of test results, in specified format, shall be submitted to the PURCHASER for approval immediately after successful
- e) completion of procedure qualification test. All tests as required by the BPV code Section IX or IBR shall be carried out. The WPS shall require re-qualification, if any of the essential variables or supplementary variables is altered.
- f) Welders and welding operators shall be qualified in accordance with BPV Code and Section IX or IBR, as applicable. The qualification shall be carried out in the presence of the PURCHASER. Only those welders and welding operators who are qualified by the PURCHASER shall be deployed on the job. For equipment under the purview of IBR, approval of the local IBR inspector shall be obtained by the VENDOR/CONTRACTOR.
- g) Welders and welding operators shall always keep their identification cards with them and shall produce them on demand. The VENDOR/CONTRACTOR shall issue the identity cards after the same are duly certified by the PURCHASER. Welder or welding operator, who is not in possession of the identity card, shall not be allowed to work.



- h) The VENDOR/CONTRACTOR shall use forms as per BPV code, section IX, form QW-482, form QW-483 and form QW-484. Other forms are also acceptable subject to approval by the PURCHASER.
- i) Unless agreed otherwise, the VENDOR/CONTRACTOR shall advise the PURCHASER, in writing, at least three (3) weeks before any welder or welding operator is deployed on the work, the names and qualifications of the proposed welders, welding operators and welding supervisors. It shall be the VENDOR/CONTRACTOR's responsibility to ensure that all welders and welding operators employed by him or his SUB-VENDORS/SUB-CONTRACTORS, on any part of the work either in the VENDOR/CONTRACTOR's or his SUB-VENDOR/SUB-CONTRACTOR's works or at site are fully qualified as required by the code. Each welder and welding operator shall qualify for all types of welds, positions and materials or material combinations he may be called upon to weld.
- j) Should the PURCHASER require to qualify or requalify any welder or welding operator, the VENDOR/ CONTRACTOR shall make available, at no extra cost to the PURCHASER the men, equipment and materials for the tests. The cost of testing the welds shall be borne by the VENDOR/CONTRACTOR.
- k) Welding supervisors shall have qualifications such as engineering degree or engineering diploma in welding technology with adequate knowledge of welding consumables, welding machines, NDE and a minimum of five (5) years of experience in supervising welding of joints.
- l) All welding, including the tacking up of all welds shall be carried out by qualified welders and welding operators as per approved WPS. Any weld made by other than a qualified welder or welding operator or not carried out as per approved WPS shall be cut out and re-welded.
- m) For purposes of identification and to enable tracing full history of each joint, each welder and welding operator employed on the work shall be given a designation. The welder and welding operator's designation and the date on which the joint was made, shall be stamped near the relevant joint and on the relevant drawings also. Copies of the drawings so marked shall be furnished to the PURCHASER for record purposes. For austenitic stainless steels, welder and welding operator's designation shall be applied with water-proof paint or by etching or stencilling machine that is not detrimental to the metal. Alternatively, record cards may be used.

- n) For each welder and welding operator, a record card shall be maintained showing the procedures for which he is qualified. These cards shall note the production welds, the date of the welding done, the type of defects produced and their frequency. The record shall be reviewed once in a week by the PURCHASER and those welders and welding operators whose work required a disproportionate amount of repair shall be disqualified from welding. Re-qualification of welders and welding operators disqualified more than three (3) times shall be entirely at the discretion of the PURCHASER. As far as possible, the qualification shall be carried out at the location (site or shop) where the actual fabrication and welding work is to be carried out.

#### 4.4.15.6. PREPARATION FOR WELDING

- a) Surfaces to be welded shall be smooth, uniform and free from fins, tears and other defects, which would adversely affect the quality of the weld. All welding faces and adjoining surfaces, for a distance of at least 50 mm from the edge of the welding groove or 12 mm from the toe of the fillet in the case of socket welded or fillet welded joints, shall be thoroughly cleaned of rust, scale, paint, oil or grease, both inside and outside.
- b) Joints for welding shall be as per the project specifications and approved fabrication drawings.
- c) Butt joints shall be prepared as per ASME BPV Code Section VIII Division 1, unless specified otherwise. For equipment under the purview of IBR, these shall be as per IBR. Any other end preparation which meets the WPS is acceptable.
- d) Internal misalignment shall be reduced by trimming but such trimming shall not reduce the finished wall thickness below the required minimum wall thickness. Trimming shall not be abrupt. It shall be tapered with a minimum slope of 1:3. Root opening of the joint shall be within the tolerance limits of the WPS.
- e) Welds shall be as per ASME BPV Code Section VIII Division 1 or in accordance with IBR for equipment under the purview of IBR.
- f) Reinforcing pads and saddles shall have a good fit with the parts to which they are attached. A tell-tale hole shall be provided on the side of any pad or saddle to reveal leakage in the weld and to allow venting during welding and heat treatment. Pad or saddle shall be added, after the branch weld has undergone satisfactory visual and NDE.
- g) The ends shall be prepared by machining, grinding, flame cutting or plasma cutting. Where flame cutting is used, the effect on the

mechanical and metallurgical properties of the base metal shall be taken into consideration Flame cutting of alloy steel is not advisable. If alloy steel is cut using flame, the heat affected zone shall be removed completely by grinding and/or machining Magnetic Particle (MT) or Liquid Penetrant (PT) testing shall be carried out to ensure soundness of edges. However, flame cutting of carbon steel is permitted. Wherever practicable, flame cutting shall be carried out by machine. Machine flame-cut edges shall be substantially as smooth and regular as those produced by edge planning and shall be cleaned free of slag. Manual flame cutting shall be permitted only where machine flame cutting is not practicable and with the approval of the PURCHASER, and such surfaces shall be ground or dressed to a smooth finish as required by the specification and to the satisfaction of the PURCHASER. Slag, scale or oxides shall be removed by grinding to bright metal at least two (2) mm beyond the burnt area.

- h) Thermal cutting of carbon steel shall be performed under the same conditions of preheating and PWHT as for the welding of each class of material. However, PWHT is not required when:
  - i. The heat affected zone produced by thermal cutting is removed by mechanical means immediately after cutting. However, in any case, all remaining slag, scale or oxides shall be removed by grinding to bright metal at least two (2) mm beyond the burnt area, or
  - ii. Thermal cutting is part of fabrication, manufacturing or erection sequence leading to a weld end preparation where welding immediately follows.
- i) On austenitic stainless steels, plasma cutting, machining or grinding methods shall be used for edge preparation. Flame cutting is not permissible. Cut surfaces shall be machined or ground smooth after plasma cutting. Stainless steel materials shall be ground with Al<sub>2</sub>O<sub>3</sub> grinding wheels and cleaned with stainless steel wire brushes.
- j) Before fitting up the weld joint, the profile and dimensions of the weld end preparation shall be checked by the PURCHASER. If the specified tolerances are exceeded, this shall be corrected (with prior approval) by grinding, machining or any other method acceptable to the PURCHASER.
- k) Fit-ups shall be examined by the PURCHASER prior to welding the root pass.

#### 4.4.15.7. TECHNIQUE AND WORKMANSHIP

- a) Stainless steel welding shall be carried out at a location away from carbon steel welding.

- b) Components to be welded shall be aligned and spaced as per the requirements of the code and WPS.
- c) Alignment and spacing shall be achieved using suitable wires to maintain the gap. These shall be removed after tack welding. The ends to be welded shall be held using suitable clamps, yokes or other devices which will not damage the surfaces in any manner. It shall be ensured that welding operations do not result in distortions.
- d) Earthing shall be provided on the job using earthing clamps of similar material as the job. Earthing shall not be given through welding rotators.
- e) Tack welds at the root joint, for maintaining joint alignment, shall be made only by qualified welders or welding operators and with filler metal equivalent to that used in the root pass. Tack welds shall be fused with the root pass weld, except that those which have cracked shall be removed. Peening is prohibited on the root and final passes of a weld. The required preheat shall be maintained prior to tack welding. Means shall be made available to measure preheat temperature.
- f) No welding shall be carried out if there is any impingement in the weld area of rain, snow, excessive wind or if the weld area is wet.
- g) Irrespective of the class of steel, root runs shall be made without interruption other than for changing the electrodes or to allow the welder or welding operator to reposition him. Root runs made in the shop may afterwards be allowed to cool by taking suitable precautions to ensure slow cooling e.g. by wrapping in a dry asbestos blanket. Welds made at site shall not be allowed to cool until the thickness of weld metal deposited exceeds one third of the final weld thickness or 10 mm, whichever is greater.
- h) When welding alloy steels, it is strongly recommended that interruption of welding be avoided. Where such interruption is unavoidable, either the preheat shall be maintained during the interruption or the joint shall be post heated or wrapped in dry asbestos blankets to ensure slow cooling. Before recommencing welding, preheat shall be applied again.
- i) Welded-on bridge pieces and temporary attachments shall preferably be avoided. Where approved by the PURCHASER, these may be used. Material of these shall be compatible with material with which they are temporarily welded. All such pieces shall be removed after welding of joints and the weld area ground flush. These areas shall be subjected to MT and PT examination. These pieces shall be welded by qualified welders and welding operators and with electrodes compatible with the parent material. The preheating requirements of material shall be applied and maintained

during the welding of attachments. These temporary attachments shall be removed by grinding, chipping, sawing or by arc or flame gouging. When arc or flame gouging is used, at least three (3) mm of metal shall be left around the surface which shall be removed by grinding. This metal shall not be removed by hammering or by use of force.

- j) The arc shall be struck only on those parts of parent metal where weld metal is to be deposited. When inadvertent arc-strikes are made on the base metal surfaces outside the joint groove, the arc-strikes shall be removed by grinding and shall be examined by MT and PT procedures.
- k) Oxides shall not be permitted to form during welding or heat treatment or both, on the internal surfaces which will not be subsequently cleaned. Inert gas purging is an acceptable method to prevent such oxidation. All joints in materials which contain more than 1¼ % chromium shall be purged to assure that less than 1% of oxygen is present on the joint underside before initiation of the welding. The purging operation shall be maintained for a minimum of two (2) passes.
- l) Argon gas used in GTAW process for shielding and purging shall be at least 99.95% pure. Purging shall be carried out at a flow rate depending on diameter until at least five (5) times the volume between dams is displaced. In no case shall the initial purging period be less than 10 minutes. After initial purging, the flow of the backing gas shall be reduced to a point where only a slight positive pressure prevails. Any dams used in purging shall be fully identified and removed after welding and accounted for in order to avoid leaving them in the system. The rate of flow for shielding purposes shall be established in the procedure qualification.
- m) Thorough check shall be exercised to maintain the required inter-pass temperature.
- n) All equipment necessary to carry out the welding, for supporting of the work, for preheating and PWHT including thermal insulation for retaining the heat and for the protection of the welder and welding operator shall be provided by the VENDOR/CONTRACTOR at no extra cost. All necessary precautions shall be taken during cutting and welding operations. It shall be ensured that proper ventilation is available in the welding area and adequate protective gear such as goggles, masks, gloves, protection for the ears and body are used at all times. For guidelines refer ASME standard Z49.1, "Safety in Welding and Cutting".
- o) After deposition, each layer of weld metal shall be cleaned with a wire brush to remove all slag, scale and defects, to prepare for the proper deposition of

the next layer. The material of wire brush shall be compatible with parent material. Stainless steel materials shall be cleaned with grinding wheels or stainless steel brushes which have not been used on other materials. Either aluminium oxide or silicon carbide grinding wheels shall be used. Special care shall be taken to secure complete and thorough penetration of the fusion zone into the bottom of the weld. It is recommended that the root run be checked by MT or PT procedures for critical equipment.

- p) If specified, upon completion of welding, the joints shall be wrapped in dry asbestos blankets to ensure slow cooling, unless PWHT is applied immediately.
- q) No welding or welded parts shall be painted, plated, galvanised or heat treated until inspected and approved by the PURCHASER. Welds shall be prepared and ground in such a way that the weld surfaces merge smoothly into the base metal surface, particularly for welds which are to undergo NDE.
- r) Except where necessary to grind flush for NDE, reinforcement for butt welds may be provided. The height of such reinforcement shall meet the requirements of the code. The reinforcement shall be crowned at the centre and tapered on each side of the joined members. The exposed surface of the weld shall be ground where required to present a workmanlike appearance and shall be free from depressions below the surface of the joined members. The exposed surface of the butt welds shall be free from undercuts, overlaps or abrupt ridges or valleys and shall merge smoothly into the surface at the weld toe.
- s) Repair of weld metal defects shall meet the requirements of the code.
- t) Any weld repair shall be subject to the approval of the PURCHASER.
- u) In the event of several unsuccessful repair attempts or if the PURCHASER feels that a satisfactory repair is not feasible, the joint shall be completely remade.
- v) It is preferable to use welding rectifier or DC generator for welding of austenitic steels and while using low hydrogen electrodes.
- w) IDENTIFICATION OF WELDS

Wherever code symbol stamps are required on carbon steel and ferritic alloy steel they shall be applied directly on to the member with low stress dotted design metal die stamps or to a small stainless steel plate especially provided for such marks. These plates shall be lightly tack welded using electrodes, of diameter three (3) mm or less, of the type specified for the material. Before making the required tack weld, the material

in the immediate surrounding area shall be preheated, as required, by electric means or propane or natural gas burners. Cooling shall take place under asbestos insulation in a draft-free area. Stress relieving of these welds is not required. Steel stamping directly on the surface of alloy steel with other than low stress die stamps shall not be used.

x) SEAL WELDS

- i. Seal welding shall be carried out by qualified welders and welding operators and in accordance with approved drawings.
- ii. Threaded joints that are to be seal welded shall be made without the use of thread lubricating compound. Seal weld shall cover all exposed threads.

y) WELD ENCROACHMENT AND MINIMUM DISTANCE BETWEEN WELDS

- i. Welded joints, more specifically longitudinal welds, shall be placed not closer than 50 mm to opening or branch welds, reinforcements, attachment devices or from supports etc. In case of deviation, the PURCHASER may specify additional NDE.

4.4.15.8. The longitudinal welds of two adjacent components shall be staggered by at least 300. The minimum distance between welds shall be 50 mm or three (3) times the wall thickness, whichever is greater. Intersection of welds shall be avoided as far as possible. If such welds are present, they shall be subject to suitable NDE at the discretion of the PURCHASER.

4.4.15.9. PREHEATING

- a) Preheating prior to tack welding, welding and thermal cutting shall be used as a means of crack prevention and improving weld reliability. The general requirements of PWHT also apply to preheating.
- b) Preheating shall be used as per the recommendations of ASME BPV Code Section VIII Division 1. For equipment under the purview of IBR, the requirements of IBR shall govern. Preheating of austenitic stainless steels is not required, except at low ambient temperatures, in which case a minimum preheat temperature of 100°C is recommended. Table 2 gives the requirements of preheating for commonly used materials
- c) The preheating zone shall extend 75 mm or a distance equal to four (4) times the material thickness, whichever is greater, beyond the edge of the weld.
- d) The preheat temperature shall be measured at least 75 mm away from the weld preparation.

- e) Where preheating is specified, welding shall continue without interruption. In case interruption cannot be avoided, preheating shall be carried out before re- commencement of welding.
- f) Oxy-acetylene preheating shall not be applied.
- g) For preheating, fuel gas/air torches, burner systems (high velocity gas or oil burners) or electrical heating may be used either locally or in a furnace. For preheating above 250oC, electric heating (resistance or inductive heating) is recommended.
- h) Approved temperature - indicating crayons, thermocouples or digital contact or laser pyrometers shall be used to measure preheat and inter-pass temperatures. A calibration report of the pyrometers and thermocouples shall be available.
- i) When the preheat temperature is 150oC or higher, the metal shall be maintained at or above the preheat temperature until the weld is completed.
- j) The welding of groove welds in low alloy steels of P-3 to P-5 groups with wall thickness of 19 mm or greater may only be interrupted, provided at least 10 mm of weld metal is deposited, or 25% of the welding groove is filled, whichever is greater. If the welding is interrupted prior to the above, the weld area shall be adequately covered with insulating material to ensure slow cooling. After cooling and before welding is resumed, visual examination of the weld shall be performed to assure that no cracks are formed. Required preheat shall be applied before welding is resumed.

#### 4.4.15.10.POSTWELD HEAT TREATMENT

PWHT shall meet the requirements of ASME BPV Code Section VIII Division 1. Table 3 summarises the PWHT requirements for commonly used materials. For equipment under the purview of IBR, PWHT shall be as per IBR.

##### a) GENERAL REQUIREMENTS

- i. A complete automatic temperature recording shall be made of preheating and stress relieving operations. Where propane gas burners or electrical resistance coils are employed, a complete temperature record of the preheating and stress relieving operation shall be made by means of a box type potentiometer. Other means of recording temperatures are permissible subject to the PURCHASER's approval.
- ii. Stress relief may be local or full furnace. Local stress relief shall be performed with electric induction or electric resistance coils.



Suitable gas burning equipment using natural gas or propane may be employed.

- iii. At no time during a stress relieving/preheating cycle shall any water or liquid cooling medium be employed.
- iv. Where members being joined are unequal in thickness, the dimension of the heavier section shall govern the selection of width of the heated band and the duration of the holding period shall be based on maximum weld thickness.
- v. For local stress relief, using electrical methods, a minimum of two (2) thermocouples tack-welded to the surface and potentiometers shall be used on the part under at least four (4) layers of asbestos paper. The hot junctions of the thermocouples shall be located on either side of the joint at least 12 mm from the edge of the joint but no further away than 100 mm. When employing induction heating, at least six (6) turns of induction cable shall be used on each side of the weld. Induction coils shall be wrapped on top of the asbestos paper protecting the thermocouples with the first turn approximately 150 mm from the centre of the weld.
- vi. Local stress relief using gas torches or ring burners may be employed.  
  
However, the procedure shall be limited to small items and shall be approved by the PURCHASER.
- vii. The stress relieving temperature shall be maintained for a period of time proportioned on the basis of one (1) hour per 25 mm of weld thickness at the joint, but in no case less than one (1) hour.
- viii. For piping joints and socket welded joints, pads, bosses, branch welds and couplings, one (1) thermocouple shall be positioned at a minimum distance of two (2) pipe wall thicknesses from the weld.
- ix. Equipment on both sides of any joint shall be adequately supported throughout the preheating, welding and stress relieving operations to prevent distortion.
- x. All heating and cooling rates shall be maintained as per ASME BPV Code and time-temperature charts from the recorder shall be made available for review and acceptance.

- xi. The VENDOR/CONTRACTOR shall submit a detailed written procedure for the

PWHT for the approval of the PURCHASER.

b) CARBON STEEL

- i. Welded joints in carbon steel shall be stress relieved, upon completion of the welding operation, in accordance with Table 3.
- ii. When local stress relief is employed, the welded joint shall be heated to a temperature of not less than 600°C. The temperature level shall be maintained between 600 and 650°C, one (1) hour per 25 mm of weld thickness but in no case less than one (1) hour. The weld area shall then be allowed to cool undisturbed in still air to a temperature not exceeding 315°C.
- iii. Heating and Cooling

Carbon steels, after having reached their specific stress relief temperatures, may be cooled in the furnace or under wraps, i.e., leaving the induction coils or resistance heaters and insulation in place. This means that, at the stress relief temperatures, the power to the furnace or heating coils may be shut off and cooling takes place in the furnace or with all insulation and coils remaining on the part. For furnace stress relief, the doors of the furnace may be opened after the power is shut off, at or below 315°C. Thermocouples controlling the temperatures shall remain during the cooling cycle so that excessive cooling, if it occurs, can be observed and immediately corrected. The stress relieving coils and insulation shall only be removed after the part has cooled to below 315°C or if stress relieved in a furnace the part may be removed from the furnace and permitted to cool in still air at a temperature not below 10°C.

c) ALLOY STEEL

- i. Welds in alloy steel shall be stress relieved after the welding operation in accordance with Table 3. After welding, the material shall be wrapped in asbestos and allowed to cool slowly if PWHT is not carried out immediately.
- ii. For full furnace stress relief of a welded assembly, the entire fabricated section shall be heated uniformly to the temperature specified. The temperature shall be maintained for a period of time proportioned on the basis of one (1) hour per 25 mm of weld

thickness of the piece having the greatest weld thickness in the furnace charge, but in no case, less than one (1) hour.

d) AUSTENITIC STAINLESS STEEL

- i. Welded joints in austenitic stainless steel need not be stress relieved after welding. Solution annealing shall be carried out, if specified.

4.4.15.11.ELECTRODES

- (a) The specification and size of the electrodes, voltages and amperages, thickness of beads and number of passes shall be as specified in the approved welding procedure or otherwise agreed in writing. Only basic coated electrodes shall be used, which will deposit weld metal having the same or higher physical properties and similar chemical composition to the members being joined. For each batch of approved brand, certificate showing compliance with the specification shall be submitted to the PURCHASER for review before being released for use. All electrodes shall be purchased in sealed containers and stored properly to prevent deterioration. As welding electrodes deteriorate under adverse conditions of storage leading to dampness in the electrode coating, they shall normally be stored in dehumidified air-conditioned rooms or in hot boxes or ovens in their original sealed containers whose temperatures shall be maintained within specified limits. The condition of electrodes shall be frequently inspected. Electrodes with damage to coating shall not be used. Electrodes shall remain identified until consumed. It is preferable to procure low hydrogen electrodes in hermetically sealed containers and preserve them without damage to the containers.
- (b) All low hydrogen electrodes, after baking as per the manufacturer's recommendations, shall be stored in ovens kept at 80 to 100°C before being used. Recommendations of the electrode manufacturer shall be strictly followed. Until the electrodes are taken out for welding, they shall be stored in portable ovens. The electrodes shall not be exposed to open atmosphere.
- (c) For welding of all grades of steel and alloys by the GTAW process, a 2%thoriated tungsten electrode conforming to SFA-5.12-86 EWTh-2 (AWS-A5.12-80, EWTh-2) classification shall be used.
- (d) All electrodes to be used on alloy and carbon steel shall conform to ASME BPV Code Section II Part C or any other equivalent code.
- (e) The type of electrodes used shall be only those recommended by the manufacturer for the use in the position in which the welds are to be made.

- (f) Current and polarity shall be maintained as recommended by the electrode manufacturer.

#### 4.4.15.12.INSPECTION AND TESTING

- (a) The PURCHASER shall have free access to inspect welding or any other related operations at any time and at any stage of fabrication.
- (b) The PURCHASER may require NDE of any weld for reasons other than those given in the specification. The responsibility for the cost of such testing shall be mutually decided between the PURCHASER and the VENDOR/CONTRACTOR.
- (c) The VENDOR/CONTRACTOR shall inform the PURCHASER when the weld preparation and set-up for welding of various members selected by the PURCHASER are in progress so that the PURCHASER can inspect the assembly before welding starts.
- (d) The responsibilities of the PURCHASER's representative shall in no way reduce the VENDOR/CONTRACTOR's responsibilities to ensure that the work is carried out in accordance with the specification
- (e) Any examination by NDE methods shall be performed before or after PWHT based on the applicable code requirements
- (f) For a welded branch connection and for any weld, necessary repairs and NDE shall be completed before any reinforcing pad is added.

#### 4.4.15.13.EXAMINATION OF WELDS

- (a) Examination refers to the quality control functions performed by the VENDOR / CONTRACTOR during fabrication, erection and testing.
- (b) As a minimum, the following shall be examined by visual examination:
  - i. Materials and components to ensure that these are as per the specification and are free from defects. If defects are noticed on “free- issue” items, these shall be brought to the notice of the PURCHASER without delay.
  - ii. Joint preparation and cleanliness
  - iii. Fit-up, joint clearance, and internal alignment prior to joining
  - iv. Preheating as applicable
  - v. Variables specified by the welding procedure, including filler material, position and electrode

- vi. Condition of the root pass after cleaning - external and where accessible, internal
  - vii. Slag removal and weld condition between passes
  - viii. Appearance of the finished joint and weld dimensions
- (c) Acceptance for the visual examination shall be as per ASME BPV Code Section VIII Division 1 or IBR as applicable.

#### 4.4.15.14. QUALIFICATION AND CERTIFICATION OF NDE PERSONNEL

- (d) Approved and documented NDE procedure prepared by level III personnel shall be made available.
- (e) The VENDOR's/CONTRACTOR's examining personnel shall have training and experience commensurate with the needs of the specified examinations. NDE supervisors/ examiners shall be qualified at level II or above of ASME BPV Code Section V.
- (f) The VENDOR/CONTRACTOR shall make available to the PURCHASER copies of certificates of qualification of the examiners he proposes to use for the PURCHASER's approval.

#### 4.4.15.15. METHODS OF EXAMINATION

- (a) The methods of examination used, Ultrasonic (UT), Radiographic (RT), MT and PT shall be in accordance with ASME BPV Code, Section V.

#### 4.4.15.16. ACCEPTANCE STANDARDS

- (a) Levels of acceptance of defects in welds shall be in accordance with ASME BPV Code Section VIII Division 1.
- (b) For equipment under the purview of IBR, the levels of acceptable defects shall be as per IBR.

#### 4.4.15.17. REPAIR WELDING

- (a) All defects in welds requiring repair shall be removed by flame or arc gouging, grinding, chipping or machining. The major repairs may involve:
  - (i) Cutting through the weld
  - (ii) Cutting out a portion of material containing the weld, or
  - (iii) Removing the weld metal down to the root depending upon the magnitude of the defects.

- (b) After removing the defect, the repaired portion and adjacent area shall be examined by the same NDE methods as specified for the original weld and the same acceptance criteria shall hold good.
- (c) All the repair welds shall be made using the same or other specified welding procedures as those used in making the original welds including preheating and stress relieving if originally required.

TABLE 1  
WELDING SPECIFICATION CHART FOR COMMONLY USED  
MATERIALS

| L. No. | Base material               | P. No. | Welding process    |                                    | Filler material                    |                                            | Notes  |
|--------|-----------------------------|--------|--------------------|------------------------------------|------------------------------------|--------------------------------------------|--------|
|        |                             |        | Root               | Filler                             | Root                               | Filler                                     |        |
| 1.0    | Carbon steels               | 1      | GTAW               | GTAW                               | ER 70S2 OR<br>ER 70S3              | ER 70S2<br>OR<br>ER 70S3                   |        |
| 1.1    | 5 mm thick                  |        |                    |                                    |                                    |                                            |        |
| 1.2    | 5 mm and 19 mm thick        | 1      | GTAW<br>OR<br>SMAW | SMAW<br>OR<br>SAW                  | ER 70S2 OR<br>ER 70S3 OR<br>E 6010 | E 6013<br>F6--EL8<br>OR E 7018<br>F7--EL12 |        |
| 1.3    | 19 mm thk                   | 1      | GTAW<br>OR<br>SMAW | SMAW<br>OR<br>SAW                  | ER 70S2 OR<br>ER 70S3 OR<br>E 6010 | E 7018<br>F7--EL12                         | 1      |
| 2.0    | Low alloy steels            | 4      | GTAW               | GTAW                               | ER 80S B2                          | ER 80S B2                                  |        |
| 2.1    | 1¼% cr ½% mo 5 mm thick     |        |                    |                                    |                                    |                                            |        |
| 2.2    | 1¼% cr ½% mo 5 mm thick     | 4      | GTAW               | SMAW                               | ER 80S B2                          | E 8016 OR<br>E8018-B2                      |        |
| 2.3    | 2¼% cr 1% mo 5 mm thick     | 5      | GTAW               | GTAW                               | ER 90S B3                          | ER 90S B3                                  | 2 to 7 |
| 2.4    | 2¼% cr 1% mo 5 mm thick     | 5      | GTAW               | SMAW                               | ER90S B3                           | E 9015 OR<br>E 9016 OR<br>E 9018-B3        | 2 to 7 |
| 3.0    | Austenitic stainless steels | 8      | GTAW               | GTAW<br>FOR 5<br>MM<br>THICK       | ER 308<br>(ER 308L)                | ER 308<br>(ER 308L)                        | 2 to 7 |
| 3.1    | Type 304<br>(304L)          |        |                    | SMA<br>W FOR<br>> 5<br>MM<br>THICK |                                    | E 308<br>(E 308L)                          |        |

|     |                                    |        |                    |                                   |                                     |                        |        |
|-----|------------------------------------|--------|--------------------|-----------------------------------|-------------------------------------|------------------------|--------|
| 3.2 | Type 316<br>(316L)                 | 8      | GTAW               | GTAW<br>FOR 5<br>MM<br>THICK      | ER 316<br>(ER316L)                  | ER 316<br>(ER 316L)    | 2 to 7 |
|     |                                    |        |                    | SMAW<br>FOR<br>> 5<br>MM<br>THICK |                                     | E 316<br>(E 316L)      |        |
| 3.3 | Type 321                           | 8      | GTAW               | GTAW<br>FOR<br>5 MM<br>THICK      | ER 321<br>OR<br>ER 347              | ER 321<br>OR ER<br>347 | 2 to 7 |
|     |                                    |        |                    | SMAW<br>FOR<br>> 5 MM<br>THICK    |                                     | E 321 OR<br>E 347      |        |
| 4.0 | Stainless steel to<br>carbon steel | 8 to 1 | GTAW<br>OR<br>SMAW | SMAW                              | ER 309<br>OR<br>E 309               | E 309                  |        |
| 4.1 | SS 304/321                         |        |                    |                                   |                                     |                        |        |
| 4.2 | SS 316                             | 8 to 1 | GTAW<br>OR<br>SMAW | SMAW                              | ER 309<br>MO<br>OR<br>E 309<br>MO   | E 309 MO               |        |
| 4.3 | SS 304L                            | 8 to 1 | GTAW<br>OR<br>SMAW | SMAW                              | ER 309L<br>OR<br>E 309L             | E 309L                 |        |
| 4.4 | SS 316L                            | 8 to 1 | GTAW<br>OR<br>SMAW | SMAW                              | ER 309<br>MOL<br>OR<br>E 309<br>MOL | E 309<br>MOL           |        |

N

#### NOTES

1.Low hydrogen electrodes shall be used for critical systems such as chlorine, hydrogen, caustic and similar toxic inflammable fluids and also whenever the wall thickness exceeds 19 mm

2. The argon shielding gas flow rate shall not be less than 0.34 M3/Hr.

3. For purging and shielding argon gas shall be used. However, nitrogen may be used as an alternative to argon for purging purpose only. In case of stainless steel, nitrogen may be used where corrosion resistance is not critical.
4. For fillet welds, SMAW may be used instead of GTAW for thicknesses above 5 mm.
5. For GTAW, electrode shall be 2% thoriated tungsten.
6. Initial purging prior to welding process shall be a minimum of five (5) times the volume between dams or ten minutes minimum whichever is higher. When welding commences, The purge gas flow shall ensure that the gas pressure is only marginally higher than atmospheric pressure to ensure no root concavity.
7. Back purging using argon/nitrogen shall be maintained for the root run and a minimum of one (1) additional pass.
8. Electrodes and filler wires manufactured by reputed firms duly approved by the PURCHASER shall only be used.
9. Electrodes shall have at least the same or higher physical properties and similar chemical composition to the members being joined.
10. Read the table in conjunction with para 3.0



TABLE 2

## PREHEAT REQUIREMENTS

| Sl. No. | Base material                     | P. No. | Nominal wall thickness, mm | Specified minimum tensile strength, mpa | Recommended minimum preheat temperature, °c |
|---------|-----------------------------------|--------|----------------------------|-----------------------------------------|---------------------------------------------|
| 1.      | Carbon steel                      | 1      | 25                         | 490                                     | 10                                          |
| 2.      | Carbon steel                      | 1      | 25                         | 490                                     | 100                                         |
| 3.      | Low alloy steel<br>- 1¼% cr ½% mo | 4      | All                        | All                                     | 149                                         |
| 4.      | Low alloy steel<br>- 2¼%cr 1% mo  | 5      | All                        | All                                     | 210                                         |

TABLE 3

## POSTWELD HEAT TREATMENT REQUIREMENTS (FOR COMMONLY USED STEEL MATERIALS)

| Sl. No. | Base material                   | P. No.             | Nominal wall thickness mm | Metal temperature range °c |
|---------|---------------------------------|--------------------|---------------------------|----------------------------|
| 1.      | Carbon steel                    | 1                  | 32                        | None                       |
| 2.      | Carbon steel                    | 1                  | > 32                      | 600 to 650                 |
| 3.      | Low alloy steel<br>1¼% cr ½% mo | 4 GR 1<br>AND<br>2 | All                       | 600 to 650                 |
| 4.      | Low alloy steel<br>2¼% cr 1% mo | 5A<br>GR 1         | All                       | 680 to 700                 |
| 5.      | Austenitic stainless steels     | 8, 9               | All                       | Note 3                     |

NOTES

1. In IBR systems, in carbon steels, PWHT is also required, when the carbon percentage exceeds 0.25%, at the temperature range of 600 +/- 20°C.

2. For all low alloy steel welds under the purview of IBR, the PWHT shall be carried out at the temperature range of 620 to 660° C for 1 1/4% Cr 1/2% Mo steels and at a range of 660 to 750°C for 2 1/4% Cr 1% Mo steels.
3. Solution annealing shall be carried out after welding of austenitic stainless steel as per the applicable services.
4. For equipment in carbon steels or alloy steels and meant for lethal service, PWHT of all welds shall be carried out.

#### **4.4.14 LOW VOLTAGE INDUCTION MOTORS**

##### **4.4.14.1. SCOPE**

The specification covers the design, material, constructional features, manufacture, inspection and testing at the VENDOR's / his SUB-VENDOR'S works, delivery to site and performance testing of Low Voltage induction motors rated up to 1000V.

##### **4.4.14.2. CODES AND STANDARDS**

The design, material, construction, manufacture, inspection, testing and performance of induction motors shall comply with all currently applicable statutes, regulations and safety codes in the locality where the equipment will be installed. The equipment shall also conform to the applicable standards specified in data sheet A1 latest revision as on the date of offer. Nothing in this specification shall be construed to relieve the VENDOR of this responsibility. In case of conflict between the standards and this specification, this specification shall govern.

##### **4.4.14.3. DRIVEN EQUIPMENT**

- (a) When this specification forms part of the driven equipment specification, information not given in the Data Sheet-A will be governed by the driven equipment specification.
- (b) Motors shall be capable of satisfactory operation for the application and duty as specified in the motor Data Sheet-A and as specified for the driven equipment.

##### **4.4.14.4. PERFORMANCE AND CHARACTERISTICS**

- (c) Motors shall be capable of giving rated output without reduction in the expected life span when operated continuously under either of the following supply conditions as specified in Data Sheet-A.

##### Supply Condition

|                                                         | I   | II   |
|---------------------------------------------------------|-----|------|
| (i) Variation in supply voltage from rated voltage      | ±6% | ±10% |
| (ii) Variation in supply frequency from rated frequency | ±3% | ±5%  |

- |      |                                             |           |
|------|---------------------------------------------|-----------|
| (ii) | Combined voltage and<br>Frequency variation | 9%    10% |
|------|---------------------------------------------|-----------|
- (a) Motors shall be suitable for the method of starting specified in the Data Sheet-A.
  - (b) The minimum permissible voltage shall be 85% of the rated voltage during motor starting.
  - (c) Motors shall be capable of starting and accelerating the load with the applicable method of starting, without winding temperatures reaching injurious levels, when the supply voltage is in the range of 85% of the rated motor voltage to maximum permissible voltage specified in Data Sheet-A.
  - (d) The locked rotor current of the motor shall not exceed 600% of full load current (subject to tolerances as per the applicable standard) unless otherwise specified. The locked rotor current of VFD controlled motor shall be within the limit of IS12615 / IEC.
  - (e) Motors shall be capable of developing the rated full load torque even if the supply voltage drops to 70% of the rated voltage. The pull out torque of the motor shall be at least 205% of full load torque.
  - (f) Motors when started with the driven equipment coupled shall be capable of withstanding at least two successive starts from cold conditions & one start from hot condition without injurious heating of windings. The motors shall also be suitable for three equally spread starts per hour under the above referred supply conditions.
  - (g) Motors shall be of Energy Efficient type if specified in Data sheet-A1. Category of Energy efficiency shall be as mentioned in data sheet-A1.

#### 4.4.14.5. SPECIFIC REQUIREMENTS OF VFD DRIVEN MOTORS

- (a) The motor shall be suitable for operation with a solid-state power supply consisting of an adjustable frequency inverter for speed control.
- (b) The motor shall be suitable for the current waveforms produced by the power supply including the harmonics generated by the drive.
- (c) The Motor shall be designed to operate continuously at any speed over the range 10-100 % of rated speed.
- (d) The permitted voltage variation should take into account the steady state voltage drop across the AC drive and all other system components upstream of the motor.

- (e) The motor shall be constructed to withstand torque pulsations resulting from harmonics generated by the solid-state power supply.
- (f) The driven equipment manufacturer shall be solely responsible for proper selection of the motor for the given load application and the output characteristics of the driven equipment.

#### 4.4.14.6. INSULATION

- (a) The insulation shall be given tropical and fungicidal treatment for successful operation of the motor in hot, humid and tropical climate.
- (b) Motors which are VFD controlled shall be inverter grade and shall be suitably derated to take care of reduced cooling at lower speeds.
- (c) Insulation of VFD controlled Motors shall be designed to withstand a dv/dt of 0.1 micro sec rise from 10 % to 90 % of steady voltage and a maximum peak of 1600 volts as per NEMA standard MG1 Part 31.40.4.2 .
- (d) The insulation shall be of double coat winding wires which having superior electric strength and thermal capability for VFD controlled motors.
- (e) Winding shall be insulated as VPI (Vacuum Pressure Impregnation) of winding with suitable resin forces which eliminating voids for VFD controlled motors.

#### 4.4.14.7. TEMPERATURE RISE

- (a) The temperature rises shall not exceed the values given in IS 12802. Under extremes of supply condition, the temperature rise shall not exceed the value indicated in IS by 10°C.
- (b) For motors specified for outdoor installation heating due to direct exposure to solar radiation shall be considered.

#### 4.4.14.8. CONSTRUCTIONAL FEATURES

- (a) All windings shall be of Copper. The winding insulation shall be Non-hygroscopic, oil resistant and, flame resistant.
- (b) Motors weighing more than 25 kg. shall be provided with eyebolts, lugs or other means to facilitate safe lifting.
- (c) Noise level and vibration limit should not exceed as specified in relevant IS / IEC.

#### 4.4.14.9. BEARINGS

- (a) Unless otherwise specified in data sheet-A, motor bearings shall not be subjected to any external thrust load.

- (b) Unless otherwise specified, motor bearings shall have an estimated life of at least 40,000 hrs.
- (c) The bearings shall permit running of the motor in either direction of rotation.
- (d) When forced oil lubrication or water cooling is required, prior approval from the purchaser shall be obtained.
- (e) It shall be possible to lubricate the bearings without dismantling any part of the motor.
- (f) VFD controlled Motors shall have their bearings insulated to prevent motor shaft currents from entering the bearing race.

#### 4.4.14.10. TERMINAL BOX

- (a) Terminal boxes shall have a degree of protection of atleast IP 55 for out door applicable.
- (b) Unless otherwise approved, the terminal box shall be capable of being turned through 360o in steps of 90o.
- (c) Terminals shall be of stud type & the terminal box shall be complete with necessary lugs, nuts, washers.
- (d) When single core cables are to be used the gland plates shall be of non magnetic material.
- (e) Sizes of terminal boxes and lugs shall be as given in Table-I, unless specified otherwise in data sheet A or Specification.

**TABLE-I**

**415 V MOTORS - SIZES OF CABLES, STUDS, TERMINAL LUGS & TERMINAL BOXES**

**(TO BE PROVIDED ON MOTORS BY VENDOR)**

| Sl No. | Motor Rating (kW) | 1100V Al Conductor, armoured PVC/XLPE Cable Cores x mm <sup>2</sup> |
|--------|-------------------|---------------------------------------------------------------------|
| 1.     | Upto 3            | 3x4                                                                 |
| 2.     | 3.1 - 7.5         | 3x6                                                                 |
| 3.     | 7.6 - 15          | 3x16                                                                |
| 4.     | 16 - 25           | 3x35                                                                |
| 5.     | 26 - 40           | 3x70                                                                |
| 6.     | 41 - 55           | 3x120                                                               |
| 7.     | 56 - 70           | 3x185                                                               |

|     |           |           |
|-----|-----------|-----------|
| 8.  | 71 - 85   | 3x240     |
| 9.  | 86 - 110  | 3x400     |
| 10. | 111 - 200 | 3Rx1Cx500 |

#### 4.4.14.11.PAINT AND FINISH

- (a) All motor parts exposed directly to atmosphere shall be finished and painted to produce a neat and durable surface which would prevent rusting and corrosion. The equipment shall be thoroughly degreased, all rust, sharp edges and scale removed and treated with one coat of primer and finished with two coats of grey enamel paint.

#### 4.4.14.12.HEATING DURING IDLE PERIODS

- (a) Motors rated above 30 kW shall have space heaters suitable for 240V, single phase, 50 Hz, AC supply. Space heaters shall have adequate capacity to maintain motor internal temperature above dew point to prevent moisture condensation during idle period. The space heaters shall be placed in easily accessible positions in the lowest part of the motor frame.

#### 4.4.14.13.ACCESSORIES

- (a) Two independent earthing points shall be provided on opposite sides of the motor, for bolted connection of the PURCHASER'S earthing conductors as specified in data sheet-A. These earthing points shall be in addition to earthing stud provided in the terminal box.
- (b) Except when otherwise specified, the motors shall be provided with a bare shaft extension having a key slot and a key at the driving end.

#### 4.4.14.14.TESTS

- (a) Motor shall be subjected to all the routine tests as per applicable standard in the presence of the PURCHASER'S representative. Copies of test certificates of type and routine tests shall be furnished as specified in the distribution schedule, for the PURCHASER'S approval. The VENDOR shall ensure to use calibrated test equipment/instruments having valid calibration test certificates from standard laboratories traceable to national/international standards.
- (b) If type tests have not been carried out on similar Motors, or if the type test reports submitted are not found in order, then VENDOR shall carry out these tests without any extra cost to the Purchaser.

#### 4.4.14.15.LOW VOLTAGE INDUCTION MOTORS DATA SHEET-A1

| Sl.no. | Description | Unit | Technical particulars |
|--------|-------------|------|-----------------------|
|--------|-------------|------|-----------------------|

| Sl.no. | Description                                       | Unit | Technical particulars                                    |
|--------|---------------------------------------------------|------|----------------------------------------------------------|
| 1.0    | General                                           |      |                                                          |
| 1.1    | Application                                       |      | (*)                                                      |
| 1.2    | Numbers required                                  |      | (*)                                                      |
| 1.3    | Type of motor                                     |      | Squirrel cage (energy efficient- IE-3 as per 12615) type |
| 1.4    | Supply system fault level                         | MVA  | 16 kA                                                    |
| 1.5    | Type of earthing of supply system neutral         |      | Effectively earthed system                               |
| 2.0    | Rating                                            |      |                                                          |
| 2.1    | Rated output :                                    | kW   | kW (*)                                                   |
| 2.2    | Rated voltage :                                   | V    | 415V                                                     |
| 2.3    | Number of phases & frequency                      |      | 3 Phase, 50 Hz                                           |
| 2.4    | Supply condition as per specification             |      | II                                                       |
| 2.5    | Synchronous speed                                 | Rpm  | Rpm(*)                                                   |
| 3.0    | Duty                                              |      |                                                          |
| 3.1    | Type of duty (clause 9.2 of is:325 or equivalent) |      | (*)                                                      |
| 3.2    | Power required by load                            | Kw   | (*)                                                      |
| 3.3    | Energy efficiency class as per is-12615-2011      |      | IE3                                                      |
| 4.0    | Method of starting                                |      | D.O.L /STAR DELTA                                        |
| 5.0    | Insulation                                        |      |                                                          |
| 5.1    | Class of insulation                               |      | F with temp. Rise class-b                                |
| 5.2    | Ref. Ambient temperature                          | °C   | 45°C                                                     |
| 5.3    | Temperature rise by                               |      | Corresponding to class b insulation                      |
| 5.3.1  | Thermometer method                                | °C   | 55°C                                                     |
| 5.3.2  | By winding resistance method                      |      | 65°C (class b)                                           |
| 6.0    | Installation                                      |      |                                                          |
| 6.1    | Location                                          |      | Indoor                                                   |
| 6.2    | Hazardous area division (is:5572 or equivalent)   |      | Not applicable                                           |

| Sl.no. | Description                                    | Unit      | Technical particulars                                      |
|--------|------------------------------------------------|-----------|------------------------------------------------------------|
| 6.3    | Atmosphere                                     |           | Chemical                                                   |
| 7.0    | Enclosure                                      |           |                                                            |
| 7.1    | Type of cooling (is 6362)                      |           | TEFC                                                       |
| 7.2    | Designation for degree of protection (is 4691) |           | IP 55                                                      |
| 8.0    | Main terminal box                              |           |                                                            |
| 8.1    | Location as seen from non- drive end:          |           | Top/right/left (*)                                         |
|        | Ratings                                        |           | (*)                                                        |
| 8.2    | (a) Short time                                 |           |                                                            |
|        | I. Current :                                   | Ka(rms)   |                                                            |
|        | II. DURATION :                                 | Secs.     | 0.1                                                        |
|        | (b) Dynamic :                                  | Ka (peak) |                                                            |
| 8.3    | External cable details                         |           | (#)                                                        |
| 8.3.1  | Type                                           |           |                                                            |
| 8.3.2  | Size & no of cores                             |           |                                                            |
| 8.4    | Earthing conductors                            |           |                                                            |
| 8.4.1  | Material                                       |           | GI                                                         |
| 8.4.2  | Size                                           |           | (#)                                                        |
| 9.0    | Miscellaneous requirements                     |           | <b><u>To be filled if motors are bought seperately</u></b> |
| 9.1    | Shaft orientation                              |           | Horizontal/vertical/hollow vertical (*)                    |
| 9.2    | Mounting symbol (is:2253 or equivalent)        |           | (*)                                                        |
| 9.3    | Rotation as seen from non-drive end            |           | Clockwise/anti-clockwise/ Bi-Directional (*)               |
| 9.4    | Type of bearing                                |           |                                                            |
| 9.4.1  | Drive end                                      |           | (*)                                                        |
| 9.4.2  | Non drive end                                  |           | (*)                                                        |
| 9.5    | Whether bed plate required                     |           | (#)                                                        |



| Sl.no. | Description                                                                  | Unit | Technical particulars            |
|--------|------------------------------------------------------------------------------|------|----------------------------------|
| 9.6    | Motor shall match the following torque requirements of the driven equipment: |      | (*)                              |
|        | A) Starting torque                                                           |      |                                  |
|        | B) Full load (rated) torque                                                  |      |                                  |
|        | C) Pull out torque                                                           |      |                                  |
|        | D) Pull up torque                                                            |      |                                  |
| 9.7    | Coupling by motor supplier                                                   |      | Yes/no (will be informed later)  |
| 9.8    | If yes, type of coupling                                                     |      |                                  |
| 10.0   | Colour shades of paint                                                       |      | Light grey ( shade -631 of IS-5) |
| 11     | Whether vibration pads required                                              |      | (#)                              |
| 12     | Temperature detectors/indicators                                             |      |                                  |
| 12.1   | Embedded temperature detectors for winding required                          |      | No                               |
| 12.2   | Embedded temperature detectors for bearings required                         |      | No                               |
| 12.3   | Bearing thermometers for driving end & non driving ends required             |      | No                               |
| 13     | Space heaters for motors required (for motors greater than 30kw )            |      | Yes for motors of 30kW & above   |

#### 4.4.14.16.LOW VOLTAGE INDUCTION MOTORS DATA SHEET-A2

| Sl.no. | Brief title                                         | Reference number of standards                                                                           |
|--------|-----------------------------------------------------|---------------------------------------------------------------------------------------------------------|
| 1.     | Three phase induction motors                        | <input type="checkbox"/> IS-325 <input type="checkbox"/> BS-4999 <input type="checkbox"/> IEC-34        |
| 2.     | Rotating electrical machines                        | <input type="checkbox"/> IS-4722 <input type="checkbox"/> BSEN60034-1 <input type="checkbox"/> IEC-34-1 |
| 3.     | Single phase induction motors                       | <input type="checkbox"/> IS-996 <input type="checkbox"/> BS <input type="checkbox"/> IEC                |
| 4.     | Code of practice for climate proofing               | <input type="checkbox"/> IS <input type="checkbox"/> BS-6751 <input type="checkbox"/> IEC               |
| 5.     | Designations for types of construction and mounting | <input type="checkbox"/> IS-2253 <input type="checkbox"/> BSEN60034-7 <input type="checkbox"/> IEC-34-7 |

| Sl.no. | Brief title                                                                   | Reference number of standards                                                                                 |
|--------|-------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|
|        | arrangement of rotating electrical machines                                   |                                                                                                               |
| 6.     | Terminal marking & direction of rotation for rotating electrical machinery    | <input type="checkbox"/> IS-4728 <input type="checkbox"/> BS-4999-108 <input type="checkbox"/> IEC-34-8       |
| 7.     | Designation of methods of cooling for rotating electrical machines            | <input type="checkbox"/> IS-6362 <input type="checkbox"/> BSEN 60034-6-1994 <input type="checkbox"/> IEC-34-6 |
| 8.     | Degrees of protection provided by enclosure for rotating electrical machinery | <input type="checkbox"/> IS-4691 <input type="checkbox"/> BS-EN60529 <input type="checkbox"/> IEC-529         |
| 9.     | Guide for testing three phase induction motors                                | <input type="checkbox"/> IS-4029 <input type="checkbox"/> BSEN60034-2 <input type="checkbox"/> IEC-34-2       |
| 10.    | Measurement and evaluation of vibration of rotating electrical machines       | <input type="checkbox"/> IS-12075 <input type="checkbox"/> BS-4999142 <input type="checkbox"/> IEC-34-14      |
| 11.    | Classification of hazardous areas for electrical installation                 | <input type="checkbox"/> IS-5572 <input type="checkbox"/> BS <input type="checkbox"/> IEC-79                  |
| 12.    | Dimensions of slide rails for electric motors                                 | <input type="checkbox"/> IS-2968 <input type="checkbox"/> BS-4999-141 <input type="checkbox"/> IEC            |
| 13.    | Permissible limits of noise level for rotating electrical machines            | <input type="checkbox"/> IS-12065 <input type="checkbox"/> BSEN 60034-9-1994 <input type="checkbox"/> IEC     |
| 14.    | Guide for testing insulation resistance of rotating machines                  | <input type="checkbox"/> IS-7816 <input type="checkbox"/> BS <input type="checkbox"/> IEC                     |
| 15.    | Induction motors- energy efficient three phase squirrel cage- specification   | <input type="checkbox"/> IS-12615-2011 <input type="checkbox"/> IEC-60034-3                                   |
| 16.    | Flame proof a c motors for use in mines.                                      | <input type="checkbox"/> IS- 3682                                                                             |
| 17.    | Flame proof enclosures of electrical apparatus                                | <input type="checkbox"/> IS-2148                                                                              |
| 18.    | Starting performance of single speed three phase cage induction               | <input type="checkbox"/> IS-8789 <input type="checkbox"/> BSEN-60034-12 <input type="checkbox"/> IEC-34-12    |

| Sl.no. | Brief title                                                                                 |                                                                       | Reference number of standards                                           |
|--------|---------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|-------------------------------------------------------------------------|
|        | motors for voltage up to 600 v                                                              |                                                                       |                                                                         |
| 19.    | Cage induction motors when fed from converters – application guide                          |                                                                       | <input type="checkbox"/> IEC-34-17                                      |
| 20.    | Adjustable speed electrical power drive system- emc requirements and specific test methods. |                                                                       | <input type="checkbox"/> BS-EN-61800 <input type="checkbox"/> IEC-61800 |
| 21.    | Dimensions and output series for rotating electrical machines.                              | <input type="checkbox"/> IS-1231 <input type="checkbox"/> BS-4999-141 | <input type="checkbox"/> IEC- 72-1                                      |
| 22.    | Electrical apparatus for explosive gas atmosphere – classification of hazardous area.       | <input type="checkbox"/> IS-5571 <input type="checkbox"/> BSEN-60079  | <input type="checkbox"/> IEC-79-10                                      |
| 23.    | Temperature rise measurement of rotating electrical machines                                | <input type="checkbox"/> IS-12802 <input type="checkbox"/> BS         | <input type="checkbox"/> IEC                                            |
| 24.    | Type of duty and classes of rating assigned to rotating electrical machines                 | <input type="checkbox"/> IS 12824 <input type="checkbox"/> BS         | <input type="checkbox"/> IEC                                            |
| 25.    | Cbip recommendation for motors                                                              |                                                                       |                                                                         |

**NOTES:**

1. Details marked thus (\*) will be decided and intimated by the bidder based on driven equipment characteristics
2. Data marked thus (#) will be intimated to vendor after placement of order.
3. Data marked thus (^) will be decided and intimated by the bidder.
4. Associated accessories, components/parts, raw material and tests shall in general conform to ☐ is ☐ bs ☐ iec .
5. Offers conforming to other authoritative standards may also be considered/may not be considered.
6. Use ☒ mark for applicable for relevant is and iec.

## 4.4.14.17.SHOP INSPECTION REQUIREMENTS VALVES-METALLIC

| Serial no.                                                                                                      | Description                             | Visual examination                                                                                                                                                                                                                                                                                                                                                                 | Dimensions | Material test cert. | Identification | Pouring | Pt / mt | Radiography | Ultrasonic test | Heat treatment | Hardness test | Shell, gland leak | Seat, back seat | Seat leak test - air | Set point | Disc strength test | Performance / Type tests | Routine tests | Adhesion, | Endurance (type) |  |  |
|-----------------------------------------------------------------------------------------------------------------|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------------------|----------------|---------|---------|-------------|-----------------|----------------|---------------|-------------------|-----------------|----------------------|-----------|--------------------|--------------------------|---------------|-----------|------------------|--|--|
| 1                                                                                                               | Pressure parts - materials              | D                                                                                                                                                                                                                                                                                                                                                                                  |            | C                   | D              | D       | B       | B           | B               | C              | D             | D                 |                 |                      |           |                    |                          |               |           |                  |  |  |
| 2                                                                                                               | Trims (seats, stem, plug, disc etc.)    |                                                                                                                                                                                                                                                                                                                                                                                    |            | C                   |                |         | D       |             | B               |                | B             |                   |                 |                      |           |                    |                          |               |           |                  |  |  |
| 3                                                                                                               | Springs                                 |                                                                                                                                                                                                                                                                                                                                                                                    |            | C                   |                |         |         |             |                 |                |               |                   |                 |                      |           |                    |                          | C             |           | C                |  |  |
| 4                                                                                                               | Diaphragm                               |                                                                                                                                                                                                                                                                                                                                                                                    |            |                     |                |         |         |             |                 |                | C             |                   |                 |                      |           |                    |                          |               |           | D                |  |  |
| 5                                                                                                               | Non - metallic items, if any            |                                                                                                                                                                                                                                                                                                                                                                                    |            | C                   |                |         |         |             |                 |                | D             |                   |                 |                      |           |                    |                          |               |           |                  |  |  |
| 6                                                                                                               | Actuators, positioners, if any          | A                                                                                                                                                                                                                                                                                                                                                                                  | A          |                     |                |         |         |             |                 |                |               | A                 |                 |                      |           |                    | A                        | C             | C         |                  |  |  |
| 7                                                                                                               | Finished items                          | A                                                                                                                                                                                                                                                                                                                                                                                  | A          |                     |                |         |         |             |                 |                |               | A                 | A               | B                    |           |                    | A                        |               |           |                  |  |  |
| 8                                                                                                               | Safety relief valves - additional tests |                                                                                                                                                                                                                                                                                                                                                                                    |            |                     |                |         |         |             |                 |                |               | D                 |                 | A                    | A         |                    |                          |               |           |                  |  |  |
| 9                                                                                                               | Linings, if any                         | A                                                                                                                                                                                                                                                                                                                                                                                  |            |                     |                |         |         |             |                 |                |               |                   |                 |                      |           |                    |                          |               | A         |                  |  |  |
| <b>Leged</b><br>A - witnessed by TCE.<br>B - witnessed by TCE if requirement is specified.<br>Y - including cv. |                                         | <b>Nots</b><br>1 - all stages shall be checked 100 % by vendor and records thereof shown to TCE.<br>2 - witnessing by TCE may be 100 % or on random samples.<br>3 - this document shall be read in conjunction with inspection requirements mentioned in and relevant technical specifications.<br>4 - the pressure gauges and instruments for measuring critical parameters shall |            |                     |                |         |         |             |                 |                |               |                   |                 |                      |           |                    |                          |               |           |                  |  |  |

#### 4.4.14.18.SHOP INSPECTION REQUIREMENTS PIPES AND PIPE FITTINGS-METALLIC

| Serial no. | Description                                | Visual examination | Dimensions | Material test cert. | Identification | Ultrasonic test | Welding | Fit up | Backchip-pt | Pt / mt | Radiography | Ovality, thinning | Heat treatment | Surface finish | Hydrostatic leak | Hardness test  | Spark, adhesion | Thickness check | Material check test |  |  |
|------------|--------------------------------------------|--------------------|------------|---------------------|----------------|-----------------|---------|--------|-------------|---------|-------------|-------------------|----------------|----------------|------------------|----------------|-----------------|-----------------|---------------------|--|--|
| <b>A</b>   | <b>Ordered on manufacturer</b>             |                    |            |                     |                |                 |         |        |             |         |             |                   |                |                |                  |                |                 |                 |                     |  |  |
| 1          | Plates / pipes for fabricated items        | D                  | D          | C                   | D              | D               |         |        |             |         |             |                   |                |                |                  |                |                 |                 |                     |  |  |
| 2          | Rolling, forming for fab. Items            | D                  | D          |                     |                |                 |         |        |             |         |             | D                 |                |                |                  |                |                 |                 |                     |  |  |
| 3          | Butt, groove welds for fabricated items    | D                  | D          |                     |                | B               | C/a     | D      | D           | B       | B           |                   |                |                |                  |                |                 |                 |                     |  |  |
| 4          | Finished items                             | A                  | A          | C                   | A              | B               |         |        |             |         |             |                   | C              | B              | B                |                |                 |                 | D                   |  |  |
| 5          | Linings, if any                            | A                  |            |                     |                |                 |         |        |             |         |             |                   |                |                |                  | A              | A               | A               |                     |  |  |
| 6          | Coatings, if any                           | A                  |            |                     |                |                 |         |        |             |         |             |                   |                |                |                  |                |                 | A               |                     |  |  |
| <b>B</b>   | <b>Ordered on dealers / stockists etc.</b> | A                  | A          | C                   | A              |                 |         |        |             |         |             |                   |                | A              | C                | A <sub>x</sub> | A <sub>x</sub>  | A <sub>x</sub>  | D                   |  |  |
|            |                                            |                    |            |                     |                |                 |         |        |             |         |             |                   |                |                |                  |                |                 |                 |                     |  |  |
|            |                                            |                    |            |                     |                |                 |         |        |             |         |             |                   |                |                |                  |                |                 |                 |                     |  |  |

| Leged                                             |                      | Notes                                                                                                                           |
|---------------------------------------------------|----------------------|---------------------------------------------------------------------------------------------------------------------------------|
| A - witnessed by TCE.                             |                      | 1 - all stages shall be checked 100% by vendor and records thereof shown to TCE.                                                |
| B - witnessed by TCE if requirement is specified. |                      | 2 - witnessing by TCE may be 100 % or on random samples.                                                                        |
|                                                   | X - for lined items. | 3 - this document shall be read in conjunction with inspection requirements mentioned in and relevant technical specifications. |
|                                                   |                      | 4 - the pressure gauges and instruments for measuring critical parameters shall                                                 |

#### 4.4.14.19.SHOP INSPECTION REQUIREMENTS FOR STRAINERS

| Serial no.                                                                                                                                     | Description                | Visual examination                                                                                                                                                                                                                                                                                                                                                                       | Dimensions | Material test cert. | Identification and correlation | Welding qualification | Hydrostatic leak test | Performance / operation | Hardness test | Spark, adhesion test | Thickness check |  |  |  |  |  |
|------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------------------|--------------------------------|-----------------------|-----------------------|-------------------------|---------------|----------------------|-----------------|--|--|--|--|--|
| 1                                                                                                                                              | Pressure parts - materials |                                                                                                                                                                                                                                                                                                                                                                                          |            | C                   | D                              |                       |                       |                         |               |                      |                 |  |  |  |  |  |
| 2                                                                                                                                              | Finished item              | A                                                                                                                                                                                                                                                                                                                                                                                        | A          |                     |                                | C/a                   | A                     | D                       |               |                      |                 |  |  |  |  |  |
| 3                                                                                                                                              | Linings, if any            | A                                                                                                                                                                                                                                                                                                                                                                                        |            |                     |                                |                       |                       |                         | A             | A                    | A               |  |  |  |  |  |
| <b>Legend</b><br>A - witnessed by TCE.<br>B - witnessed by TCE if requirement is specified.<br>C - records verified by TCE wherever applicable |                            | <b>Notes</b><br>1 - all stages shall be checked 100 % by vendor and records thereof shown to TCE.<br>2 - witnessing by TCE may be 100 % or on random samples.<br>3 - this document shall be read in conjunction with inspection requirements mentioned in and relevant technical specifications.<br>4 - the pressure gauges and instruments for measuring critical parameters shall have |            |                     |                                |                       |                       |                         |               |                      |                 |  |  |  |  |  |

#### 4.4.14.20.SHOP INSPECTION REQUIREMENTS FIRE PROTECTION EQUIPMENT

| Serial Numbers                                                                                                                                         | DESCRIPTION                           | Visual                                                                                                                                                                                                                                                                                                          | Dimensions | Material test cert. | Body leak test | Seat leak test | Flow test | Operation test | Performance test | Percolation test | Change in dia. And length | Kink test | Accelerated ageing | Weight per | Balancing | Fitment | Makes and ratings | Wiring, | Interlock test | H.V., I.T, | Flame/smo | Fire test | Type test | Routine test |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------------------|----------------|----------------|-----------|----------------|------------------|------------------|---------------------------|-----------|--------------------|------------|-----------|---------|-------------------|---------|----------------|------------|-----------|-----------|-----------|--------------|
| 1                                                                                                                                                      | Landing / hydrant valve               | A                                                                                                                                                                                                                                                                                                               | A          | C                   | A              | A              | D         | A              |                  |                  |                           |           |                    |            |           |         |                   |         |                |            |           |           |           |              |
| 2                                                                                                                                                      | Branch pipes, nozzles, hose couplings | A                                                                                                                                                                                                                                                                                                               | A          | C                   | A              |                |           |                |                  |                  |                           |           |                    |            |           |         |                   |         |                |            |           |           |           |              |
| 3                                                                                                                                                      | Fire hoses                            | A                                                                                                                                                                                                                                                                                                               | A          | C                   | A              |                |           |                |                  | B                | A                         | B         | B                  | A          |           |         |                   |         |                |            |           |           |           |              |
| 4                                                                                                                                                      | Portable fire extinguisher            | A                                                                                                                                                                                                                                                                                                               | A          | C                   |                |                |           |                | D                |                  |                           |           |                    |            |           |         |                   |         |                |            |           |           |           |              |
| 5                                                                                                                                                      | Booster pump                          | A                                                                                                                                                                                                                                                                                                               | A          | C                   | D              |                |           | A              | A                |                  |                           |           |                    |            | D         |         |                   |         |                |            |           |           |           |              |
| 6                                                                                                                                                      | Pipes, fittings, valves               | A                                                                                                                                                                                                                                                                                                               | A          | C                   | D              | D              |           |                |                  |                  |                           |           |                    |            |           |         |                   |         |                |            |           |           |           |              |
| 7                                                                                                                                                      | Fire hose boxes                       | A                                                                                                                                                                                                                                                                                                               | A          | C                   |                |                |           |                |                  |                  |                           |           |                    |            |           | A       |                   |         |                |            |           |           |           |              |
| 8                                                                                                                                                      | Motors > 30 kw / <30 kw               | D                                                                                                                                                                                                                                                                                                               | D          |                     |                |                |           |                |                  |                  |                           |           |                    |            |           |         |                   |         |                |            |           |           | C         | A/           |
| <b><u>Legend</u></b><br>A - witnessed by TCE.<br>B - witnessed by TCE if requirement is specified.<br>C - records verified by TCE wherever applicable. |                                       | <b><u>Notes</u></b><br>1 - all stages shall be checked 100 % by vendor and records thereof shown to TCE.<br>2 - witnessing by TCE may be 100 % or on random samples.<br>3 - this document shall be read in conjunction with inspection requirements mentioned in TCE.<br>And relevant technical specifications. |            |                     |                |                |           |                |                  |                  |                           |           |                    |            |           |         |                   |         |                |            |           |           |           |              |

#### **4.4.15 SHOP INSPECTION AND TESTS**

##### **4.4.15.1. SCOPE**

- (a) This specification covers the requirements for Shop Inspection and Tests to be carried out by the PURCHASER/CONSULTANT/INSPECTION AGENCY.

##### **4.4.15.2. GENERAL**

- (a) The plant and equipment covered by the PURCHASE ORDER/CONTRACT shall be subjected to inspection and testing. The VENDOR/CONTRACTOR shall provide all services to establish and maintain quality of workmanship in his works and that of his SUB-VENDOR's/SUB-CONTRACTOR's works to ensure the mechanical accuracy of components, compliance with approved drawings, identification and acceptability of all materials, parts and equipment.
- (b) For supply of systems, the VENDOR/CONTRACTOR shall, at the start of the PURCHASE ORDER/CONTRACT, furnish a total list of items in his scope of work. This list, giving a brief description of the item, quantity, names of probable SUB-VENDORS/SUB-CONTRACTORS, and a blank column for agency for final approval of drawings and documents, shall be submitted for approval by PURCHASER/CONSULTANT. The blank column shall be filled by PURCHASER/CONSULTANT. The list shall be submitted within two weeks from the date of Letter of Intent.
- (c) For systems and major items such as pressure and load bearing items, machineries etc., the VENDOR/CONTRACTOR shall furnish quality plan giving details of checks and tests to be conducted by them on material, process, sub-assembly and assembly. These shall include requirements as prescribed in the applicable specifications, codes and statutory requirements. The quality plan shall be reviewed by the PURCHASER/CONSULTANT and the stages to be witnessed and verified shall be indicated by the PURCHASER/CONSULTANT in the approved quality plan.
- (d) The VENDOR/CONTRACTOR shall give the PURCHASER/CONSULTANT written notice of any material being ready for testing as per format enclosed. The clear notice period shall be seven (7) days for local inspection and fifteen (15) days for outstation inspection. Such tests shall be to the VENDOR's/CONTRACTOR's account except for the expenses of the PURCHASER/CONSULTANT. The PURCHASER/CONSULTANT, unless the inspection of the tests is virtually waived, shall fix a date for inspection with the VENDOR/CONTRACTOR and attend such tests within fifteen (15) days of the date on which the equipment is notified as being ready for test and inspection failing which, the VENDOR/CONTRACTOR may proceed with the tests and shall forthwith forward to the PURCHASER/CONSULTANT duly certified



copies of tests in triplicate. If the VENDOR/CONTRACTOR fails to offer the equipment for inspection as per the agreed date, he is liable to pay for the time and expenses for the infructuous visit of the PURCHASER/CONSULTANT.

- (e) In all cases where inspection and tests are required whether at the premises or works of the VENDOR/CONTRACTOR or of any SUB-VENDOR/SUB-CONTRACTOR or at laboratory, the VENDOR/CONTRACTOR, except where otherwise specified, shall provide free of charge all facilities such as labour, materials, electricity, fuel, water, stores, test bed, apparatus and instruments, laboratory tests etc. as may be required by the PURCHASER/CONSULTANT to carry out effectively such tests of the equipment in accordance with the PURCHASE ORDER/CONTRACT and shall give facilities to the PURCHASER/CONSULTANT to accomplish testing.
- (f) The PURCHASER/CONSULTANT shall at all working hours have access to all parts of the VENDOR's/CONTRACTOR's and his SUB-VENDOR's/SUB-CONTRACTOR's factory where the items of the plant are being prepared, for carrying out inspection activities as deemed necessary. A set of the relevant latest approved drawings with approval marking of the PURCHASER/CONSULTANT and drawings for proprietary items shall be made available by the VENDOR/CONTRACTOR to the PURCHASER/CONSULTANT, for reference during inspection.
- (g) In the case of stage inspection hold points, the VENDOR/CONTRACTOR shall proceed from one stage to another only after the component is inspected by the PURCHASER/CONSULTANT and written permission given to proceed further. The same procedure shall be adopted for any rectifications and repairs suggested by the PURCHASER/CONSULTANT.
- (h) The PURCHASER/CONSULTANT shall have the right to inspect any machinery, material, structures, equipment or workmanship furnished or used by the VENDOR/CONTRACTOR and may reject any which is defective or unsuitable for the use and purpose intended, or which is not in accordance with the intent of the PURCHASE ORDER/CONTRACT. The VENDOR/CONTRACTOR, upon demand by the PURCHASER/CONSULTANT, shall remedy or replace at the VENDOR's/CONTRACTOR's expense such defective or unsuitable items of the plant, or the PURCHASER/CONSULTANT may, at the expense of the VENDOR/CONTRACTOR, remedy or replace such defective or unsuitable items of the Plant.
- (i) All principal mill test reports, the VENDOR/CONTRACTOR inspection and tests reports, test certificates and test curves shall be supplied for all inspection and tests carried out including other records such as stress relieving charts,

radiographic charts and other non-destructive testing records in accordance with the provisions of the PURCHASE ORDER/CONTRACT, duly certified by the main VENDOR/CONTRACTOR. The PURCHASER/CONSULTANT shall reserve the right to call for certificates of origin and test certificates for all raw material and equipment at any stage of manufacture.

- (j) The PURCHASER/CONSULTANT shall within fifteen (15) days from the date of inspection as defined herein give notice in writing to the VENDOR/CONTRACTOR of any non-conformance pertaining to all or any equipment and workmanship which in his opinion is not in accordance with the PURCHASE ORDER/CONTRACT. The VENDOR/CONTRACTOR shall give due consideration to such objections and shall either make the modifications that may be necessary to meet the said objections or shall confirm in writing to the PURCHASER/CONSULTANT giving reasons therein that no modifications are necessary to comply with the PURCHASE ORDER/CONTRACT.
- (k) When the factory tests and documentation have been satisfactorily completed at the VENDOR's/CONTRACTOR's or SUB-VENDOR's/CONTRACTOR's works, the PURCHASER/CONSULTANT shall issue acceptance note or shipping release note or a certificate to this effect within fifteen (15) days after completion, but if the tests are not witnessed by the PURCHASER/CONSULTANT, the certificate or comments thereof shall be issued within fifteen (15) days of the receipt of the VENDOR's/CONTRACTOR's test certificate by the PURCHASER/CONSULTANT. Failure of the PURCHASER/CONSULTANT to take such an action shall not prevent the VENDOR/CONTRACTOR from proceeding with the work. The completion of these tests or the issue of the certificates shall not bind the PURCHASER/CONSULTANT to accept the equipment, should it, on further tests after erection, be found not to comply with the PURCHASE ORDER/CONTRACT.
- (l) None of the plant and the equipment to be furnished or used in connection with the PURCHASE ORDER/CONTRACT shall be despatched until shop inspection, satisfactory to the PURCHASER/CONSULTANT has been made. However, such shop inspection and/or certification shall not relieve the VENDOR/CONTRACTOR of his responsibility for furnishing the plant and the equipment conforming to the requirements of the PURCHASE ORDER/CONTRACT nor prejudice any claim, right or privilege which the PURCHASER/CONSULTANT may have because of the use of defective or unsatisfactory items. Should the PURCHASER/CONSULTANT waive the right to inspect any item, such waiver shall not relieve the VENDOR/CONTRACTOR in any way from his obligation under the PURCHASE ORDER/CONTRACT. In the event of the PURCHASER's/CONSULTANT's inspection revealing poor quality of goods,

the PURCHASER/CONSULTANT shall be at liberty to specify additional inspection procedures, if required, to ascertain the VENDOR/CONTRACTOR's compliance with the equipment specifications.

#### 4.4.15.3. SUB-ORDERS AND SUB-CONTRACTS

- (a) In order to facilitate the inspection of bought-out materials and plant, the VENDOR/CONTRACTOR shall submit for approval, three (3) copies of all sub-orders and sub-contracts placed by him as soon as these are issued. Copies of any drawings referred to in the sub-order or sub-contracts shall also be submitted, unless agreed otherwise by the PURCHASER/CONSULTANT.
- (b) The sub-orders, sub-contracts and drawings referred to above shall include all components which are subjected to electrical and mechanical pressure or stress when the plant is in operation, and also auxiliaries and spares which are to be directly despatched to site from the SUB-VENDOR's/SUB-CONTRACTOR's works.
- (c) All sub-orders and sub-contracts of the main VENDOR/CONTRACTOR shall clearly be marked with the main VENDOR's/CONTRACTOR's name and the PURCHASER's/CONSULTANT's name and the PURCHASE ORDER/CONTRACT reference. These shall include the following statement:

The plant or the equipment which is the subject of this PURCHASE ORDER/CONTRACT shall comply in every respect with the requirements of the

PURCHASER's/CONSULTANT's technical specifications and shall be subject to inspection and tests to the satisfaction of the PURCHASER/CONSULTANT.

- (d) For the purpose of this para, it is obligatory on the VENDOR/CONTRACTOR that he advises his SUB-VENDOR/SUB-CONTRACTOR of the pertinent clauses in this specification when ordering bought-out plant, equipment or materials. In particular, the VENDOR/CONTRACTOR shall advise every SUB-VENDOR/SUB-CONTRACTOR that he is required to supply design calculations, drawings, inspection reports and test certificates strictly in accordance with this specification and technical information for inclusion in the Instruction Manual as specified in specification. The SUB-VENDORS/SUB-CONTRACTORS should also be reminded that they shall include with their offer all tools and appliances necessary for proper maintenance and all spare parts as per specified in specification. Itemised prices of the recommended spare parts shall be submitted together with the appropriate part numbers and drawings.

- (e) Sub-ordering and sub-contracting for major items such as pressure and load bearing items, machinery etc. can be done only with the approval of the PURCHASER/CONSULTANT.

#### 4.4.15.4. MATERIAL TESTS

- (a) In the event of the PURCHASER/CONSULTANT being supplied with the certified particulars of tests which have been carried out for the VENDOR/CONTRACTOR by the supplier of material, the PURCHASER/CONSULTANT may, at his own discretion, accept the same as proper evidence of compliance with the requirements of appropriate specifications for the materials.
- (b) The VENDOR/CONTRACTOR is to provide test pieces as required by the PURCHASER/CONSULTANT to enable him to determine the quality of material supplied under the PURCHASE ORDER/CONTRACT. If any test piece fails to comply with the requirements, the PURCHASER/CONSULTANT may reject the entire lot of material represented by the test piece.
- (c) Critical materials used in manufacture of the equipment and construction of the plant covered by the PURCHASE ORDER/CONTRACT may also be subjected to one or more of the Non-Destructive Tests (NDT) as called for in the enquiry document or as mutually agreed. Salvaging of material due to unacceptable defect is to be attempted by the VENDOR/CONTRACTOR only after getting specific concurrence from the PURCHASER/CONSULTANT and according to the approved procedures.

#### 4.4.15.5. WELDING

- (a) All welding involved in construction and fabrication of the plant and items covered under the PURCHASE ORDER/CONTRACT shall be carried out in accordance with specifications and applicable codes.
- (b) Welding procedures and welders' qualifications shall be approved by the PURCHASER/CONSULTANT. Where applicable, welders shall be tested as detailed in codes specified for pipe welding, vessel welding and structural welding and appropriate to the corresponding weld position using test pieces of appropriate parent metal to be used on the job. The PURCHASER/CONSULTANT shall have the right to have any welder re-tested at any time during the PURCHASE ORDER/CONTRACT.
- (c) Recommendations of applicable codes shall be followed for non-destructive tests, wherever applicable.

- (d) Copies of all welding procedures, procedure qualification records, welders' performance qualification certificates, post-heating and stress relieving records, NDT records and other test results shall be made available upon request of the PURCHASER/CONSULTANT.

#### 4.4.15.6. FABRICATION AND INSPECTION

- (a) Fabrication and inspection procedures for vessels, heat exchangers, pipes, tubes and valves etc. shall be in accordance with procurement specifications, quality plan, applicable codes or any other approved equal.

#### 4.4.15.7. TESTS AT MANUFACTURER'S WORKS

- (a) GENERAL

The tests at works shall include electrical, mechanical and hydraulic tests in accordance with the appropriate clauses of Statutory Regulation, relevant codes and standards and approved drawings and specifications and in addition any test called for by the PURCHASER/CONSULTANT to ensure that the plant being supplied fulfils the requirements of the specifications. The VENDOR/CONTRACTOR shall carry out all the shop tests and inspections specified under individual items of the equipment in Data Sheets of the enquiry document, in addition to those normally required as per codes and standards. For items not covered by any code or specifically mentioned in the specifications, the tests are to be agreed with by the PURCHASER/CONSULTANT. If considered necessary by the PURCHASER/CONSULTANT, multi-part assemblies shall be fully erected and tested in the works prior to packing and despatch to the site.

- (b) TEST CERTIFICATES

Test certificates including test records, performance curves and balancing certificates shall be supplied according to the Distribution Schedule. All the tests shall be carried out in accordance with the provisions of the PURCHASE ORDER/CONTRACT.

All test certificates must be endorsed with sufficient information to identify the material or the equipment to which the certificates refer, and must carry at the top right hand corner the identification of the PURCHASER/CONSULTANT and the PURCHASE ORDER/CONTRACT.

- (c) CALIBRATION

All instruments used for critical measurement such as pressure gauges for leak tests, instruments for measuring performance parameters; instruments for precision dimension measurements shall have valid calibration certificates traceable to national standards. This means that the calibrating agency

engaged by the VENDOR/CONTRACTOR shall use instruments which are in turn calibrated by Government approved agencies and such information shall be recorded in the calibration certificate issued by the calibrating agency by giving the certificate number, date and date of validity of the certificate given by the Government approved agency.

## 4.5 LIST OF APPROVED MAKES

### 4.5.1 FIRE PROTECTION SYSTEM

This section provides details of the Approved Vendors / Approved makes for bought-out items, which form a part of this enquiry package. BIDDER shall clearly indicate the makes of all bought-out items and shall at no point in time during execution shall deviate from those indicated in the offer document.

**NOTE:** LIST OF APPROVED MAKES FOR PRODUCTS AND MATERIALS FOR FIRE PROTECTION SYSTEM ARE INDICATED IN THE TABLE BELOW. HOWEVER, ANY OTHER MAKE WHICH IS EQUIVALENT AND MEETING THE TENDER SPECIFICATIONS ARE ALSO ACCEPTABLE WITH PRIOR APPROVAL OF THE ENGINEER.

| SR. NO. | ITEMS                                                         | MANUFACTURER                                                                          |
|---------|---------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 1.      | Pump                                                          | Grundfos/ KBL/ Mather & Platt / Armstrong/ Greaves Ltd.                               |
| 2.      | Motors                                                        | Refer Appendix-2 of specification for approved/preferred makes of electrical items.   |
| 3.      | C.I. Gate Valves                                              | KBL / Nibco /Zoloto                                                                   |
| 4.      | C.I.Non Return Valves (Wafer Pattern)                         | Kirloskar / Upadhaya/ BDK/ Intervolve.                                                |
| 5.      | valves (For hose reels, air release valve)                    | ZOLOTO/ Leader/ Hawa Valves (India) Pvt. Ltd./ Avishkar Engineers Pvt. Ltd./ Upadhaya |
| 6.      | Wrapping coating (for underground pipes)                      | IWL (PYPEKOTE)/Rustech                                                                |
| 7.      | Pipe Fittings (below 50 mm dia) 'T', elbow, sockets, reducers | JK Forging / Gautam Industries / M. S. Fitting Manufacturing Pvt. Ltd.                |
| 8.      | Pipe Fittings (bends, reducers) (above 50mm dia)              | MS Fittings (Calcutta) / Echjay / Tubebend                                            |
| 9.      | M.S Pipes                                                     | Tata steel / Jindal(Hissar) / SAIL                                                    |
| 10.     | Hydrant valves, Branch Pipe with nozzles and Hose coupling.   | Newage / Sukan / SBJ/Shah Bhogilal                                                    |

| <b>SR. NO.</b> | <b>ITEMS</b>        | <b>MANUFACTURER</b>                                                                                                                                                                       |
|----------------|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 11.            | Hoses               | Newage / CRC.                                                                                                                                                                             |
| 12.            | Paint               | Berger Paints/ Asian Paints/ Nerolac / Shalimar Paints                                                                                                                                    |
| 13.            | Strainers           | Filtration Engineers Pvt. Limited, Mumbai/ Kwikflow Filters & Equipment, Mumbai/ Pennant Engg Pvt Ltd., Pune/ Spirax Marshall Ltd., Pune / Superflow Filters Ltd., Mumbai, Jaypee./zoloto |
| 14.            | Anti vibration pads | Dunlop, EasyFlex                                                                                                                                                                          |
| 15.            | Fire Extinguishers  | Minimax/Safex/Firex /Ceasefire/Nitin Fire                                                                                                                                                 |

#### 4.5.2 ELECTRICAL SYSTEM

**NOTE:** LIST OF APPROVED MAKES FOR PRODUCTS AND MATERIALS FOR FIRE PROTECTION SYSTEM (ELECTRICAL) ARE INDICATED IN THE TABLE BELOW. HOWEVER, ANY OTHER MAKE WHICH IS EQUIVALENT AND MEETING THE TENDER SPECIFICATIONS ARE ALSO ACCEPTABLE WITH PRIOR APPROVAL OF THE ENGINEER.

##### APPENDIX-2

| <b>Sr. No.</b> | <b>Items</b>                     | <b>Manufacturer</b>                          |
|----------------|----------------------------------|----------------------------------------------|
| 1.             | L V Switchgear                   | L&T/ Schneider/ ABB                          |
| 2.             | Distribution Boards              | L&T/ Legrand/ ABB                            |
| 3.             | Moulded Case Circuit Breaker     | L&T/ Schneider/ ABB                          |
| 4.             | Motor Protection Circuit Breaker | L&T/ Schneider/ ABB                          |
| 5.             | Contactors                       | L&T/ Legrand/ Schneider                      |
| 6.             | Current Transformer              | Kappa/ Silkans / Pragati / Indcoil / Precise |
| 7.             | Ammeter and Voltmeter            | AE/Rishabh / Conserve                        |
| 8.             | Push buttons                     | Siemens/Teknic/Vaishno/BCH                   |
| 9.             | LED Indicating lamps             | Teknic / Mathura / Siemens / Binay           |



| Sr. No. | Items                               | Manufacturer                    |
|---------|-------------------------------------|---------------------------------|
| 10.     | MCB                                 | L&T/ Schneider/ ABB             |
| 11.     | Control fuses                       | SIEMENS / GE                    |
| 12.     | Terminal Block                      | SIEMENS / GE                    |
| 13.     | Switch-socket                       | Anchor / Reputed                |
| 14.     | Space Heater                        | Girish / reputed                |
| 15.     | L T Motor                           | Siemens/ABB/Kirloskar/CGL       |
| 16.     | L T Cable                           | KEI/ CCI/ Finolex               |
| 17.     | HFFR wires (including panel wiring) | Finolex/ LAPP/ RR KABEL         |
| 18.     | Local Push button station (LPBS)    | L&T/ Teknic/ Schneider/ Mathura |
| 19.     | Cable Trays                         | Indiana/ Patny/ Profab/ OBO     |

Any other make subjected to prior approval of purchaser / Consultant.

#### 4.5.3 INSTRUMENTATION & CONTROL SYSTEM

This section provides details of the Approved Vendors / Approved makes for Electrical and I&C items, which form a part of this tender. For any other type of item/instrument; makes shall be subject to Purchaser's/Consultant's Approval.

**NOTE:** LIST OF APPROVED MAKES FOR PRODUCTS AND MATERIALS FOR FIRE PROTECTION SYSTEM (INSTRUMENTATION AND CONTROL) ARE INDICATED IN THE TABLE BELOW. HOWEVER, ANY OTHER MAKE WHICH IS EQUIVALENT AND MEETING THE TENDER SPECIFICATIONS ARE ALSO ACCEPTABLE WITH PRIOR APPROVAL OF THE ENGINEER.

| Sr. No | Description         | Manufacturer                        |
|--------|---------------------|-------------------------------------|
| 1.     | Pressure Indicators | Forbes Marshal/Waree/H. Guru/FIEBIG |
| 2.     | Water flow switch   | System sensor/Potter                |

| Sr. No | Description                  | Manufacturer                                                                             |
|--------|------------------------------|------------------------------------------------------------------------------------------|
| 3.     | Panel Integrators            | Industrial controls & Appliances/Industrial switchgear control/Sun Industrial Automation |
| 4.     | Panel Enclosure              | Rittal/President                                                                         |
| 5.     | Local Indicator              | Emerson/Yokogawa/Masibus                                                                 |
| 6.     | Instrument erection Hardware | Parker/Swagelok/Excel Hydropneumatics/Wintec                                             |
| 7.     | Cables                       | Polycab/CCI/Nicco/Aisan(RPG)/Lapp cable/Sterlite/RP cables/Thermocable Ltd, AP/Universal |
| 8.     | Relays                       | Siemens/OEN/Omron                                                                        |
| 9.     | Terminals                    | Elmex/Connectwell/Wago/Phoenix                                                           |
| 10.    | 24V DC power supply units    | Apla/Pheonix/Cosel                                                                       |
| 11.    | GI Cable trays               | Indiana/Profab /Patny /Sterlite/Reliance                                                 |

**TECHNICAL SPECIFICATION**

**HVAC WORKS**

## HVAC WORKS

### 5.1 **AIR -COOLED VARIABLE REFRIGERANT FLOW SYSTEM:**

#### 5.1.0. SCOPE

The scope of this section comprises the supply, erection testing and commissioning of inverter based Variable Refrigerant Volume System with Scroll Compressor conforming to these specifications and in accordance with the requirements of Drawing and Schedule of Quantities

#### 5.1.1. TYPE

Units shall be air cooled, variable refrigerant volume air conditioner of R410A gas based consisting of outdoor unit and multiple indoor units. Each indoor units having capability to cool or heat independently for the requirement of the rooms. It shall be possible to connect several indoor units on one refrigerant circuit. The indoor units on any circuit can be of different type and also controlled individually. Following type of indoor units shall be connected to the system:

- a) Floor Mounted Packaged units
- b) Ductable type
- c) Wall hung

Both indoor units and outdoor unit shall be factory assembled, tested and filled with first charge of refrigerant before delivering at site.

#### 5.1.2. OUTDOOR UNIT

The outdoor unit shall be factory assembled, weather proof casing, constructed from heavy gauge mild steel panels and coated with baked enamel finish. The unit should be completely factory wired tested with all necessary controls and switch gears: The outdoor unit shall be modular in design and should be allowed for side by side installation. The outdoor unit shall be provided with welded steel support with two coats of paint for erection purpose.

- All outdoor units above 8 HP shall have minimum two scroll compressors and be able to operate even in case one of compressor is out of order.
- In case of outdoor units above 14HP, the outdoor unit shall have at least 2 inverter compressors and inverter motor of brushless DC Type so that the operation is not disrupted with failure of any compressor.
- It should also be provided with duty cycling for switching starting sequence of multiple outdoor units.
- The noise level shall not be more than 68 dB (A) at anechoic chamber conversion value, measured horizontally 1m away and 1.5m above ground level.

- The outdoor unit shall be modular in design and should be allowed for side by side Installation.
- The unit shall be provided with its own microprocessor control panel. The outdoor unit should be fitted with low noise, aero spiral design fan with large airflow and should be designed to operate compressor-linking technology. The unit should also be capable to deliver 78 Pa external static pressure to meet long exhaust duct connection requirement.

The condensing unit shall be designed to operate safely when connected to multiple fan coil units, which have a combined operating nominal capacity up to 160 % of indoor units for outdoor units up to 40 HP.

#### **5.1.2.1. COMPRESSOR**

The compressor shall be highly efficient scroll type and capable of inverter control. It shall change the speed in accordance to the variation in cooling or heating load requirement:

The inverter shall be IGBT type for efficient and quiet operation. All outdoor units shall have at least 10 to 30 steps of capacity control to meet load fluctuation and indoor unit individual control. All parts of compressor shall be sufficiently lubricated stock. Forced lubrication may also be employed. Oil heater shall be provided in the compressor casing. C.O.P for the units shall not be less than 4.5.

#### **5.1.2.2. HEAT EXCHANGER**

The heat exchanger shall be constructed with copper tubes mechanically bonded to aluminum fins to form a cross fin coil. The aluminum fins shall be covered by anti-corrosion resin film.

The unit shall be provided with necessary number of direct driven low noise level propeller type fans arranged for vertical discharge. Each fan shall have a safety guard.

#### **5.1.2.3. REFRIGERANT CIRCUIT**

The refrigerant circuit shall include liquid & gas shut-off valves and a solenoid valves at condenser end.

All necessary safety devices shall be provided to ensure the safely operation of the system.

#### **5.1.2.4. SAFETY DEVICES**

All necessary safety devices shall be provided to ensure safe operation of the system. Following safety devices shall be part of outdoor unit; high pressure switch, fuse, crankcase heater, fusible plug, over load relay, protection for inverter, and short recycling guard timer.

#### **5.1.2.5. OIL RECOVERY SYSTEM**

Unit shall be equipped with an oil recovery system to ensure stable operation with long refrigeration piping lengths.

#### **5.1.2.6. INDOOR UNIT**

This section deals with supply, installation, testing, commissioning of various type of indoor units confirming to general specification and suitable for the duty selected. The type, capacity and size of indoor units shall be as specified in detailed Bill of Quantities

#### **5.1.3. GENERAL**

**5.1.3.1.** Indoor units shall be wall mounted type or ceiling mounted ductable type as specified in BOQ. These units shall have electronic control valve to control refrigerant flow rate respond to load variations of the room.

a) The address of the indoor unit shall be set automatically in case of individual and group control

b) There shall be localized control only.

**5.1.3.2.** The fan shall be dual suction, aerodynamically designed turbo, multi blade type, statically & dynamically balanced to ensure low noise and vibration free operation of the system. The fan shall be direct driven type, mounted directly on motor shaft having supported from housing.

**5.1.3.3.** The cooling coil shall be made out of seamless copper tubes and have continuous aluminum fins. The fins shall be spaced by collars forming an integral part. The tubes shall be staggered in the direction of airflow. The tubes shall be hydraulically/mechanically expanded for minimum thermal contact resistance with fins. Each coil shall be factory tested at 21kg/sqm air pressure under water.

**5.1.3.4.** Unit shall have cleanable type filter fixed to an integrally molded plastic frame. The filter shall be slide away type and neatly inserted. Each indoor unit shall have computerized PID control for maintaining design room temperature. Each unit shall be provided with microprocessor thermostat for cooling and heating.

**5.1.3.5.** The outdoor unit shall be pre-charged with first charge of R 410A refrigerant. Additional charge shall be added as per refrigerant piping at site. All the units shall be suitable for operation with 380 - 415 V 50 Hz + 3%, 3 Phase supply for outdoor units & 220 – 240 V, 50 Hz + 3%, 1 Phase supply for in-door units.

**5.1.3.6.** The units shall be integrated with Fire Alarm system and in case of fire all units shall be switched off. The Al fins of Condenser Coils shall be provided with suitable factory installed protective for corrosion prevention.

**5.1.3.7.** The outdoor units must be suitable for up to 150m (straight length) refrigerant piping between outdoor unit & the farthest indoor units, total piping of 500m for all the

indoor units. Allowable level difference between outdoor unit & indoor units shall be 50m in case of outdoor unit on top & 40 m in case of outdoor unit at bottom. Allowable level difference between various indoor units connected to one outdoor unit shall be up to 15m.

**5.1.3.8.** The outdoor unit shall employ system of equal run time for all the compressors, inverter or on/ off type, within each outdoor unit – Single Module or Multi Module.

**5.1.3.9.** The outdoor units shall be suitable to operate within an ambient temperature range of – 5 Deg C to 43 Deg C, in cooling mode & -20 Deg C to 15 Deg C in heating mode.

**5.1.3.10.** Air cooled condenser shall have Axial Flow, upward throw fan, directly coupled to fan motors with minimum IP 55 protection. The outdoor unit condenser fan shall be able to develop external static pressure up to 6 mm of H<sub>2</sub>O.

**5.1.3.11.** The entire operation of outdoor units shall be through independent remotes of indoor units. No separate Start/ Stop function shall be required.

**5.1.3.12.** Starter for the Outdoor Unit compressor shall “Direct on Line” type. Inverter compressor of the unit shall start first & at the minimum frequency, to reduce the inrush current during starting.

**5.1.3.13.** Refrigerant control in the outdoor unit shall be through Electronic Expansion Valve. Complete refrigerant circuit, oil balancing/ equalizing circuit shall be factory assembled & tested.

**5.1.3.14.** Outdoor units shall be complete with following safety devices:

- a) High pressure switch
- b) Fan driver overload protector
- c) Over current relay
- d) Inverter Overload Protector
- e) Fusible Plug

#### **5.1.4. CEILING MOUNTED DUCTABLE TYPE UNIT**

a) Unit shall be suitable for ceiling mounted type. The unit shall include pre filter, fan section & DX coil section. The housing of unit shall be light weight powder coated galvanized steel. The unit shall have high static fan for Ductable arrangement.

b) These units shall be ceiling suspended with suitable supports to take care of operating weight of the unit, without causing any excessive vibration & noise. The cold air supplied by these units will be supplied to the area to be air conditioned, through duct system specified in the tender.

c) Each indoor unit must have electronic expansion valve operated by microprocessor thermostat based temperature control to deliver cooling/ heating

as per the heat load of the room.

d) Unit must be insulated with sound absorbing thermal insulation material, Glass Fibre. The noise level of unit at the highest operating level shall not exceed 49 dB(A), at a vertical distance of 1.5 m below the units with duct connected to the unit.

e) Unit must have Thermal Fuse for fan motor protection, in case of motor heating. The unit will be connected in series to a suitable outdoor unit & it must be possible to operate the unit independently, through corded/ cordless remote specified in the bill of quantities. The unit will be further connected to Intelligent Building Management System (To be supplied by other vendors) & it shall be possible to operate the unit through this IBMS system

### **DATA SHEET A**

|                                                       |                                           |
|-------------------------------------------------------|-------------------------------------------|
| 1.0 Make                                              | Dakin/ Bluestar/ Voltas                   |
| 2.0 Casing                                            | CS/ (CS/ CAST AL)/ EN8                    |
| 3.0 Type: Ductable/ Cassete/ High wall                | Ductable/Package Floor Mounted/ High wall |
| 4.0 Dimension WxDxH (M)                               | Ducatble - 1500x750x650                   |
|                                                       | Package Floor Mounted - 1250x750x1800     |
|                                                       | High wall - 1100x300x350                  |
| 5.0 Cooling Capacity                                  | VRF Table is given below                  |
| 6.0 Air quantity at max. Speed                        |                                           |
| And 1 m long duct collar CMH                          |                                           |
| 7.0 Air quantity at min. Speed                        |                                           |
| And 1.0 m. Long duct collar CMH                       |                                           |
| 8.0 Whether auxiliary drain pan                       |                                           |
| Provided: Yes/No.                                     | Yes/No.                                   |
| 9.0 Make & model of room thermostat.                  |                                           |
| 10.0 Whether acoustic lined                           | Yes/No.                                   |
| duct collar included in Unit price                    | Yes/No.                                   |
| 11.0 Does Indoor Unit have return air plenum. Yes/No. | Yes/No.                                   |
| 12.0 Noise Level at 1 m distance:                     | 55db                                      |
|                                                       |                                           |
| <b>OUTDOOR</b>                                        |                                           |
| 1. Manufacturer                                       | Dakin/ Bluestar/ Voltas                   |
| 2. Type                                               | Copeland                                  |
| 3. Model                                              |                                           |
| 4. Overall dimensions (mm) WxDxH                      | 1100x1100x1750                            |
| 5. Operating Weight (kg.)                             | 300                                       |



|                                   |                               |
|-----------------------------------|-------------------------------|
| 6. No. of fans                    | 1                             |
| 7. CMH per fan                    |                               |
| 8. Outlet velocity (Mts. Per min) |                               |
| 9. Tip speed (Mts per min)        |                               |
| 10. Compressor Type               | Digital Scroll + Fixed Scroll |
| 11. Vibration isolator            | Rubber pads                   |
| 12. Noise Level at 1 m distance:  | 62db                          |

**VRF list of equipments Table:**

| ADMIN BLOCK-AV-MUMBAI     | A (sq.m) | TR   | SELECTED TR | EACH UNIT TR | QTY. | CMH EACH | MODEL                    |
|---------------------------|----------|------|-------------|--------------|------|----------|--------------------------|
| GROUND FLOOR              |          |      |             |              |      |          |                          |
| ENVORONMENTAL TESTING LAB | 76.6     | 5.1  | 5           | 2.5          | 2    | 1230     | WALL MOUNTED INDOOR UNIT |
| CUSTOMER CELL             | 70.8     | 4.8  | 5           | 2            | 2    | 1020     |                          |
| SAFETY TESTING LAB        | 50.8     | 3.4  | 4           | 2            | 2    | 1020     |                          |
| RECEPTION                 | 69.1     | 4.6  | 5           | 2.5          | 2    | 1230     |                          |
| SUB TOTAL                 | 267.3    | 18.0 |             | 9            | 8    |          |                          |
|                           |          |      |             |              |      |          |                          |
| FIRST FLOOR               |          |      |             |              |      |          |                          |
| SECRETARY                 | 43.8     | 2.9  | 3           | 1.5          | 2    | 890      |                          |
| GM OFFICE                 | 50.9     | 3.4  | 4           | 2            | 2    | 1020     |                          |
| WAITING AREA              | 21.2     | 1.4  | 2           | 2            | 1    | 1020     |                          |
| ADMIN / ACCOUNTS          | 49.0     | 3.3  | 4           | 2            | 2    | 1020     |                          |
| OTHER CABINS              | 184.6    | 12.4 | 13          | 2            | 6    | 1020     |                          |
| CONFERENCE ROOM           | 158.8    | 10.7 | 11          | 2            | 6    | 1020     |                          |
| SUB TOTAL                 | 413.6    | 34.2 |             | 12           | 19   |          |                          |
|                           |          |      |             |              |      |          |                          |
| SECOND FLOOR              |          |      |             |              |      |          |                          |
| EMI/EMC EQUIPMENTS        | 407.5    | 27.4 | 31          |              |      |          |                          |
| OFFICE OF TESTING         | 118.0    | 7.9  | 8           | 2            | 4    | 1020     |                          |
| IT ROOM                   | 13.8     | 0.9  | 1           | 1            | 1    | 610      |                          |
| SAFETY TESTING LAB        | 60.0     | 4.0  | 4           | 2            | 2    | 1020     |                          |
| SAFETY TESTING LAB        | 60.0     | 4.0  | 4           | 2            | 2    | 1020     |                          |

| <b>ADMIN BLOCK-AV-MUMBAI</b> | <b>A (sq.m)</b> | <b>TR</b> | <b>SELECTED TR</b> | <b>EACH UNIT TR</b> | <b>QTY.</b> | <b>CMH EACH</b> | <b>MODEL</b> |
|------------------------------|-----------------|-----------|--------------------|---------------------|-------------|-----------------|--------------|
| ENVIRONMENTAL TESTING LAB    | 60.0            | 4.0       | 4                  | 2                   | 2           | 1020            |              |
| RoHS TESTING LAB             | 87.3            | 5.9       | 6                  | 2                   | 3           | 1020            |              |
| MEETING ROOM                 | 56.3            | 3.8       | 4                  | 2                   | 2           | 1020            |              |
| RoHS TESTING LAB-1           | 80.4            | 5.4       | 6                  | 2                   | 3           | 1020            |              |
| SUB TOTAL                    | 284.0           | 63.4      |                    | <b>2</b>            | <b>15</b>   |                 |              |
|                              |                 |           |                    | <b>15</b>           | <b>19</b>   |                 |              |
| THIRD FLOOR                  |                 |           |                    |                     |             |                 |              |
| CALIBRATION LAB              | 58.0            | 3.9       | 4                  | 2                   | 2           | 1020            |              |
| CALIBRATION LAB              | 58.0            | 3.9       | 4                  | 2                   | 2           | 1020            |              |
| SERVER ROOM                  | 13.8            | 0.9       | 1                  | 1                   | 1           | 610             |              |
| CALIBRATION LAB              | 60.0            | 4.0       | 4                  | 2                   | 2           | 10250           |              |
| CALIBRATION LAB              | 50.1            | 3.4       | 4                  | 2                   | 2           | 1020            |              |
| CALIBRATION LAB              | 62.8            | 4.2       | 5                  | 2.5                 | 2           | 1020            |              |
| CALIBRATION LAB              | 56.3            | 3.8       | 4                  | 2                   | 2           | 1020            |              |
| CALIBRATION LAB              | 87.3            | 5.9       | 6                  | 2                   | 3           | 1020            |              |
| ENGLISH LANGUAGE LAB         | 80.4            | 5.4       | 6                  | 2                   | 3           | 1020            |              |
| CLASS ROOM                   | 68.5            | 4.6       | 5                  | 2.5                 | 2           | 1230            |              |
| CLASS ROOM                   | 75.0            | 5.0       | 5                  | 2.5                 | 2           | 1230            |              |
| CLASS ROOM                   | 75.0            | 5.0       | 5                  | 2.5                 | 2           | 1230            |              |
| CLASS ROOM                   | 73.2            | 4.9       | 5                  | 2.5                 | 2           | 1230            |              |
| CLASS ROOM                   | 83.3            | 5.6       | 6                  | 2                   | 3           | 1020            |              |
| SUB TOTAL                    |                 | 60.6      |                    |                     |             |                 |              |
| GRAND TOTAL                  | 964.9           | 176.2     | 188.3193           | <b>30</b>           | <b>30</b>   |                 |              |

**DATA SHEET - B**

|                                                       |  |
|-------------------------------------------------------|--|
| 1.0 Make                                              |  |
| 2.0 Casing                                            |  |
| 3.0 Type: Ductable/ Cassete/ High wall                |  |
| 4.0 Dimension WxDxH (M)                               |  |
| 5.0 Cooling Capacity                                  |  |
| 6.0 Air quantity at max. Speed                        |  |
| And 1 m long duct collar CMH                          |  |
| 7.0 Air quantity at min. Speed                        |  |
| And 1.0 m. Long duct collar CMH                       |  |
| 8.0 Whether auxiliary drain pan                       |  |
| Provided: Yes/No.                                     |  |
| 9.0 Make & model of room thermostat.                  |  |
| 10.0 Whether acoustic lined                           |  |
| duct collar included in Unit price                    |  |
| 11.0 Does Indoor Unit have return air plenum. Yes/No. |  |
| 12.0 Noise Level at 1 m distance:                     |  |
|                                                       |  |
| <b>OUTDOOR</b>                                        |  |
| 1. Manufacturer                                       |  |
| 2. Type                                               |  |
| 3. Model                                              |  |
| 4. Overall dimensions (mm) WxDxH                      |  |
| 5. Operating Weight (kg.)                             |  |
| 6. No. of fans                                        |  |
| 7. CMH per fan                                        |  |
| 8. Outlet velocity (Mts. Per min)                     |  |
| 9. Tip speed (Mts per min)                            |  |
| 10. Compressor Type                                   |  |
| 11. Vibration isolator                                |  |
| 12. Noise Level at 1 m distance:                      |  |

## 5.2 **THERMAL INSULATION FOR COLD SURFACES:**

**5.2.0. SCOPE** This specification covers the technical requirements and essential particulars for the supply, application and finishing of the complete thermal insulation for cold equipment, piping systems, air-conditioning ducts etc. for temperatures between ambient and (-) 80°C and also for dual temperatures (both hot and cold) service with hot temperature above ambient and up to 230°C. Unless specified otherwise in section C and/or data sheet A, the scope of supply of the CONTRACTOR shall include, but not be limited to, the following items :

- (a) Insulation materials of all types as specified and required
- (b) Insulation adhesives, vapor barriers and finishing materials of all types as specified and required
- (c) Auxiliary materials such as binding and lacing wires, wire netting, bands, screws, pop rivets etc., as specified and required Angles, clamps, lugs etc. for supporting insulation Weather hoods
- (d) Any other material as may be required for making the insulation complete.

### 5.2.1. **CODES AND STANDARDS**

The supply and application of thermal insulation and finishing covered under this specification shall comply with all currently applicable statutes, regulations and safety codes in the locality where it is to be applied. The materials and application shall also conform to the latest editions of the codes and standards listed. Nothing in this specification shall be construed to relieve the CONTRACTOR of this responsibility.

**5.2.2.1.** The following are some of the codes and standards relevant to this specification :

|          |                                                                                             |
|----------|---------------------------------------------------------------------------------------------|
| IS 277   | <i>Galvanised Steel Sheets (Plain and Corrugated)</i>                                       |
| IS 737   | <i>Wrought Aluminum and Aluminum Alloy Sheet and Strip for General Engineering Purposes</i> |
| IS 3144  | <i>Mineral Wool Thermal Insulation Materials - Method of Test</i>                           |
| IS 3677  | Unbounded Rock and Slag Wool for Thermal Insulation                                         |
| IS 4671  | Expanded Polystyrene for Thermal Insulation Purposes                                        |
| IS 8183  | Bonded Mineral Wool                                                                         |
| IS 9842  | Preformed Fibrous Pipe Insulation                                                           |
| IS 14164 | Industrial Application and Finishing of Thermal Insulation                                  |

Materials at Temperatures above (-) 80°C and up to (+) 750°C

|         |                                                                                                                       |
|---------|-----------------------------------------------------------------------------------------------------------------------|
| BS 3927 | Rigid Phenolic Foam (PF) for Thermal Insulation in the Form of Slabs and Profiled Sections                            |
| BS 5608 | Preformed Rigid Polyurethane (PUR) and Polyisocyanurate (PIR) Foams for Thermal Insulation of Pipe work and Equipment |
| BS 5970 | Thermal Insulation of Pipe work and Equipment (in the Temperature Range (-) 100°C to (+) 870°C )                      |

## 5.2.2. MATERIALS

### 5.2.3.1. GENERAL

All materials shall be new and fresh, incombustible, fire retardant, rot-proof, non-hygroscopic, vermin proof, fungus proof, non-injurious to health, chemically inert, non-corrosive to steel and aluminum (even if soaked in water for extended periods) and shall be guaranteed to withstand continuously and without deterioration the minimum and maximum temperatures to which these shall be subjected to under the specified applications.

5.2.3.2. The insulation materials and any component of the finished insulation job shall not react chemically, singly or in combination, with water or moisture to form substances that are more actively corrosive to applied surface than water or moisture alone.

5.2.3.3. In order to protect the workers from the hazards of insulation materials, suitable protective gadgets shall be provided. Required safety precautions shall be taken during handling and application of insulation.

5.2.3.4. The insulation material shall be kept dry at all times during transport, storage and installation. Decking and covering tarpaulins alone are not adequate for any length of time and shall not be allowed except in extreme emergencies and only for short period. Stacking of insulation materials directly on ground shall not be done. No wet insulation shall be installed. If wet insulation is present, it shall be removed and replaced with new dry insulation. The insulation may be protected with plastic film but shall be vented to prevent sweating.

### 5.2.3. INSULATION MATERIALS

The insulation material shall be one or more of the following types as specified in data sheet A.

| SL. | INSULATION MATERIAL | STANDAR | DENSIT | TEMP. | MATERIA |
|-----|---------------------|---------|--------|-------|---------|
|-----|---------------------|---------|--------|-------|---------|

| NO. |                                             | D       | Y, Kg/M <sup>3</sup> | RANGE, °C     | L CODE   |
|-----|---------------------------------------------|---------|----------------------|---------------|----------|
| 1.  | Fire-retardant quality expanded polystyrene | IS 4671 | 20                   | (-)80 to 80   | EP       |
| 2.  | Rigid polyurethane / Polyisocyanurate foam  | BS 5608 | 32                   | (-)80 to 110  | PUR/ PIR |
| 3.  | Phenolic foam                               | BS 3927 | 32                   | (-)80 to 130  | PF       |
| 4.  | Lightly resin-bonded glass wool mattresses  | IS 8183 | 32                   | (-)40 to 230  | LRG      |
| 5.  | Resin-bonded glass wool pipe sections       | IS 9842 | 85                   | (-)40 to 230  | PSG      |
| 6.  | Unbounded rock and slag wool                | IS 3677 | 150                  | (-) 80 to 230 | U150     |

#### 5.2.4.1. INSULATION ADHESIVES

The insulation adhesive shall be one or more of the following types as specified in data sheet A.

|   | <b><i>Material Description</i></b>                                                                                                                                                                                                                                                        | <u>Material Code</u> |
|---|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| 1 | Hot bitumen of grade 85/25 or 85/40 conforming to IS 702 shall be uniformly applied at 1.5 Kg/M <sup>2</sup> on the surface to be insulated. A similar layer shall also be applied on the inside surface of the insulation. This material shall not be used for stainless steel surfaces. | BIT                  |
| 2 | CPRX compound shall be uniformly applied at 1.5 Kg/M <sup>2</sup> on the surface to be insulated. A similar layer shall also be applied on the inside surface of the insulation. This material shall not be used for stainless steel surfaces.                                            | CPRX                 |
| 3 | MAS 83 with 0.5 mm wet film thickness shall be uniformly applied at 0.5 lit/M <sup>2</sup> by trowelling. MAS 83 shall not be used with polystyrene as insulation material. MAS 83 can be used only between (-) 46 and (+) 149°C.                                                         | MAS 83               |

#### 5.2.4.2. VAPOUR BARRIERS

The vapor barrier shall be one or more of the following types as specified in data sheet A.

|    | <b>Material Description</b>                                                                                                                                                                                                                                                                                                                          | <u>Material Code</u> |
|----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| .1 | Hot bitumen of grade 85/25 or 85/40 conforming to IS 702 shall be uniformly applied at 2.5 Kg/M <sup>2</sup> on the outer surface of insulation and allowed to dry. Reinforced Plastic (RP) tissue paper shall be applied on the dried bitumen. This material shall not be used for stainless steel surfaces.                                        | VB1                  |
| 2  | 0.1 mm thick factory-laminated aluminum foil with craft paper shall be provided. All joints shall be provided with 50 mm overlap and all joints shall be sealed with aluminum tape. For temperature between (-) 43 and (+) 149°C MAS 35 may also be used as sealant.                                                                                 | ALF                  |
| 3  | MAS 130 with 1.02 mm wet film thickness primer coat at 1.0 lit/M <sup>2</sup> and 2.25 mm wet film thickness finish coat at 2.5 lit/M <sup>2</sup> shall be uniformly applied over the insulation by spatula or trowelling. MAS 130 shall not be used with polystyrene as insulation material. MAS 130 can be used only between (-) 40 and (+) 60°C. | MAS 130              |

#### 5.2.4.3. FINISHING MATERIALS

The finishing material shall be one or more of the following types as specified in data sheet A.

| <b>Material Description</b>                                                                                                    |                                                                    | <u>Material Code</u> |
|--------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|----------------------|
| Portland cement and inorganic fiber with water proofing compound at an application density of 1050 to 1100 Kg/M <sup>3</sup> . |                                                                    | FC                   |
| Aluminum sheet as per IS 737, designation 31000, condition H3.                                                                 |                                                                    | AL1                  |
| (a)                                                                                                                            | Insulation outside diameter above 450 mm - sheet thickness 18 SWG  |                      |
| (b)                                                                                                                            | Insulation outside diameter 150 to 450 mm - sheet thickness 20 SWG |                      |
| <b>Material Description</b>                                                                                                    |                                                                    | <u>Material Code</u> |
| (c)                                                                                                                            | Insulation outside diameter below 150 mm - sheet thickness 22 SWG  |                      |
| (d)                                                                                                                            | Air-conditioning ducts - sheet thickness 24 SWG                    |                      |
| (e)                                                                                                                            | Equipment - sheet thickness 18 SWG                                 |                      |

|          |                                                           |                                                                    |     |
|----------|-----------------------------------------------------------|--------------------------------------------------------------------|-----|
| 5.2.4.4. | Galvanized Steel (GS) sheet as per IS 277, designation GP |                                                                    | GS1 |
|          | (a)                                                       | Insulation outside diameter above 450 mm - sheet thickness 20 SWG  |     |
|          | (b)                                                       | Insulation outside diameter 150 to 450 mm - sheet thickness 22 SWG |     |
|          | (c)                                                       | Insulation outside diameter below 150 mm - sheet thickness 24 SWG  |     |
|          | (d)                                                       | Air-conditioning ducts - sheet thickness 26 SWG                    |     |
|          | (e)                                                       | Equipment- sheet thickness 20 SWG                                  |     |

|          |                                                                                                                                                                                                                                                                                                                      |         |
|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| 5.2.4.5. | MAS 134 with 1.0 mm wet film thickness at 1.0 lit/M <sup>2</sup> shall be uniformly applied when using over porous insulation materials. Wet film thickness shall be 0.5 mm at 0.5 lit/M <sup>2</sup> for impervious insulation surfaces including polystyrene. MAS 134 can be used only between (-)18 and (+) 82°C. | MAS 134 |
|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|

#### 5.2.4. AUXILIARY MATERIALS

##### Binding and Lacing Wires

Binding and lacing wire shall be annealed GS 24 SWG.

##### 5.2.5.1. Wire Netting

Wire netting shall be with GS 24 SWG wire and 20 mm hexagonal opening.

##### 5.2.5.2. Bands

- |     |                                     |   |                                                |
|-----|-------------------------------------|---|------------------------------------------------|
| (a) | For securing insulation material    | : | 24 SWG GS, 20 mm wide                          |
| (b) | For securing aluminum and GS sheets | : | 24 SWG anodised aluminum or SS 304, 20 mm wide |

##### 5.2.5.3. Screws



Screws shall be of self-tapping type and shall be of aluminum or stainless steel for aluminum sheets and GS for GS sheets.

#### **5.2.5.4. Pop Rivets**

Pop rivets shall be of aluminum or stainless steel for aluminum sheets and GS for GS sheets.

### **5.2.5. APPLICATION**

#### **5.2.6.1. GENERAL**

The application of insulation shall be made in a professional manner. The insulation shall be applied to all surfaces when these are at ambient temperature. Ample provision shall be made for the maximum possible thermal movement and the insulation shall be applied in a manner which shall avoid breaking or telescoping due to alternate periods of contraction and expansion. A single layer of insulation shall not be more than 75 mm thick.

**5.2.6.2.** Insulation shall be applied after all leak tests on equipment and piping is over and the section of the plant has been specifically released by the PURCHASER for such work. If insulation has to be applied before the leak test, all welded and flanged joints shall be left exposed and insulated after satisfactory completion of the leak test.

**5.2.6.3.** All surfaces to be insulated shall be clean and dry before the insulation is applied. The surfaces shall be cleaned of all foreign material such as scale, dirt, rust and paint, by the use of steel wire brushes and steel scrapers, where necessary. Where a surface is not free of paint the CONTRACTOR shall notify the PURCHASER of the condition for remedial action. The insulation shall be applied after remedial action, suggested by the PURCHASER, has been taken by the CONTRACTOR. One coat of primer paint shall be applied and allowed to dry before application of insulation.

**5.2.6.4.** After cleaning and application of one coat of primer paint on the surface to be insulated, the insulation adhesive shall be applied for fluid operating temperatures between 20<sup>0</sup>C and (-) 20<sup>0</sup>C. Insulation material of required thickness shall be stuck to the surface with joints staggered. The adjoining sections shall be tightly pressed together. All the joints shall be sealed with adhesive material. Voids, if any, shall be packed with suitably cut pieces of insulation material. Vapor barrier and insulation finish shall be applied as per pares 3.4 and 3.5 or 4.5 respectively.

**5.2.6.5.** For fluid operating temperatures below (-) 20<sup>0</sup>C, the insulation shall be applied directly over the surface to be insulated without applying the insulation adhesive. Vapor barrier shall be applied over the insulation material. Vapor barrier and insulation finish shall be applied as per pares 3.4 and 3.5 or 4.5 respectively.

- 5.2.6.6. Where multilayer insulation is provided, insulation adhesive shall be used between two layers, based on temperature criterion given in Para 4.1.4.
- 5.2.6.7. If aluminium or GS sheet is specified as finishing material, all joints shall be sealed with bitumastic paint and made effectively weather and water-proof. For temperatures between (-) 40 and (+) 120°C, MAS 94 may also be used as sealant. MAS 94 shall, however, not be used with polystyrene as insulation material. All flat surfaces shall be adequately sloped to prevent pools of water collecting. The sheet shall be protected internally with 2 coats of bitumastic paint.
- 5.2.6.8. All actions shall be taken to complete the application of finishing on exposed surfaces covered with insulation before closing the day's work. If this is not practicable, adequate precautions shall be taken to protect the insulation from weather, for example by wrapping it with polythene sheet, roofing felt or other approved material.

#### **5.2.6. PIPES, PIPE FITTINGS, VALVES AND SPECIALITIES**

- 5.2.7.1. All vertical pipes shall be provided with suitable insulation supports to prevent the insulation from collapsing due to its own weight. Any welding required, shall be carried out by the CONTRACTOR with the prior permission of the PURCHASER and only under his direct supervision. Where welding is not permitted, suitable clamped supports shall be used. The insulation shall be applied starting from bottom up. Mattress type insulation materials shall be clamped from top.
- 5.2.7.2. All pipe fittings, valves and specialties shall be covered with the same type and thickness of insulation as specified for the adjoining pipe. On pipe fittings, insulation outside diameter shall be same as the outside diameter of adjacent pipe insulation. Unless specified otherwise in section C, valves and specialties of sizes 100 mm NB and larger shall be provided with removable box type insulation. Box shall be fabricated from sheet material specified for adjoining pipes. Pipe insulation on adjoining flanges shall be stopped at one bolt length plus 25 mm before flange to permit removal of the bolts and nuts. The insulation shall be applied after the finish has been applied over insulation on the adjacent piping. Flanged joints shall also be insulated with removable type of boxes. Arrangement shall be similar to that for valves.
- 5.2.7.3. The sheets shall be installed with the longitudinal lap joints at 45° below the horizontal for horizontal pipes and the joints sealed with bitumastic paint.
- 5.2.7.4. On vertical pipes the sheets shall be applied working from bottom up. Each section of sheets shall have a minimum overlap of 50 mm longitudinally and circumferentially. Each circumferential joint shall be made weather-proof by securing with a band of sheet material and sealing with bitumastic paint. Longitudinal lap joints shall be fixed with screws or pop rivets at approximately 150 mm centers.
- 5.2.7.5. Valves shall be insulated up to and including their bonnet flange.

Insulation of pipe hanger clamps shall be as per spec.

5.2.7.6. Weather hoods shall be provided for insulated piping passing through roof and external walls.

#### **5.2.7. EQUIPMENT**

5.2.8.1. Where the insulation material is in the mattress form, cleats in the form of wire nails or nuts or angles and flats for supporting the insulation material, shall be welded to the equipment by others. If wire nails are to be used as insulation cleats, these shall be bent and secured with the metal fabric of the mattress, after the insulation has been applied. Where insulation cleats are in the form of M6 and M10 nuts, the CONTRACTOR shall supply and install bolts of suitable length for fixing the insulation. The insulation applied to equipment shall be reinforced with wire netting. One course of wire netting shall be applied to the surface of the equipment and each layer of insulation shall be backed up with wire netting. All irregularities of the surface shall be filled and levelled over with insulating cement. All mattress joints shall be butted tightly and the mattresses shall be secured with 20 mm wide 24 SWG GS bands at 450 mm centers. After banding, all mattress edges shall be laced tightly.

5.2.8.2. All equipment, unless specified otherwise, shall have a smooth aluminum or GS sheet finish as specified in data sheet A, applied in a manner similar to that specified for piping. For fixing of aluminum or GS sheets, wooden spacer rings at 1000 mm centers shall be fixed to the equipment by the CONTRACTOR. All vertical and horizontal sheets shall be overlapped a minimum of 75 mm. The lapped joints of adjoining sections of sheets shall be secured with screws or pop rivets. On all equipment above 2500 mm diameter and flat surfaces, the sheet shall be further secured by circumferential bands at approximately 1000 mm centers. Each sheet joint shall be sealed with bitumastic paint. The roof sections shall overlap the side walls to prevent water seepage between insulation and the equipment wall. Side wall sheets shall be securely banded at intersections of the side wall and roof sections.

5.2.8.3. All equipment manholes, hatches, bolted or screwed cover plates, flanged ends etc. shall have removable box type insulation, with same thickness of insulation as for adjacent surfaces. Insulation adjoining such equipment openings shall be tapered towards these openings to permit removal of bolts, screws, heads, covers or plates with no damage to adjacent surface insulation or cover.

5.2.8.4. Nozzles and other connections on tanks and other equipment shall be insulated in the same manner as the pipes.

5.2.8.5. Pump casing shall be completely insulated with removable type of boxes fabricated from the specified sheet material. Proper care shall be taken to maintain continuity of vapor barrier between static and removable portion of insulation.

5.2.8.6. Name plates on equipment shall not be insulated. Proper care shall be taken to eliminate seepage of moisture from such un-insulated portions into the insulating material.

**5.2.8.7. CONTRACTION JOINTS IN INSULATION**

Depending on the type of insulation material used and the operating temperature, contraction joints shall be provided for equipment or pipes to prevent rupturing or buckling when the cold surface contracts.

**5.2.8. CEMENT SAND PLASTER FINISH**

Where cement sand plaster finish is specified following procedure shall be followed :

**5.2.9.1. Indoor Application**

After the application of hot bitumen or CPRX compound vapor barrier, the surface shall be wrapped with GS wire netting, butting all the joints and lacing down with lacing wire. The ends of all wire loops shall be firmly twisted together with pliers, bent over and carefully pressed into the surface of insulation.

A total of 15 mm thick finishing cement sand(1:4) plaster shall be applied in two layers after a GS wire netting is stretched over the entire surface of insulation material and securely fastened down. The plaster shall be hand- trowelled over the wire netting to a smooth finish. The application of finishing plaster shall be terminated, at the end of day's work, at a contraction joint.

**5.2.9.2. Outdoor Application**

After the application of the plaster as per procedure for indoor application, an additional 6 mm thick water-proofing compound Shalikote 30 or equivalent shall be applied in two layers. Outdoors, the finishing plaster shall be applied immediately after application of insulation. If this is not practicable, the CONTRACTOR shall take adequate precautions to protect the insulation from weather, e.g. by wrapping it with polythene sheet, roofing felt or other approved material.

5.2.9.3. The cement sand plaster finish shall have the following properties :

- (a) A light shower of rain, falling immediately after application shall not wash off the plaster.
- (b) At any time, one week or more after application, it shall not shatter if struck a sharp blow with a 0.7 Kg hammer. Such a blow may damage the finishing locally but shall not cause large pieces to break away.
- (c) When set, it shall withstand prolonged exposure to the weather without additional protection.

**5.2.9.4. DUAL TEMPERATURE INSULATION**

For dual temperature application, resin-bonded glass wool or unbounded rock or slag wool thermal insulation shall be provided, depending on the lower temperature limit

given in Para 3.2. Insulation thicknesses shall be as indicated in Insulation Schedule (Equipment) and Insulation Schedule (Piping). The insulation application procedure shall be same as that for cold surfaces.

#### **5.2.9. MEASUREMENT**

**5.2.10.1.** Measurement of insulation over equipment and piping shall be as per IS 14164.

**5.2.10.2.** Measurement for air-conditioning ducts shall be taken over finished insulation surface and 5% additional area shall be considered to account for reinforcement and flanged angle joints.

#### **5.2.10. MISCELLANEOUS**

Approval of the PURCHASER shall be obtained of samples of all materials and necessary test certificates of approved national laboratories, before dispatching these to site. Insulation shall not be applied until specific release is given by the PURCHASER.

## DATA SHEET - A

|                                                           |  |                                                                 |
|-----------------------------------------------------------|--|-----------------------------------------------------------------|
| 1. AMBIENT TEMPERATURE :<br>40 °C                         |  | 13.                                                             |
| 2.                                                        |  | 14.                                                             |
| 3.                                                        |  | 15.                                                             |
| 4.                                                        |  | 16.                                                             |
| 5.                                                        |  | 17.                                                             |
| 6. INSULATION MATERIALS                                   |  | 18.                                                             |
| 6.1 EQUIPMENT:<br>EP/PUR/PIR/PF/LRG/U150                  |  | 19.                                                             |
| 6.2 PIPING SYSTEMS :<br>EP/PUR/PIR/PF/LRG/<br>PSG/U150    |  | 20.                                                             |
| 6.3 AIR-CONDITIONING DUCT :<br>EP/PUR/<br>PIR/PF/LRG/U150 |  | 21.                                                             |
| 6.4                                                       |  | 22.                                                             |
| 6.5                                                       |  | 23.                                                             |
| 7. INSULATION ADHESIVES :<br>BIT/CPRX/<br>MAS 83          |  | 24.                                                             |
| 8. VAPOUR BARRIERS :<br>VB1/ALF/MAS 130                   |  | 25.                                                             |
| 9. FINISHING MATERIALS                                    |  | 26.                                                             |
| 9.1 EQUIPMENT :<br>FC/AL1/GS1/MAS 134                     |  | 27.                                                             |
| 9.2 PIPING SYSTEMS:FC/AL1/GS1/MAS 134                     |  | 28.                                                             |
| 9.3 AIR-CONDITIONING DUCT :<br>FC/AL1/                    |  | 29.                                                             |
|                                                           |  | 30. TEST CERTIFICATES FOR ALL<br>MATERIALS REQUIRED :<br>YES/NO |
|                                                           |  | 31.                                                             |
| 9.4                                                       |  | 32.                                                             |
| 9.5                                                       |  | 33.                                                             |
| 10. INSULATING CEMENT MATERIAL:                           |  | 34.                                                             |
| SAME AS THE BASIC INSULATION MATERIAL                     |  | 35.                                                             |
|                                                           |  | 36.                                                             |

| INSULATION THICKNESSES IN mm FOR INSULATION MATERIALS EP, LRG AND PSG |                |          |         |          |           |           |           |           |           |           |        |
|-----------------------------------------------------------------------|----------------|----------|---------|----------|-----------|-----------|-----------|-----------|-----------|-----------|--------|
| OPERATING<br>TEMP. °C                                                 | AM<br>B.<br>TO | 19<br>TO | 9<br>TO | -1<br>TO | -11<br>TO | -21<br>TO | -31<br>TO | -41<br>TO | -51<br>TO | -61<br>TO | -71 TO |
| PIPE SIZE<br>mm                                                       | 20             | 10       | 0       | -10      | -20       | -30       | -40       | -50       | -60       | -70       | -80    |
| 15                                                                    | 25             | 25       | 40      | 50       | 50        | 65        | 75        | 100       | 100       | 125       | 150    |
| 20                                                                    | 25             | 25       | 40      | 50       | 50        | 75        | 75        | 100       | 100       | 125       | 150    |
| 25                                                                    | 25             | 25       | 40      | 50       | 65        | 75        | 100       | 100       | 125       | 125       | 150    |
| 40                                                                    | 25             | 40       | 50      | 65       | 75        | 100       | 100       | 100       | 125       | 125       | 150    |
| 50                                                                    | 25             | 40       | 50      | 65       | 75        | 100       | 100       | 100       | 125       | 150       | 175    |
| 65                                                                    | 40             | 40       | 50      | 75       | 75        | 100       | 100       | 125       | 125       | 150       | 175    |
| 80                                                                    | 40             | 40       | 50      | 75       | 75        | 100       | 100       | 125       | 125       | 150       | 175    |
| 100                                                                   | 40             | 50       | 50      | 75       | 100       | 100       | 125       | 125       | 150       | 150       | 175    |
| 125                                                                   | 50             | 50       | 50      | 75       | 100       | 100       | 125       | 150       | 150       | 175       | 200    |
| 150                                                                   | 50             | 50       | 75      | 75       | 100       | 125       | 125       | 150       | 150       | 175       | 200    |
| 200 AND ABOVE<br>AND FLAT<br>SURFACES                                 | 50             | 65       | 100     | 125      | 150       | 175       | 200       | 200       | 225       | 250       | 275    |

**DATA SHEET –B**

| SL. NO. | ITEM                                                                                                                         |                   |                              |
|---------|------------------------------------------------------------------------------------------------------------------------------|-------------------|------------------------------|
| 1.      | INSULATION MATERIALS                                                                                                         |                   |                              |
| 1.1     | EQUIPMENT                                                                                                                    |                   | EP/PUR/PIR/PF/LRG/U150       |
| 1.2     | PIPING SYSTEMS                                                                                                               |                   | EP/PUR/PIR/PF/LRG/PSG/U150   |
| 1.3     | AIR-CONDITIONING DUCT                                                                                                        |                   | EP/PUR/PIR/PF/LRG/U150       |
| 2       | INSULATION ADHESIVES                                                                                                         |                   | BIT/CPRX/MAS 83              |
| 3.      | VAPOUR BARRIERS                                                                                                              |                   | VB1/ALF/MAS 130              |
| 4.      | FINISHING MATERIALS                                                                                                          |                   |                              |
| 4.1     | EQUIPMENT                                                                                                                    |                   | FC/FAL1/GS1/MAS 134          |
| 4.2     | PIPING SYSTEMS                                                                                                               |                   | FC/FAL1/GS1/MAS 134          |
| 4.3     | AIR-CONDITIONING DUCT                                                                                                        |                   | FC/FAL1/GS1/MAS 134          |
| 5.0     | DENSITY OF EACH OF THE INSULATING MATERIALS                                                                                  | Kg/M <sup>3</sup> |                              |
| 6.0     | IS ANY INSULATION MATERIAL CORROSIVE TO CARBON STEEL OR ALLOY STEEL SURFACE IN CONTACT                                       |                   | YES / NO                     |
| 7.0     | INSULATION THICKNESSES FOR ALL INSULATION MATERIALS SELECTED, IN THE FORMAT SIMILAR TO THAT IN DATA SHEET A, TO BE ENCLOSED. |                   | WHETHER ENCLOSED<br>YES / NO |



### 5.3 AXIAL FANS FOR VENTILATION SYSTEM

#### 5.3.0. SCOPE

This specification covers the general design, materials, construction features, manufacture, shop inspection and testing at manufacturer's works, delivery at site, handling at site, erection, testing, commissioning, performance testing and handing over of Axial Fans for Ventilation System.

#### 5.3.1. CODES AND STANDARDS

The design, materials, construction, manufacture, inspection, testing and performance of axial fans shall comply with all currently applicable statutes, regulations and safety codes in the locality where the equipment is to be installed. The equipment shall also conform to the latest applicable Indian or equivalent standards. Other international standards are also acceptable, if these are established to be equal or superior to the listed standards. Nothing in this specification shall be construed to relieve the VENDOR / CONTRACTOR of this responsibility.

#### 5.3.2. CONSTRUCTION FEATURES

##### 5.3.3.1. CASING

Casing shall be provided with suitable supports. Access door shall be provided in the casing for easy access to motor and impeller. Suitable arrangement for mounting of motors shall be provided.

##### 5.3.3.2. IMPELLER

The impeller shall have blades of an airfoil design. Blades shall be mounted on streamlined hub. Impeller with fabricated blades are acceptable up to 450 mm impeller diameter. The impeller shall be statically and dynamically balanced. Adjustable pitch blades shall be provided if specified in data sheet A.

##### 5.3.3.3. GENERAL

Guide vanes shall be provided on the discharge side for vane axial fans.

Belt driven fans shall be provided with V- belts, V-belt pulleys and belt guards.

Pulleys shall have minimum two(2) grooves to prevent start-up failure and premature belt failure. Pulleys shall be statically and dynamically balanced. Belts shall have a minimum service factor of 1.5.

Common base frame for belt driven fans shall be with adjustable rails for motors.

Bolts, nuts and washers used shall be of non-corrosive material and of superior quality.

Bearings shall have minimum life of 50,000 hours.

#### **5.3.3.4.DRIVE MOTOR**

Drive motor shall be rated at least 15 % higher than the power requirement at duty point or 10 % higher than the maximum power requirement at selected speed, whichever is higher. Starting torque requirements of fan shall also be considered while selecting the motor.

#### **5.3.3.5.NOISE AND VIBRATION**

Noise level produced by any rotating equipment individually or collectively shall not exceed 85 dB(A) measured at a distance of 1.5 metres from the source in any direction. The overall vibration level shall be as per zones A and B of ISO 10816-1. Balance quality requirement shall be G 6.3 conforming to ISO 1940/1.

#### **5.3.3.6.PERFORMANCE GUARANTEES**

Performance parameters to be guaranteed by the VENDOR/ CONTRACTOR and tolerances permitted shall be as indicated in section C and / or data sheet A. BIDDER shall confirm acceptance of these by indicating values in data sheet B. Fan or any portion thereof is liable for rejection, if it fails to give any of the guaranteed performance parameters.

#### **DATA SHEET – A**

| GENERAL |                                                 |   |                                                |
|---------|-------------------------------------------------|---|------------------------------------------------|
| 1       | DESIGNATION : AXIAL FANS FOR VENTILATION SYSTEM | 5 | DUTY : CONTINUOUS / INTERMITTENT<br>24 Hrs/Day |
| 1.1     | FOR NORMAL VENTILATION: YES/                    | 6 | LOCATION IN HAZARDOUS AREA :                   |

|             |                                                              |      |                                                                                     |
|-------------|--------------------------------------------------------------|------|-------------------------------------------------------------------------------------|
|             | NO                                                           |      | YES / NO                                                                            |
| 1.2         | FOR VENTILATION UNDER FIRE:<br>YES/ NO                       | 7    | HAZARDOUS AREA CLASSIFICATION<br>AS PER IS 5572 ZONE 0 / 1 / 2                      |
| 2           | NUMBER REQUIRED : TABLE GIVEN<br>BELOW 1                     | 8    |                                                                                     |
| 3           | TAG NUMBERS: TABLE GIVEN<br>BELOW 1                          | 9    |                                                                                     |
| 4           | LOCATION : INDOOR / OUTDOOR                                  | 10   |                                                                                     |
| DESIGN DATA |                                                              |      |                                                                                     |
| 11          | CAPACITY AT SUCTION<br>CONDITIONS                            | 15   | MAXIMUM FAN SPEED                                                                   |
| 11.1        | NORMAL :<br>M3/Hr                                            | 15.1 | FOR IMPELLER DIAMETER 450 mm AND<br>LESS : 1500 RPM                                 |
| 11.2        | MINIMUM : 11050<br>M3/Hr                                     | 15.2 | FOR IMPELLER DIAMETER ABOVE<br>450 mm : 1000 RPM                                    |
| 11.3        | MAXIMUM : F<br>M3/Hr                                         | 16   | DESIGN AMBIENT TEMPERATURE: 40 <input type="checkbox"/>                             |
| 12          | FLUID HANDLED :GAS/AIR                                       | 17   | ELEVATION ABOVE MEAN SEA LEVEL :<br>233 M                                           |
| 13          | FLUID CONDITION AT SUCTION                                   | 18   | FAN POSITION: VERTICAL/ HORIZONTAL                                                  |
| 13.1        | TEMPERATURE : 28 <input type="checkbox"/> C                  | 19   | FIRE RATING: ( ONLY FOR FIRE<br>APPLICATION )                                       |
| 13.2        | RELATIVE HUMIDITY : 60 %                                     | 19.1 | TEMPERATURE (MAX): 250 <input type="checkbox"/> C F                                 |
| 13.3        | DENSITY : 1.2 Kg/M3                                          | 20   |                                                                                     |
| 14          | STATIC PRESSURE :<br>35 mmWC                                 | 21   |                                                                                     |
| 22          | TYPE : VANE AXIAL / TUBE AXIAL /<br>PROPELLER                | 28   | FIRE RESISTANT PAINT: YES / NO                                                      |
| 23          | SPARK RESISTANT CONSTRUCTION<br>TYPE AS PER AMCA : A / B / C | 29   | FAN MOTOR ASSEMBLY- STATICALLY /<br>DYNAMICALLY BALANGED AS PER<br>AMCA-204: YES/NO |
| 24          | DRIVE : DIRECT / BELT                                        | 30   |                                                                                     |
| 25          | ADJUSTABLE PITCH BLADES REQUIRED<br>: YES<br><br>/ NO        | 31   |                                                                                     |
| 26          | TYPE OF MOUNTING :<br>FLOOR / WALL / IN DUCT                 | 32   |                                                                                     |

|                                          |                                                         |      |                                                                                                 |
|------------------------------------------|---------------------------------------------------------|------|-------------------------------------------------------------------------------------------------|
| 27                                       | PAINTING : MANUFACTURER'S STANDARD / EPOXY PAINTED      | 33   |                                                                                                 |
| MATERIALS OF CONSTRUCTION                |                                                         |      |                                                                                                 |
| 34                                       | CASING : CS /                                           | 38   | OUTLET CONE :                                                                                   |
| 35                                       | IMPELLER : CS / CAST AL /                               | 39   | GUIDE VANE :                                                                                    |
| 36                                       | SHAFT : EN 8 /                                          | 40   |                                                                                                 |
| 37                                       | INLET CONE OR BELL :                                    | 41   |                                                                                                 |
| ACCESSORIES                              |                                                         |      |                                                                                                 |
| 42                                       | FLEXIBLE CONNECTION AT FAN INLET / OUTLET : YES / NO    | 49   | WOODEN BLOCK FOR MOUNTING : YES / NO                                                            |
| 43                                       | TYPE OF FLEXIBLE CONNECTION: NORMAL / FIRE PROOF        | 50   | COMMON BASE FRAME OR SUPPORTING FRAME FOR MOUNTING: YES / NO                                    |
| 44                                       | VOLUME CONTROL DAMPERS AT FAN INLET / OUTLET : YES / NO | 51   | NEOPRENE RUBBER PADS : YES / NO                                                                 |
| 45                                       | INLET GUARD : YES / NO                                  | 52   | FOUNDATION BOLTS: YES/NO                                                                        |
| 46                                       | INLET CONE OR BELL AND OUTLET CONE : YES / NO           | 53   | VIBRATION ISOLATORS : YES / NO                                                                  |
| 47                                       | LOUVERED SHUTTERS : YES / NO                            | 54   | RIBBED NEOPRENE RUBBER PADS BETWEEN FOUNDATION BLOCK AND FLOOR FOR FLOOR MOUNTED FANS: YES / NO |
| 48                                       | WALL COWL WITH BIRD SCREEN: YES / NO                    | 55   |                                                                                                 |
| SERVICES                                 |                                                         |      |                                                                                                 |
| 56                                       | ERECTION : YES / NO                                     | 58   | TESTING AND COMMISSIONING : YES / NO                                                            |
| 57                                       | ERECTION SUPERVISION : YES / NO                         | 59   |                                                                                                 |
| ELECTRICAL                               |                                                         |      |                                                                                                 |
| 60                                       | MOTORS: BY CONTRACTOR/ PURCHASER                        | 61   | STARTERS : BY CONTRACTOR / PURCHASER                                                            |
| SPARES AND MAINTENANCE TOOLS AND TACKLES |                                                         |      |                                                                                                 |
| 62                                       |                                                         | 63.3 |                                                                                                 |
| 63                                       | ESSENTIAL SPARES                                        | 63.4 |                                                                                                 |

|                          |                                                                                     |      |                                             |
|--------------------------|-------------------------------------------------------------------------------------|------|---------------------------------------------|
| 63.1                     |                                                                                     | 63.5 |                                             |
| 63.2                     |                                                                                     | 63.6 |                                             |
| TESTS AND INSPECTION     |                                                                                     |      |                                             |
| 64                       |                                                                                     | 65   |                                             |
| CODES AND STANDARDS      |                                                                                     |      |                                             |
| 66                       | FOR DESIGN, TESTING AND INSPECTION : IS 2312, IS 3588, AMCA 203, AMCA 210, AMCA 300 | 68   |                                             |
| 67                       |                                                                                     | 69   |                                             |
| PERFORMANCE GUARANTEES   |                                                                                     |      |                                             |
| 70                       | CAPACITY AT SUCTION CONDITIONS<br>(+) 10 % (-) ZERO M3/Hr                           | 72   | POWER CONSUMPTION :<br>(+) ZERO (-) 10 % KW |
| 71                       | STATIC PRESSURE :<br>(+) 5 % (-) ZERO mmWC                                          | 73   |                                             |
| COST LOADING AND PENALTY |                                                                                     |      |                                             |
| 74                       | POWER CONSUMPTION :<br>Rs. / KW                                                     | 76   |                                             |

Axial Fan Details:

|                                     |               |               |      |                 |              |      |             |
|-------------------------------------|---------------|---------------|------|-----------------|--------------|------|-------------|
| ADMIN BLOCK -<br>Ventilation-Mumbai |               |               |      |                 |              |      |             |
| GROUND FLOOR                        | Area<br>(Sqm) | Height<br>(m) | ACPH | SLELCTED<br>CMH | EACH<br>UNIT | QTY. | FAN<br>TYPE |
| EMI/EMC 3M                          | 347.4         | 4             | 6    | 8500            | 1000         | 9    | prop        |
| CANTEEN SEATING<br>AREA             | 137.8         | 4             | 15   | 8500            | 1000         | 9    | prop        |
| KITCHEN                             | 18.3          | 4             | 30   | 2300            | 2300         | 1    | scrubber    |
| ELECTRICAL RM                       | 8.0           | 4             | 15   | 500             | 500          | 1    | Inline      |
| COMPRESSOR RM                       | 10.3          | 4             | 15   | 700             | 700          | 1    | prop        |
| LADIES TOILET                       | 7.9           | 4             | 6    | 200             | 200          | 1    | prop        |
| GENTS TOILET                        | 10.6          | 4             | 6    | 300             | 150          | 2    | prop-2      |
|                                     |               |               |      |                 |              |      |             |
|                                     |               |               |      |                 |              |      |             |
| FIRST FLOOR                         |               |               |      |                 |              |      |             |
| STORES                              | 106.6         | 4             | 6    | 2600            | 2600         | 1    | Inline      |
| ELECTRICAL                          | 9.8           | 4             | 15   | 600             | 600          | 1    | prop        |
| LADIES TOILET                       | 7.7           | 4             | 6    | 200             | 200          | 1    | prop        |

|                 |      |   |    |     |     |   |        |
|-----------------|------|---|----|-----|-----|---|--------|
| GENTS TOILET    | 10.1 | 4 | 6  | 300 | 150 | 2 | prop-2 |
| PANTRY          | 7.3  | 4 | 15 | 500 | 300 | 1 | Inline |
| GENTS TOILET    | 14.9 | 4 | 6  | 400 | 400 | 1 | Inline |
| LADIES TOILET-1 | 5.5  | 4 | 6  | 200 | 200 | 1 | prop   |
| TOILET          | 4.3  | 4 | 6  | 150 | 150 | 1 | prop   |
|                 |      |   |    |     |     |   |        |
|                 |      |   |    |     |     |   |        |
| SECOND FLOOR    |      |   |    |     |     |   |        |
| ELECTRICAL RM   | 9.8  | 4 | 15 | 600 | 600 | 1 | prop   |
| LADIES TOILET   | 7.7  | 4 | 6  | 200 | 200 | 1 | prop   |
| GENTS TOILET    | 10.1 | 4 | 6  | 300 | 300 | 1 | prop   |
| GENTS TOILET-1  | 15.5 | 4 | 6  | 400 | 400 | 1 | Inline |
| LADIES TOILET-1 | 5.5  | 4 | 6  | 150 | 150 | 1 | Inline |
|                 |      |   |    |     |     |   |        |
|                 |      |   |    |     |     |   |        |
| THIRD FLOOR     |      |   |    |     |     |   |        |
| ELECTRICAL RM   | 9.8  | 4 | 15 | 600 | 600 | 1 | prop   |
| LADIES TOILET   | 7.7  | 4 | 6  | 200 | 200 | 1 | prop   |
| GENTS TOILET    | 12.5 | 4 | 6  | 300 | 150 | 2 | prop-2 |
| GENTS TOILET-1  | 15.5 | 4 | 6  | 400 | 400 | 1 | Inline |
| LADIES TOILET-1 | 5.5  | 4 | 6  | 200 | 200 | 1 | Inline |

#### DATA SHEET – B

| SL. NO. | BIDDER                     |                    |  |
|---------|----------------------------|--------------------|--|
| 1.      | DESIGNATION                |                    |  |
|         |                            |                    |  |
| 2.      | NUMBER OFFERED             |                    |  |
| 3.      | TAG NUMBERS                |                    |  |
| 4.      | TYPE                       |                    |  |
|         |                            |                    |  |
| 5.      | MAKE AND MODEL NUMBER      |                    |  |
| 6.      | PLACE OF MANUFACTURE       |                    |  |
| 7.      | NORMAL CAPACITY AT SUCTION |                    |  |
|         | CONDITIONS                 | M <sup>3</sup> /Hr |  |
| 8.      | STATIC PRESSURE            | Mm WC              |  |
| 9.      | STATIC EFFICIENCY          | %                  |  |

|      |                                        |                    |  |
|------|----------------------------------------|--------------------|--|
| 10.  | MATERIALS OF CONSTRUCTION              |                    |  |
| 10.1 | CASING                                 |                    |  |
| 10.2 | IMPELLER                               |                    |  |
| 10.3 | SHAFT                                  |                    |  |
| 11.  | IMPELLER DIAMETER                      | mm                 |  |
| 12.  | IMPELLER SPEED                         | RPM                |  |
| 13.  | POWER REQUIREMENT                      |                    |  |
| 13.1 | POWER INPUT TO FAN AT DUTY POINT (BKW) | KW                 |  |
| 13.2 | MAXIMUM POWER REQUIREMENT AT           |                    |  |
|      | SELECTED SPEED                         | KW                 |  |
| 13.3 | MOTOR RATING                           | KW                 |  |
| 13.4 | POWER INPUT TO MOTOR AT DUTY POINT     | KW                 |  |
| 14.  | WEIGHT OF FAN-MOTOR ASSEMBLY           | Kg                 |  |
| 15.  | MINIMUM CAPACITY FOR STABLE            |                    |  |
|      | OPERATION                              | M <sup>3</sup> /Hr |  |
| 16.  | NOISE LEVEL AT 1.5 M DISTANCE FROM FAN | dB(A)              |  |
|      | DOCUMENTS TO BE ENCLOSED               |                    |  |
| 17.  | GENERAL ARRANGEMENT DRAWING WITH       |                    |  |
|      | MAJOR DIMENSIONS                       |                    |  |
| 18.  | PARTS LIST WITH CODES AND MATERIALS    |                    |  |
|      | OF CONSTRUCTION                        |                    |  |
| 19.  | RATING CHARTS OR TABLES WITH           |                    |  |
|      | SELECTION MARKED                       |                    |  |
| 20.  | PERFORMANCE CURVE WITH DUTY POINT      |                    |  |
|      | MARKED                                 |                    |  |
| 21.  | FAN MOUNTING DETAILS WITH WALL         |                    |  |
|      | OPENING REQUIREMENTS                   |                    |  |
| 22.  | RECOMMENDED SPARE PARTS LIST FOR       |                    |  |
|      | 2 YEARS NORMAL OPERATION               |                    |  |
|      | PERFORMANCE GUARANTEES                 |                    |  |
| 23.  | CAPACITY AT SUCTION CONDITIONS         | M <sup>3</sup> /Hr |  |

|     |                   |          |  |
|-----|-------------------|----------|--|
| 24. | STATIC PRESSURE   | Mm<br>WC |  |
| 25. | POWER CONSUMPTION | KW       |  |

#### 5.4 **APPROVED MAKE COMPONENT/EQUIPMENT :**

**NOTE:** LIST OF APPROVED MAKES FOR PRODUCTS AND MATERIALS FOR HVAC SYSTEM ARE INDICATED IN THE TABLE BELOW. HOWEVER, ANY OTHER MAKE WHICH IS EQUIVALENT AND MEETING THE TENDER SPECIFICATIONS ARE ALSO ACCEPTABLE WITH PRIOR APPROVAL OF THE ENGINEER.

| S.No. | Details of Materials / Equipment | Manufacturer     |
|-------|----------------------------------|------------------|
| 1     | Variable Refrigerant Flow System | Daikin           |
|       |                                  | Hitachi          |
|       |                                  | LG               |
|       |                                  | O General        |
|       |                                  | Mitsubishi       |
|       |                                  | Sanyo            |
|       |                                  | Toshiba          |
|       |                                  | Voltas           |
|       |                                  | Blue Star        |
|       |                                  | Carrier          |
| 2     | Air Handling Unit                | Carrier          |
|       |                                  | Ciat             |
|       |                                  | Climaveneta      |
|       |                                  | Euroclima        |
|       |                                  | Novair           |
|       |                                  | Saiver           |
|       |                                  | Trane            |
|       |                                  | VTS              |
|       |                                  | Blue Star        |
|       |                                  | Carrier          |
|       |                                  | Citizen          |
|       |                                  | Edgetech         |
|       |                                  | ETA              |
|       |                                  | ETHOS            |
|       |                                  | Flaktwoods       |
|       |                                  | Nutech           |
|       |                                  | Suvidha – Saiver |
|       |                                  | Voltas           |
|       |                                  | Zeco             |



|   |                                                      |            |
|---|------------------------------------------------------|------------|
| 3 | Split Unit                                           | O General  |
|   |                                                      | Daikin     |
|   |                                                      | Hitachi    |
|   |                                                      | Blue Star  |
|   |                                                      | Carrier    |
|   |                                                      | ETA        |
| 4 | Ductable Split Unit (with Refrigerant R-410A/R-407c) | Voltas     |
|   |                                                      | Toshiba    |
|   |                                                      | Trane      |
|   |                                                      | York       |
|   |                                                      | O General  |
|   |                                                      | Blue Star  |
|   |                                                      | Carrier    |
|   |                                                      | ETA        |
| 5 | Centrifugal Fan                                      | Voltas     |
|   |                                                      | Chaysol    |
|   |                                                      | Comefri    |
|   |                                                      | Flaktwoods |
|   |                                                      | Greenheck  |
|   |                                                      | Wolter     |
|   |                                                      | Blowtech   |
|   |                                                      | Nadi       |
|   |                                                      | Nicotra    |
|   |                                                      | Kruger     |
|   |                                                      | Humidin    |
| 6 | Plug fans                                            | Kruger     |
|   |                                                      | Greenheck  |
|   |                                                      | Wolter     |
| 7 | Axial Flow Fan                                       | Greenheck  |
|   |                                                      | Nicotra    |
|   |                                                      | Nuaire     |
|   |                                                      | Systemair  |
|   |                                                      | Wolter     |
|   |                                                      | Air flow   |
|   |                                                      | Humidin    |
|   |                                                      | Kruger     |
|   |                                                      | Nadi       |
|   |                                                      | Nicotra    |
| 8 | Inline / Propeller Fan / Roof extractor Fan          | Chaysol    |
|   |                                                      | Nuaire     |
|   |                                                      | Ostberg    |
|   |                                                      | Systemair  |
|   |                                                      | Air flow   |
|   |                                                      | Alstom     |

|    |                                                              |                        |
|----|--------------------------------------------------------------|------------------------|
|    |                                                              | Nadi                   |
| 9  | Air washer (Wetting Pad type / Nozzle type scrubber)         | Ambassador             |
|    |                                                              | Emerald                |
|    |                                                              | Humidin                |
|    |                                                              | Roots Air              |
|    |                                                              | Roots Cooling          |
|    |                                                              | Weather Master         |
| 10 | Kitchen Scrubber (Dry Type)                                  | Flanders Air seal      |
|    |                                                              | Trion                  |
| 11 | GI Sheet                                                     | ESSAR                  |
|    |                                                              | Jindal                 |
|    |                                                              | Lloyd                  |
|    |                                                              | SAIL                   |
|    |                                                              | TATA                   |
| 12 | Factory Made Duct                                            | Alpha duct             |
|    |                                                              | Ductofab               |
|    |                                                              | Nuaire Engineers       |
|    |                                                              | Radient air systems    |
|    |                                                              | Rolastar               |
|    |                                                              | Seven star             |
|    |                                                              | Techno Aircon          |
|    |                                                              | Zeco                   |
| 13 | Factory Made Spiral Duct                                     | Atco                   |
|    |                                                              | Karthila Industries    |
|    |                                                              | Seven Star             |
|    |                                                              | Spiral Tubes Pvt. Ltd. |
|    |                                                              | Western Air Duct       |
| 14 | Flexible duct                                                | Atco                   |
|    |                                                              | Caryaire               |
|    |                                                              | Seven star             |
|    |                                                              | UP Twiga               |
| 15 | Pre-insulated duct                                           | ALP                    |
|    |                                                              | Nutech                 |
|    |                                                              | Radient air systems    |
| 16 | Pre-insulated Pipe                                           | Perma pipe             |
|    |                                                              | Seven Star             |
| 17 | Passivation system for hydraulic systems (CHW/CDW/Hot water) | Western Air Duct       |
|    |                                                              | Biocide                |

|      |                                                                     |                        |
|------|---------------------------------------------------------------------|------------------------|
|      |                                                                     | Chemtex                |
| 18   | Grille/diffuser/dampers                                             | Airflow                |
|      |                                                                     | Air Master             |
|      |                                                                     | Caryaire               |
|      |                                                                     | Cosmic                 |
|      |                                                                     | Cosmos                 |
|      |                                                                     | Dynacraft              |
|      |                                                                     | Ravistar               |
| 19   | Smoke / Fire Damper (Actuator shall be UL listed)                   | Greenheck              |
|      |                                                                     | Ruskin                 |
|      |                                                                     | Airmaster              |
|      |                                                                     | Caryaire               |
|      |                                                                     | Cosmic                 |
|      |                                                                     | George Rao             |
|      |                                                                     | Ravistar(Systemair)    |
| 20   | Sound Attenuator                                                    | Greenheck              |
|      |                                                                     | Systemair              |
|      |                                                                     | Trox                   |
|      |                                                                     | Caryaire               |
|      |                                                                     | George Rao             |
|      |                                                                     | Ravistar (Systemair)   |
|      |                                                                     | Unifair                |
| 21   | Anchor Fastener                                                     | Fischer                |
|      |                                                                     | Hilti                  |
|      |                                                                     | Power Fastener         |
| 22   | Insulation                                                          |                        |
|      |                                                                     |                        |
| 22.1 | Closed Cell Elastomeric nitrile rubber/EPDM along with adhesive     | Eurobatex – Union Foam |
|      |                                                                     | Aeroflex               |
|      |                                                                     | A flex                 |
|      |                                                                     | Armacell               |
| 22.2 | Microban Closed Cell Elastomeric nitrile rubber along with adhesive | A flex                 |
|      |                                                                     | Armacell               |
|      |                                                                     |                        |
|      |                                                                     |                        |
| 22.3 | Cross link polyethylene foam with adhesive                          | Trocellen              |
|      |                                                                     |                        |
| 22.4 | Fibreglass (Al. Foil Faced)                                         | Kimmco                 |
|      |                                                                     | Owens Corning          |
|      |                                                                     | Lloyd insulation       |
|      |                                                                     | UP Twiga               |

|    |                                               |                               |
|----|-----------------------------------------------|-------------------------------|
| 23 | Acoustic insulation                           |                               |
|    | a. Fibre glass                                | Kimmco                        |
|    |                                               | Owens Corning                 |
|    | b. Nitrile rubber with Antimicrobial property | Armacell - Armasound          |
|    |                                               | Lloyd insulation              |
|    |                                               | UP Twiga                      |
|    |                                               | A Flex                        |
| 24 | Expanded Polystyrene (TF Quality)             | Armacell - Armasound          |
|    |                                               | Beardsell                     |
|    |                                               | Coolite                       |
|    |                                               | Styrene Packaging             |
| 25 | Humidistat                                    | Tosiba                        |
|    |                                               | Honeywell                     |
|    |                                               | Invensys                      |
|    |                                               | Johnson Control               |
|    |                                               | Sauter                        |
| 26 | Vibration Isolator                            | Siemens                       |
|    |                                               | Cori                          |
|    |                                               | Flexionics                    |
|    |                                               | Kanwal Industrial Corporation |
| 27 | Flexible Pipe Connection                      | Resistoflex                   |
|    |                                               | Mason                         |
| 28 | Plug fans                                     | Weico                         |
|    |                                               | Kruger                        |
|    |                                               | Greenheck                     |
| 29 | HDPE Tanks                                    | Wolter                        |
|    |                                               | Sintax                        |
|    |                                               | Local approval                |

**TECHNICAL SPECIFICATION**

**COMPRESSOR WORKS**

## **COMPRESSOR WORKS**

### **6.1 SCOPE OF SUPPLY**

#### **6.1.1 INTRODUCTION**

This section covers the requirements for compressed air generation facilities to be supplied at technical centre at Mumbai. This system package shall be modularised / pre-assembled as much as possible, aiming for the shortest construction period.

#### **6.1.2 EQUIPMENT AND SERVICES TO BE PROVIDED BY CONTRACTOR**

The equipment to be supplied and erected under this specification are shown in the flow diagram enclosed with this specification, as detailed in section Schedule of quantities and these shall be in accordance relevant Data sheet A of this section. Any item which may not have been specifically mentioned herein but are needed to complete the equipment / system shall also be treated as included and the same shall also be furnished and erected, unless otherwise specifically excluded as indicated.

#### **6.1.3 ENGINEERING / DESIGN**

- a) Supply of engineering information for interface points with other piping.
- b) Operation philosophy and control logic for instrumentation and controls.
- c) General arrangement and equipment layout drawings of compressors, receiver and air drying plant in compressor room.
- d) P&ID of compressor system.

#### **6.1.4 SUPPLY ALL MATERIALS TO SITE INCLUDING, BUT NOT LIMITED TO**

- a) Two nos (2W + 0S) motor driven, lubricated air cooled screw compressor inbuilt with refrigerant type dryer, capable of delivering 35CFM (FAD) each at a discharge pressure of 8.5 Kg/cm<sup>2</sup> (g) with associated accessories as per enclosed datasheets.

- b) One set of filters consisting of pre-filter and fine filter to restrict oil carry over to 1 mg/m<sup>3</sup>. Differential pressure gauge with root isolation valve shall be provided at appropriate locations.
- c) One no. Vertical air receiver as per enclosed datasheet with all accessories having capacity of 1 M<sup>3</sup>. Receiver shall be provided with two (2) suitably sized safety valves to relieve the full compressor discharge capacity and shall be set at a pressure 1.25 times the operating pressure. Receivers shall be provided with one no. pressure indicator and auto drain trap assembly.
- d) All instruments for the compressor as indicated (but not limited to) in attached flow diagram & data sheets required for proper operation & monitoring of the compressor along with all instrument impulse piping, fittings and erection hardware.
- e) Completely wired microprocessor based panel along with operator interface unit with LCD screen with push buttons for compressor operation and all necessary accessories shall be supplied fully wired for each compressor for load-un-load / start-stop & other controls for the compressor along with complete earthing.
- f) All instruments for the air dryer required for proper operation & monitoring of the air dryer along with all instrument impulse piping, fittings and erection hardware.
- g) Completely wired skid mounted microprocessor based panel for the air dryer for operation and monitoring along with complete earthing.
- h) Control and instrumentation cables for connection between instrument / equipment/ MCC and the control panels for the compressor & air dryer along with all cable trays, conduits, glands, termination accessories etc..
- i) One lot of base plates, foundation bolts, nuts and washers etc. required for each equipment
- j) Counter flanges with bolts, nuts, washers and gaskets for all equipment at all terminal points of equipment covered under Contractor's scope of supply.
- k) First fill of all lubricants and consumables
- l) One set of commissioning and start – up spares. (Price for the same shall be included in the total quoted price only).

- m) One set of recommended spares for 2 years of trouble free operation. (Contractor shall list the recommended spares and furnish the unit rates separately)
- n) One set of recommended maintenance tools and tackles. (Contractor shall list the same and furnish the unit rates separately)
- o) Painting
- p) Installation, operation and maintenance manual for the complete system

#### **6.1.5 OTHER SERVICES BY CONTRACTOR**

- a) Necessary in-house Inspection
- b) Supervision of Erection
- c) Erection, Testing, Commissioning and Start-up at site
- d) Performance Testing of Equipment
- e) Training of Purchaser's personnel
- f) Documentation.

#### **6.1.6 EQUIPMENT & SERVICES TO BE PROVIDED BY CONTRACTOR.**

The following are the equipment and services that shall be provided contractor:

- a) Supply & laying of power cable up to the vendor panel shall be done by electrical works contractor.
- b) Earthing pits and the earthing cables from the compressor control skid /dryer control panel to the earthing pits.
- c) All inter-connecting piping with valves, fitting & specialities, as indicated In flow diagram.
- d) Civil construction, buildings, equipment foundations by civil contractor.
- e) Electrical trenches and drain by civil contractor.



## **6.2 CODES AND STANDARDS**

All equipment, systems and works covered under this specification shall comply with all currently applicable statutes, regulations, standards and safety codes in the locality where the equipment will be installed. All equipment and systems shall comply in all respects with requirements of latest editions of codes and standards as indicated in this specification.

In the event of any conflict between the codes and standards referred to in the specification and the requirements of this specification, the more stringent of this requirement shall govern.

- a) ASME SEC. VIII DIV.1-2015 - Boiler and Pressure Vessel Code
- b) IS 5456:2006 Code of Practice for Testing of Positive Displacement Type Air Compressors and Exhausters
- c) IS 6206:2012 Guide for Selection, Installation and Maintenance of Air Compressor Plants with Operating Pressures up to 10 bar (g)
- d) IS 7938:1976 Air Receivers for Compressed Air Installation
- e) IS 11780:1986 Code for Selection and Testing of Rotary Screw Air Compressors (Oil Flooded)
- f) ISO 8573:1: 2001 Compressed Air Contaminants and purity classes

## **6.3 SPECIFIC REQUIREMENTS / INSTRUCTION TO CONTRACTOR**

- 6.3.1 All equipment supplied shall have capacities not less than those specified in the in the specification and necessary test certificates shall be furnished in this regard. However, if the CONTRACTOR feels that higher capacity equipment is required meet guarantee requirements, he should offer the same and substantiate the same by calculations.
- 6.3.2 Any conflict between the requirements of this section and related specification, codes, standards and other documents, shall be referred to Consultant's for clarification.
- 6.3.3 Fabrication of package unit equipment shall be executed in a controlled manner. This means that all executed checks, tests and inspections are documented in the manufacturing report
- 6.3.4 Equipment design shall be aimed at maximum standardization of components and subassemblies to ensure lowest possible inventory of replacement of parts.
- 6.3.5 The equipment within the package unit shall be easily accessible for operation and maintenance.
- 6.3.6 The motor rating indicated in the bid shall be final and the CONTRACTOR is not permitted to change this after the award of contract.

- 6.3.7 If required, vibration isolators, mounting / installation structural frames for all equipment shall be part of the CONTRACTOR's scope of work.
- 6.3.8 The CONTRACTOR shall quote unit rates for each type of equipment viz. Compressors, dryers and receivers etc. so that if Purchaser desires to add or delete the same from CONTRACTOR's scope of work, then the total price shall be adjusted based on the unit rates furnished by the CONTRACTOR.
- 6.3.9 Two compressors (2W+0S) of 35 CFM(FAD) capacity each are in operation at present.
- 6.3.10 The scope of work shall also include guarantee for trouble free operation of the complete system and equipment/accessories therein for a period of 18 months from the date of supply at site OR 12 months from date of successful commissioning of the system, whichever is earlier.
- 6.3.11 This guarantee shall also include overall performance guarantee of the entire` system to achieve design conditions stated in specification along with all necessary safety and statutory requirements.
- 6.3.12 During the guarantee period the CONTRACTOR shall rectify free of cost of all defects which may develop due to faulty design, material, construction and workmanship inclusive of free replacement of defective parts.
- 6.3.13 During the guarantee period the parts of the equipment requiring repairs or replacement shall be fitted at site by the CONTRACTOR such that the functioning of the system is not compromised for any reason whatsoever.
- 6.3.14 All expenses involved in fulfilling the above guarantee obligations like replacement of spares, consumables, deputation of service experts, their travel/lodging/boarding shall be borne by the CONTRACTOR.
- 6.3.15 Damages occurred to ceiling/floors/walls or any other parts of the building construction/maintenance shall be made good free of cost with approved fire rated materials failing which, the cost shall be debited to the CONTRACTOR.

#### **6.4 SPECIFIC ELECTRICAL REQUIREMENT**

- 6.4.1 Electric supply for motors covered under this package shall be made at 415 V, 3 phase by PURCHASER.
- 6.4.2 CONTRACTOR shall carryout all interconnecting control cabling inside the compressed air system panel. Necessary cable conduits / trays shall be provided by CONTRACTOR.
- 6.4.3 Control cables shall be stranded copper conductor PVC insulated and extruded PVC inner sheathed, galvanised steel stripwire armoured overall extruded PVC outer sheathed conforming to latest IS.
- 6.4.4 Purchaser will provide only power supply (415 V, 3 Ph) at one point. Further distribution to each panel / motor shall be by CONTRACTOR. Any further stepping down of supply shall be done by CONTRACTOR inside the control panel.
- 6.4.5 CONTRACTOR to include supply and installation of Star-Delta feeder for the compressor in the compressor panel.
- 6.4.6 The Star-Delta feeder shall include the starter, over-load relay, CTs ammeter and all necessary auxiliary relays, controls and on/off/trip indications on the panel.
- 6.4.7 Earthing for all equipment shall be by PURCHASER.

## **6.5 SPECIFIC REQUIREMENT OF I & C SYSTEM**

6.5.1 This specification shall be read in conjunction with the data sheets, enclosed as part of of this Section.

### **6.5.2 I&C SYSTEM FOR COMPRESSOR**

6.5.2.1 The Air Compressor Package Unit shall be supplied complete with all instruments and control equipment/systems, both field and panel mounted. It shall include but not be limited to the following :

- (a) Pressure indicators as per data sheet for :
  - i. Discharge of each compressor
  - ii. Each air receiver pressure
  - iii. Lube oil pressure
- (b) Pressure Switches as per data sheet for Lube oil pressure low.
- (c) Pressure transmitter as per data sheet for Pressure transmitter on each air receiver for:
  - i. Air receiver pressure high & low alarms
  - ii. Loading/unloading of each air compressor
  - iii. Auto start/stop action of each compressor
- (d) Thermometers as per data sheet or :
  - i. Air temperature for inter stage of each compressor (where multistage compressors are required).
  - ii. Air temperature at the discharge of each compressor.
  - iii. Air temperature in outlet of the dryer
- (e) Temperature Switches as per data sheet No. for :
  - i. Air temperature at discharge of each compressor high
  - ii. Air temperature after cooler high
  - iii. Lube oil temperature high
- (f) Safety Relief valves as per data sheet for air receiver pressure very high.

#### **6.5.2.2 Control Panel**

Microprocessor based control panel shall be provided for compressor. It shall be provided with operator interface unit (OIU) with 4 line LCD display. It shall display

all the process parameters and alarms on the screen. Alarms shall be provided with audible and visual indication. Push button shall be provided for start/stop operation of the dryer. All logic and interlocks for sequential operations shall be programmed in the controller unit.

The panel shall be prefabricated type with enclosure protection of IP 52 as per IS 13947. The panel shall be made of CRCA cold rolled sheet of 2mm thickness. The panel shall be painted with exterior colour 631 of IS-5 & interior paint shall be glossy white. 3 pin receptacle for 230 V AC, 1P, 50 Hz shall be provided inside the panel. All internal wiring shall be carried out with 1100V grade, stranded tinned copper conductors with PVC insulation. The panel shall be provided with a proper earthing bus made of copper securely fixed along the inside base of the panels. This bus shall be typically of 25 mm wide and 6 mm thick of copper.

- (a) Each compressor unit shall be provided with necessary controllers for the safe & reliable operation of the compressor.
- (b) A two position selector switch shall be provided on the control panel for selection of the compressor Master/Follower
- (c) Each compressor panel shall be provided with a three position selector switch marked Auto-Off-On for the following functions :
  - i. Auto - The compressor shall be selected as 'Working' in load / unload mode.  
The "follower compressor will be started in load/unload mode if the compressed air demand increases beyond the capacity of the 'Working' compressor.
  - ii. Off Stops the respective motor.
  - iii. On For manual start of the respective compressor by push buttons with load / unload regulation.

- (d) Pushbuttons shall be provided on the front facia of the control panel for manual start/stop operation of the compressor. An emergency stop pushbuttons shall also be provided.
- (e) One potential free contact will be made available at the terminals of the each compressor control panel for remote alarm under trip condition.
- (f) The control system shall permit operation of each compressor in either of the following two regulations:
  - i. Continuous Run-Load-Unload Regulation.
  - ii. Automatic Start-Stop Regulation.
- (g) Under continuous Run-Load-Unload Regulation, the drive motor shall run continuously while the compressor shall be loaded at pre-set (adjustable) cut-in pressure as the receiver pressure falls and unloaded at a higher pre-set (adjustable) cut-out pressure, as the receiver pressure rises. With automatic Start-Stop Regulation, the drive motor shall automatically start at pre-set (adjustable) cut-in pressure as the receiver pressure falls and automatically stop at a pre-set (adjustable) higher cut-out pressure as the receiver pressure rises.
- (h) With either system, the compressor shall always be unloaded when the drive motor starts. The unloaders shall keep the compressor unloaded till the drive motor comes to full speed.
- (i) Following are the minimum alarm annunciation required to be provided on the operator interface unit screen. In addition to the alarms mentioned below vendor shall provide the necessary alarms for safe operation of compressors:
  - i. Tripping of individual air compressors
  - ii. Each air receiver pressure high
  - iii. Each air receiver pressure low
  - iv. Lube oil pressure low
  - v. Air temperature at discharge of inter stage of each compressor high
  - vi. Air temperature at discharge of each compressor high
  - vii. Air temperature after each after cooler high

viii. Lube oil temperature high

- (j) 1 no. of hooter shall be provided on the panel for the sound identification of the Alarm condition. Facility for the Test / Acknowledge / Reset for Alarms shall be provided on the PLC panel.
- (k) All inter cubical and internal wiring for the panel shall be carried out with 1100V grade, stranded tinned copper conductors with PVC insulation.

6.5.2.3 The panel shall be provided with a proper earthing bus made of copper securely fixed along the inside base of the panels. These buses shall be typically of 25 mm wide and 6 mm thick of copper.

#### 6.5.2.4 Operator Interface Unit

Unless otherwise specified all set points, control parameters, alarm limits and timers shall be adjustable through the Operator Interface Unit (OIU) with suitable password protection.

- (a) It shall also provide following facilities:
  - i. Selection of particular control sequences and actions
  - ii. Display and acknowledgement of alarms with an alarm log giving individual status.
  - iii. Provide data storage
  - iv. Provide data downloading facility
- (b) Alarms shall be raised on the OIU as described above.

#### 6.5.2.5 INSTRUMENT POWER SUPPLY

The power supply made available for instrumentation system for both compressor shall be 230V AC. Converters or power supply units required to derive the necessary operating voltages other than 230V AC for the instrumentation system shall be in the scope of contractor. MCBs shall be provided in the panel for each power supply distribution feeder to field & panel mounted instruments and PLC.

#### 6.5.2.6 CABLES

Cabling from control panels to electrical panel and cabling between instruments & panels supplied by the Contractor shall be by Contractor. Necessary cable trays, conduits shall be provided by contractor. The specifications for the cables shall be as per data sheet.

#### 6.5.2.7 INSTALLATION & COMMISSIONING

CONTRACTOR's scope of work includes, erection of instruments and control panel, instrument cabling, loop checking and commissioning. All instruments shall be erected in such a manner that they are easily read and maintenance can be carried out easily without shutting down the plant. Prior to guarantee run of the plant, all the instruments shall be recalibrated and the results shall be recorded. Erection of instruments shall be carried out as per the CONTRACTOR's instrument installation drawings after getting Consultant's / Purchaser's approval.

#### 6.5.2.8 TESTING & INSPECTION

All the instruments & panels shall be tested and calibrated at manufacturer's works in an approved manner. Inspection shall be carried out in the presence of Purchaser's inspector. All test certificates for testing instruments shall have calibration certificates from approved test house, valid for minimum 6 months.

### **6.6 GUARANTEES AND PERFORMANCE REQUIREMENT**

#### 6.6.1 GENERAL

The compressed air system shall perform satisfactorily to meet the guarantee requirements specified to the entire satisfaction of the PURCHASER / ENGINEER.

#### 6.6.2 COMPRESSED AIR SYSTEM

- i. The CONTRACTOR shall guarantee the capacities of various equipment as specified in this section and schedule of quantities.
- ii. Allowable tolerances on capacity (FAD) of compressors: (-) Zero  
(+) Anything
- iii. Allowable tolerances on discharge pressure at compressor outlet: (+) 0.5 bar  
(-) Zero
- iv. Allowable tolerances on dew point temperature at atmospheric pressure of compressed air at battery limit shall be: (-) Anything, (+) Zero
- v. Allowable noise level measured at a distance of 1.5 metres from the source in any direction: (+) Zero, (-) Anything

- vi. The above allowable tolerance requirements are excluding instrument tolerances.

#### 6.6.3 POWER CONSUMPTION

- Tolerance on Power consumption: (+) Zero  
(-) Anything

### 6.7 **ACCEPTANCE TEST**

- 6.7.1 After the entire installation work has been completed, the CONTRACTOR shall make all required adjustments until all guaranteed performance requirements are met. All instruments, services required for the above tests shall be furnished by the CONTRACTOR. The test reports shall be handed over for PURCHASER's approval before handing over the plant.
- 6.7.2 If the stipulated performance requirements are not fulfilled, the CONTRACTOR shall make good the deficiency by providing it in every case, by altering and/ or replacing the parts or the whole equipment / system free of charge to the PURCHASER immediately. All rejected equipment shall be removed from the site at CONTRACTOR's expense.

### 6.8 **PAINTING**

All the non-insulated exposed carbon steel surfaces of equipment and piping shall be painted as indicated below:

- 6.8.1 Surface preparation – Removal of dust, dirt, oil, grease, scale and other foreign material by manual or power tools.
- 6.8.2 Primer – 2 coat of red oxide primer (conforming to IS: 2074) with minimum dry film thickness (DFT) 25 microns per coat.
- 6.8.3 Finish – 2 coat of synthetic enamel (conforming to IS: 2932) with minimum dry film thickness (DFT) 25 microns per coat.

### 6.9 **TENDER EVALUATION AND PENALTY FACTOR**

#### 6.9.1 Tender Evaluation

- a) The CONTRACTOR shall comply with all systems / parameters wherever they are specified in specification and in data sheets A . Evaluation factor as indicated in para below for power consumption shall apply. The evaluation factor shall be applicable to the differential power consumption of all installed equipment, calculated with the lowest quoted parameter as the base. The CONTRACTOR shall indicate under



section schedule of quantities the guaranteed power consumption for each equipment separately.

- b) Deviation from the specifications, if acceptable to the PURCHASER insofar as practicable will be converted to rupee value and added to the bid price to compensate for the deviation from the specification. In determining the rupee value of the deviations, the PURCHASER will use the parameters consistent with those specific in the documents and specifications and other information as necessary and available to the PURCHASER.

#### **6.10 MAINTENANCE REQUIREMENTS**

- 6.10.1 In order to carry out preventive maintenance, it should be possible to readily disassemble, repair, re-assemble the equipment in the shortest period and to attend to any defect by a minimum disassembly.
- 6.10.2 The CONTRACTOR shall furnish one complete set of any special maintenance tools required for normal maintenance of equipment. The prices for the same shall be indicated in– Schedule of prices and delivery.
- 6.10.3 The CONTRACTOR shall confirm that space shown for the equipment is adequate from point of view of access, easy maintenance and for day to day operation.
- 6.10.4 All system must have convenient maintenance characteristics including :
- a) Minimum disturbance to production during preventive maintenance.
  - b) Easy access to replacement part which can be installed by personnel with minimum skill.

#### **6.11 SUMMARY OF DATA TO BE FURNISHED ALONG WITH BID AND AFTER ACCEPTANCE OF PURCHASE ORDER**

The CONTRACTOR shall ensure the following documentation are prepared and submitted to PURCHASER for his review / record.

##### **6.11.1 ALONG WITH BID**

| <u>Sl. No.</u> | <u>Details</u>                                                                     |
|----------------|------------------------------------------------------------------------------------|
| 1.0            | Description of the systems offered along with catalogues, leaflets, drawings, etc. |

| <u>Sl. No.</u> | <u>Details</u>                                                                                                                                                          |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2.0            | All data sheet B of the tender specification, duly filled in.                                                                                                           |
| 3.0            | Confirmation on layout drawing enclosed for locations of equipment & provision of space for operation & maintenance.                                                    |
| 4.0            | Performance curves / rating charts used for selection of equipment for all the systems shall be furnished along with the bid, with the duty points duly marked on them. |
| 5.0            | Bar chart schedule indicating the date of completion of various activities so as to complete the contract within the time frame stipulated in the tender specification. |
| 6.0            | All section Schedule of quantities duly filled in.                                                                                                                      |
| 7.0            | Electrical load list indicating rating and quantity.                                                                                                                    |

#### 6.11.2 After Award of Contract

| <u>Sl. No.</u> | <u>Details</u>                                                                                                                                      |
|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| 1.0            | Instrument list with tag numbers, Makes and Model nos., Service, Type of instrument                                                                 |
| 2.0            | Data sheets & catalogues for instruments & cables.                                                                                                  |
| 3.0            | Following drawings for Control Panels for both compressor & air dryer:                                                                              |
|                | i. Drawings and data sheets for all equipment as listed in various data sheet enclosed with specification.                                          |
|                | ii. Front facia layout of showing all instruments with cut-outs, bezel dimensions, construction details, foundation details, interior G.A. drawings |

| <u>Sl. No.</u> | <u>Details</u>                                                                                                                |
|----------------|-------------------------------------------------------------------------------------------------------------------------------|
|                | iii. Internal wiring diagrams indicating termination details of each component                                                |
|                | iv. Bill of Material (B.O.M) indicating tag No., quantity, service & model no. of each controller/PLC module/instrument/item. |
| 4.0            | Catalogues for PLC system and Operator Interface Units                                                                        |
| 5.0            | Writeup on the controls provided for the compressor & dryer                                                                   |
| 6.0            | List of annunciation                                                                                                          |
| 7.0            | QAP for all the items.                                                                                                        |
| 8.0            | 'As Built' drawings                                                                                                           |
| 9.0            | Instruction manual for installation and start-up.                                                                             |

### 6.11.3 FINAL DOCUMENTS

6.11.3.1 CONTRACTOR shall submit the copies of operation and maintenance manuals well before the despatch of the equipment. The manual shall be in sufficient detail with step by step instructions to enable others to inspect erect, commission, maintain, dismantle, repair, reassemble and adjust all parts of the equipment. Each manual shall also include a complete set of approved as built drawings together with performance / rating curves / charts of the equipment, maintenance schedule and test certificates wherever applicable.

6.11.3.2 Quality assurance documentation specific for the project.

6.11.3.3 PIPING MATERIAL SPECIFICATION

|       |                                                 |
|-------|-------------------------------------------------|
|       | <b>BUTT WELDING</b>                             |
| SW    | SOCKET WELDING                                  |
| CS    | CARBON STEEL                                    |
| SS    | STAINLESS STEEL                                 |
| CI    | CAST IRON                                       |
| CL    | CLASS                                           |
| ERW   | ELECTRIC RESISTANT WELDED                       |
| EFW   | ELECTRIC FUSION WELDED                          |
| SMLS  | SEAMLESS                                        |
| PE    | PLAIN ENDS                                      |
| BE    | BEVELLED ENDS                                   |
| TE    | THREADED ENDS                                   |
| SO    | SLIP-ON                                         |
| WN    | WELDING NECK                                    |
| LJ    | LAP JOINT                                       |
| RF    | FLANGED RAISED FACE                             |
| FF    | FLANGED FLAT FACE                               |
| SCH   | <b>SCHEDULE</b>                                 |
| GALV  | GALVANISED                                      |
| IBR   | INDIAN BOILER REGULATION                        |
| EPDM  | ETHYLENE PROPYLENE DIENE MONOMER                |
| U-PVC | UNPLASTICISED POLYVINYLCHLORIDE                 |
| C-PVC | CHLORINATED POLYVINYLCHLORIDE                   |
| HDPE  | HIGH DENSITY POLYETHYLENE                       |
| NPT   | AMERICAN STD. PIPE THREAD (NATIONAL PIPE TAPER) |
| Gr    | GRADE                                           |
| TOE   | THREADED ONE END                                |
| TBE   | THREADED BOTH END                               |
| PSE   | PLAIN SMALL END                                 |
| BLE   | BEVELLED LARGE END                              |
| THK   | THICKNESS                                       |

**NOTES:**

1. SPECIFIC REQUIREMENTS GIVEN IN PIPING DRAWINGS OR IN ISOMETRICS SUPERSEDES REQUIREMENTS GIVEN HERE.
2. USE PTFE TAPE FOR THREADED JOINTS FOR TEMPERATURE  $\leq 200^{\circ}\text{C}$

| SERVICE :: COMPRESSED AIR |                                             |                                                       |                             |           |                                        |                                 |           |                             |                                 |                                          |           |        |
|---------------------------|---------------------------------------------|-------------------------------------------------------|-----------------------------|-----------|----------------------------------------|---------------------------------|-----------|-----------------------------|---------------------------------|------------------------------------------|-----------|--------|
| DESIGN                    | TEMP. <del>° F</del> / ° C                  |                                                       | 60                          |           |                                        | CORR. ALL. <del>inch</del> / mm |           |                             | 1.5                             |                                          |           |        |
|                           | PR. <del>psig</del> / kg/ cm <sup>2</sup> g |                                                       | 10                          |           |                                        | FLANGE FACING                   |           |                             | RF, CONC. SERR. FINISH (NOTE-5) |                                          |           |        |
| NOM. PIPE SIZE            |                                             | mm                                                    | 15                          | 20        | 25                                     | 32                              | 40        | 50                          | 65                              | 80                                       | 100       | 150    |
| OUTSIDE DIA.              |                                             | mm                                                    | 21.8                        | 27.3      | 34.2                                   | 42.9                            | 48.8      | 60.8                        | 76.6                            | 89.5                                     | 115       | 166.5  |
| CLASS/<br>THICKNESS       |                                             | mm                                                    | HV<br>Y<br>CL               | HVY<br>CL | HVY<br>CL                              | HVY<br>CL                       | HVY<br>CL | HVY<br>CL                   | HVY<br>CL                       | HVY<br>CL                                | HVY<br>CL | HVY CL |
| LINE JOINT                |                                             | ≤ 40                                                  | < 40 - SW TO ANSI B16.11    |           |                                        |                                 |           |                             |                                 |                                          |           |        |
|                           |                                             | ≥ 50                                                  | > 50 - BW TO ANSI B16.25    |           |                                        |                                 |           |                             |                                 |                                          |           |        |
| MAINTENANCE JOINTS        |                                             | ALL                                                   | FLANGED. TO BE KEPT MINIMUM |           |                                        |                                 |           |                             |                                 |                                          |           |        |
| ITEM                      |                                             | NOMINAL<br>PIPE<br>SIZE RANGE<br><del>inch</del> / mm |                             |           | MATERIAL<br>SPECIFICATION              |                                 |           | DIMENSION<br>AL<br>STANDARD |                                 | REMARKS                                  |           |        |
| PIPES                     |                                             | ≤ 150                                                 |                             |           | CS, IS 1239 PT-1<br>(GALVANISED)       |                                 |           | IS 1239 PT-1                |                                 | ERW, GALVANISED, ≤ 40 –<br>PE, ≥ 50 - BE |           |        |
|                           |                                             | > 150                                                 |                             |           | CS, IS 3589 Gr. FE 410<br>(GALVANISED) |                                 |           | IS 3589                     |                                 | ERW, GALVANISED                          |           |        |

|                      |                                   |             |                                     |                     |                                                   |
|----------------------|-----------------------------------|-------------|-------------------------------------|---------------------|---------------------------------------------------|
| PIPE NIPPLE          |                                   | 15 TO 40    | CS, IS 1239 PT-1<br>(GALVANISED)    | IS 1239 PT-1        | TYPE-E, POE-TOE,PBE,TBE,SCH TO MATCH PIPE         |
| B.W. FITTINGS        | ELBOWS,<br>CAPS,<br>REDUCERS,TEES | > 40 TO 150 | ASTM A 234 Gr. WPB<br>(GALVANISED)  | ANSI B 16.9         | SCH 40, SMLS                                      |
|                      | ELBOWS,<br>CAPS,<br>REDUCERS,TEES | > 150       | ASTM A 234 Gr. WPBW<br>(GALVANISED) | ANSI B 16.9         | SCH MATCH TO PIPE THICKNESS, WELDED (SEE NOTE -1) |
| S.W . FITTINGS       |                                   | ≤ 40        | ASTM A 105<br>(GALVANISED)          | ANSI B 16.11        | 3000CL.                                           |
| SWAGES(<br>ECC/CONC) |                                   | 15 TO 100   | ASTM A 234 Gr. WPB<br>(GALVANISED)  | MSS SP 95           | PSE & BLE,THICKNESS TO MATCH PIPE                 |
| BRANCH CONNECTION    |                                   | ALL         |                                     |                     | SEE BRANCH CONNECTION CHART                       |
| FLANGES              |                                   | ≤ 150       | ASTM A 105<br>(GALVANISED)          | ANSI B 16.5         | SO, 150 CL                                        |
|                      |                                   | 200 TO 300  | IS 2062 Gr. A<br>(GALVANISED)       | ANSI B 16.5         | SO, 150 CL                                        |
|                      |                                   | ≥ 350       | IS 2062 Gr. A<br>(GALVANISED)       | ANSI B 16.5         | SO, 150 CL LIGHT WEIGHT (SEE NOTE-2)              |
| BLIND FLANGES        |                                   | ≤ 150       | ASTM A 105<br>(GALVANISED)          | ANSI B 16.5         | 150 CL                                            |
|                      |                                   | 200 TO 300  | IS 2062 Gr. A<br>(GALVANISED)       | ANSI B 16.5         | 150 CL                                            |
|                      |                                   | ≥ 350       | IS 2062 Gr. A<br>(GALVANISED)       | ANSI B 16.5         | 150 CL LIGHT WEIGHT (SEE NOTE-2)                  |
| MACHINE / STUD BOLTS |                                   | ALL         | ASTM A 307 GR.B<br>(GALVANISED)     | ANSI B 18.2.1       | CL. 2A                                            |
| HEAVY HEX. NUTS      |                                   | ALL         | ASTM A 194, Gr.2<br>(GALVANISED)    | ANSI B 18.2.2       | CL.2B REF NOTE 2                                  |
| GASKETS              |                                   | ALL         | NOTE-4                              | ANSI B 16.21 CL.150 | SELF-CENTERING RING, 2 MM THK. (NOTE-5)           |

|                                                                                                                                                                                                                           |                         |                         |                                              |                     |                    |                                      |                                                                                    |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-------------------------|----------------------------------------------|---------------------|--------------------|--------------------------------------|------------------------------------------------------------------------------------|
| UNIONS                                                                                                                                                                                                                    |                         | ≤ 40                    | ASTM A 105<br>(GALVANISED)                   |                     | ANSI B 16.11       | SW 3000 CL                           |                                                                                    |
| THREADED<br>FITTINGS                                                                                                                                                                                                      |                         | ≤ 40                    | ASTM A 105<br>(GALVANISED)                   |                     | ANSI B 16.11       | 3000 CL                              |                                                                                    |
|                                                                                                                                                                                                                           |                         |                         |                                              |                     |                    | NPT / IS 554 ( TAPER) AS<br>REQUIRED |                                                                                    |
| TYPE<br>OF<br>VALVE                                                                                                                                                                                                       | SIZE<br>RANG<br>E       | MATERIAL                |                                              | PRESSUR<br>E RATING | TYPE<br>OF<br>ENDS | SPECIFICATI<br>ON OR                 | REMARKS                                                                            |
|                                                                                                                                                                                                                           | <del>inch.</del><br>mm. | BODY                    | TRIM                                         | ANSI/ IS            |                    | -                                    |                                                                                    |
| CHECK<br>(LIFT<br>TYPE)<br>GATE<br>GLOBE                                                                                                                                                                                  | ≤ 40                    | ASTM A<br>105           | 13% Cr.<br>STEEL                             | 800                 | SW                 | -                                    |                                                                                    |
| BALL                                                                                                                                                                                                                      | 15 TO<br>40             | ASTM A<br>105           | SS 304                                       | 150                 | TE                 | -                                    | SCREWED, TWO<br>PIECE, REGULAR<br>PORT TYPE WITH<br>PTFE SEAT, SCREWED             |
| BALL                                                                                                                                                                                                                      | ≥ 50                    | ASTM A<br>216<br>Gr.WCB | SS 304                                       | 150                 | RF                 | -                                    | FLANGE END, TWO<br>PIECE, REGULAR<br>PORT TYPE WITH<br>PTFE SEAT ,<br>FLANGED ENDS |
| CHECK<br>(DUAL<br>PLATE<br>)                                                                                                                                                                                              | ≥ 50                    | SG IRON                 | DISC: ASTM<br>A 216 GR.<br>WCB,<br>SEAT:EPDM | 150                 | WAFER              | -                                    |                                                                                    |
| <b>NOTES:</b>                                                                                                                                                                                                             |                         |                         |                                              |                     |                    |                                      |                                                                                    |
| 1. USE FLAT END COVERS INSTEAD OF CAPS FOR SIZE ≥ 200                                                                                                                                                                     |                         |                         |                                              |                     |                    |                                      |                                                                                    |
| 2. NUT SHALL BE ALONG WITH WASHER.                                                                                                                                                                                        |                         |                         |                                              |                     |                    |                                      |                                                                                    |
| 3. GASKETS SHALL BE OF ASBESTOS FREE NBR DULY REINFORCED WITH ARMID FIBRES                                                                                                                                                |                         |                         |                                              |                     |                    |                                      |                                                                                    |
| 4. USE FLAT FACE FLANGES & FULL FACE GASKETS WITH CAST IRON FLANGED VALVES.                                                                                                                                               |                         |                         |                                              |                     |                    |                                      |                                                                                    |
| 5. PRIOR TO WELDING OF GALVANISED PIPING, GALVANISING SHALL BE LOCALLY REMOVED FOR A<br>LENGTH OF 50 mm FROM<br>EACH END. EXTERNAL SURFACE SHALL BE COATED WITH ZINC-RICH PAINT AFTER COMPLETION OF<br>WELDING OPERATION. |                         |                         |                                              |                     |                    |                                      |                                                                                    |

### **BRANCH CONNECTION CHART**

|                      |        |    |    |    |    |    |    |    |     |     |  |  |  |  |  |  |
|----------------------|--------|----|----|----|----|----|----|----|-----|-----|--|--|--|--|--|--|
| SIZE                 | BRANCH |    |    |    |    |    |    |    |     |     |  |  |  |  |  |  |
| <del>inch</del> / mm |        |    |    |    |    |    |    |    |     |     |  |  |  |  |  |  |
| RUN                  | 15     | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 150 |  |  |  |  |  |  |

|     |    |    |    |    |   |   |   |   |   |   |  |  |  |  |  |  |
|-----|----|----|----|----|---|---|---|---|---|---|--|--|--|--|--|--|
| 15  | T  |    |    |    |   |   |   |   |   |   |  |  |  |  |  |  |
| 20  | RT | T  |    |    |   |   |   |   |   |   |  |  |  |  |  |  |
| 25  | RT | RT | T  |    |   |   |   |   |   |   |  |  |  |  |  |  |
| 32  | RT | RT | RT | T  |   |   |   |   |   |   |  |  |  |  |  |  |
| 40  | RT | RT | RT | RT | T |   |   |   |   |   |  |  |  |  |  |  |
| 50  | H  | H  | H  | H  | H | S |   |   |   |   |  |  |  |  |  |  |
| 65  | H  | H  | H  | H  | H | S | S |   |   |   |  |  |  |  |  |  |
| 80  | H  | H  | H  | H  | H | S | S | S |   |   |  |  |  |  |  |  |
| 100 | H  | H  | H  | H  | H | S | S | S | S |   |  |  |  |  |  |  |
| 150 | H  | H  | H  | H  | H | S | S | S | S | S |  |  |  |  |  |  |



**LEGEND :**

T - EQUAL TEE

H - HALF COUPLING

SL - SOCKOLET

S - STUB -IN

SR - STUB-IN WITH R-PAD

RT - REDUCING TEE

TL -THREADOLET

WL - WELDOLET

N - NIPOLET

## **6.12 SPECIFICATION FOR AIR COMPRESSORS**

### **6.12.1 SCOPE**

This specification covers the general design, materials, construction features, manufacture, shop inspection and testing at manufacturer's works, delivery at site, handling at site, erection, testing, commissioning, performance testing and handing over of Air / Gas Compressors and Accessories.

### **6.12.2 CODES AND STANDARDS**

The design, materials, construction, manufacture, inspection, testing and performance of the air/ gas compressors and accessories shall comply with all currently applicable statutes, regulations and safety codes in the locality where the equipment is to be installed. The equipment shall also conform to the latest applicable Indian or equivalent standards. Other international standards are also acceptable, if these are established to be equal or superior to the listed standards. Nothing in this specification shall be construed to relieve the CONTRACTOR of this responsibility.

The following are some of the important codes and standards relevant to this specification.

- a) API 617 Centrifugal Compressors for Petroleum, Chemical, and Gas Service Industry Services
- b) API 618 Reciprocating Compressors for Petroleum, Chemical, and Gas Industry Services
- c) API 619 Rotary Type Positive Displacement Compressors for Petroleum, Chemical, and Gas Industry Services
- d) API 672 Packaged, Integrally Geared Centrifugal Air Compressors for Petroleum, Chemical, and Gas Industry Services
- e) ASME SEC. Boiler and Pressure Vessel Code VIII DIV.1
- f) TEMA Standards of the Tubular Exchanger Manufacturers Association
- g) IS 2825 Code for Unfired Pressure Vessels

- h) IS 5456 Code of Practice for Testing of Positive Displacement Type Air Compressors and Exhausters
- i) IS 6206 Guide for Selection, Installation and Maintenance of Air Compressor Plants with Operating Pressures up to 10 bars
- j) IS 7938 Air Receivers for Compressed Air Installation IS 11780 Code for Selection and Testing of Rotary Screw Air Compressors (Oil Flooded)
- k) IS 13124 Reciprocating Gas Compressors - Technical Supply Conditions

#### 6.12.3 DESIGN AND CONSTRUCTION FEATURES

The compressor shall be of reciprocating or centrifugal or screw type as specified in data sheet A.

#### 6.12.4 RECIPROCATING COMPRESSORS

##### a) Frame

The frame shall be a single casting and robust in construction. It shall be provided with sufficiently large and easily removable inspection doors so that the bearings and other parts are readily accessible for checking and adjustments. Inspection doors shall be dust-proof and oil-tight.

##### b) Cylinder

The cylinder shall be made of cast iron or stainless steel or as specified in data sheet A. The cylinder heads and barrels shall be provided with cooling water jackets. The design of jackets shall be such that low air discharge temperature and minimum carbon formation are ensured. The water jackets shall be so constructed that the flow of water is uniform throughout the cooling surface and no stagnant water pockets are formed. The walls of the cylinder shall have sufficient thickness suitable for maximum working pressure and temperature and shall be suitable for reborring. It shall be provided with liberally sized valve openings and stream-lined passages. The internal surface of the cylinder shall be highly polished to reduce wear of the piston rings.

c) Piston and Piston Rod

The piston shall be of such a design and construction that the piston rings exert equal pressure at all points of the cylinder bore. The piston rod shall be designed to take up the full thrust acting on the piston. The piston rings for non-lubricated type compressor shall be of self-lubricating type. Piston speed shall be maximum 300 M/Min for large capacity compressors and 350 M/Min for small capacity compressors.

d) Cross Head

The cross head shall be of solid box type with the faces ground to work closely with the groove of the guides. The cross head pin shall be case hardened and ground.

e) Connecting Rod and Crank Shaft

The connecting rod shall be of I cross-section providing adequate strength and rigidity. The crank shaft shall be adequately designed so as to ensure smooth running, without vibrations. It shall be accurately finished to size and shall have sufficient length so as to be fitted to main bearing and flywheel.

f) Flywheel

The flywheel shall be designed such that it is well balanced and is of sufficient weight to give an even turning moment. The wheel shall be of robust construction. The spokes shall have oval cross-section and the boss shall have split construction such that the wheel runs true with the shaft. The flywheel shall be suitable for type of power transmission i.e. flat belt, V-belt, direct coupling etc. between the driver and compressor.

g) Main Bearings

The main bearings shall be of robust construction assuring long bearing life and shall have sufficiently large diameter and adequate length. The bearing at the crank pin end of connecting rod shall be fitted with bronze lined with best quality white metal. The bearing at the cross head end shall be fitted with a bushing made of bronze. The bearings shall be made in halves and shall have forced feed lubrication.

h) Valves

The valves shall have straight and uniform lift and maximum effective area so as to ensure low air velocity and minimum valve clearance. The valve plate discs shall be heat treated, tempered and ground and the valve seat shall be case hardened. The valve springs shall be capable of effecting quick opening and closing and shall also provide the required cushioning effect. The valve design shall be such that the valve can be easily removed for checking and maintenance.

i) Lubrication

(i) Frame Lubrication

Frame lubrication for small compressors with motor rating upto 55 kW shall be of splash type. The pressurised i.e. forced feed system shall be used for compressors with higher motor rating. In case of force feed lubrication, the oil pump shall be either driven by crank shaft of the compressor or shall be separately driven. The pump shall draw the oil from the adequately sized oil well

(ii) Cylinder Lubrication

For lubricated type of compressors, multi plunger pump or metering pump shall be used for cylinder lubrication. In case of non-lubricated type air compressors, a wiper ring shall be provided such that the crank case oil is not carried to the cylinder along with the piston rod.

#### 6.12.5 SCREW COMPRESSORS

a) Casing

Casing shall be of barrel type made of cast iron or fabricated steel for moderate pressure applications, cast steel or stainless steel for high pressure applications or as specified in data sheet A. For water injected applications the casing shall be of stainless steel or as specified in data sheet A. Casing shall have built-in air passages either as cast or machined.

b) Rotors

Rotors shall be of asymmetric profile. The material of construction of rotors shall be as specified in data sheet A. The rotors shall be dynamically balanced before and after mounting timing gears and thrust collars. The rotors shall be ultrasonically tested. For non-lubricated screw compressors rotors shall be lined with PTFE.

c) Gears

Gear pair shall be used to step up speed of the compressor. Helical gear hardened to minimum 55 RC shall be used. Gear shall be shrink fit on drive shaft and shall mesh with pinion mounted on extended portion of male rotor. Gears shall be designed as per AGMA standards.

d) Bearings

The rotors shall be carried in heavy duty ball and roller bearings to take radial and axial loads or journal bearings with thin babbitt metal lining.

e) Air- Oil Separator

In case of lubricated screw compressors, high efficiency air-oil separation system shall be provided to ensure removal of oil.

#### 6.12.6 ACCESSORIES

Accessories such as intake filter, silencer, inter-coolers, after -coolers, oil-coolers, receivers, control cabinet etc. shall be supplied to make the system complete in all respects.

#### 6.12.7 INTAKE FILTER

The intake filter shall be generally as per IS 6206. The type of intake filter shall be as specified in data sheet A. The filter shall be designed to retain particles of one (1) micron and above with ninety-seven (97) percent efficiency. In case of cloth filter, the filter element may be of nylon, polypropylene or woollen cloth attached to the wire netting .

#### 6.12.8 INTER-COOLERS

For multi stage compressors, inter-coolers shall be provided. These shall be of shell and tube type, with removable tube bundles. The tubes shall have sufficient thickness to withstand the operating pressure and shall be carefully expanded into the tube sheets. Capacity of inter-coolers shall be twenty (20) percent more than the compressor capacity or as specified in data sheet A. Design pressure shall be twenty-five (25) percent more than the working pressure or as specified in data sheet A. The material of construction and design shall be as specified in data sheet A.

#### 6.12.9 AFTER-COOLERS AND OIL-COOLERS

The construction features, design etc. shall be as per inter-coolers described above. Capacity of after-coolers and oil-coolers shall be twenty (20) percent more than the compressor capacity or as specified in data sheet A. Design pressure shall be twenty-five (25) percent more than the working pressure or as specified in data sheet A.

#### 6.12.10 RECEIVERS

Receivers shall generally conform to IS 7938. Receivers shall be provided with two (2) suitably sized safety valves to relieve the full compressor discharge capacity individually and shall be set at a pressure 1.25 times the operating pressure. The material of construction and design shall be as specified in data sheet A.

#### 6.12.11 MOTOR RATING

Motor shall be of suitable rating considering compressor power requirements. Motor rating shall be calculated as follows:

- (a) If compressor shaft input power requirement is 100 KW and above,

$$\text{Motor rating in KW shall be} = 1.10 \times \frac{\text{SKW}}{\eta_t}$$

- (b) If compressor shaft input power requirement is less than 100 KW,

$$\text{Motor rating in KW shall be} = 1.12 \times \frac{\text{SKW}}{\eta_t}$$

Where,

SKW = Shaft Power at selected speed in KW

$\eta_t$  = Efficiency of transmission

#### 6.12.12 CAPACITY CONTROL

Capacity control shall be achieved either by speed variation or at constant speed as specified in data sheet A. In case where capacity control is to be achieved at constant speed, following methods are generally available. Data sheet A shall be referred for method to be actually employed.

- (a) Automatic start-stop of the compressor
- (b) Automatic load-unload of the compressor
- (c) Throttling of suction valve
- (d) By-passing air or gas from delivery to suction inlet
- (e) Increasing clearance volume by a clearance pocket
- (f) Variable filling using a by-pass valve.
- (g) Movable inlet guide vanes.

#### 6.12.13 DUAL TYPE CONTROL

Capacity control by start-stop and load-unload of compressors is also known as 'dual type control', and same is described below.

The dual type control system shall permit operation of each compressor in either of the following two regulations :

- (a) Continuous Run-Load-Unload Regulation.
- (b) Automatic Start-Stop Regulation.



Under continuous Run-Load-Unload Regulation, the drive motor shall run continuously while the compressor shall be loaded at pre-set (adjustable) cut-in pressure as the receiver pressure falls and unloaded at a higher pre-set (adjustable) cut-out pressure, as the receiver pressure rises. With automatic Start-Stop Regulation, the drive motor shall automatically start at pre-set (adjustable) cut-in pressure as the receiver pressure falls and automatically stop at a pre-set (adjustable) higher cut-out pressure as the receiver pressure rises.

With either system, the compressor shall always be unloaded when the drive motor starts. The unloaders shall keep the compressor unloaded till the drive motor comes to full speed.

Each compressor shall be provided with one selector switch having three positions marked AUTO-OFF-ON for the following functions :

- (a) OFF -Stops the motor.
- (b) AUTO -Keeps the compressor(s) in load / unload mode as selected by master selector switch. Starts the motor of the compressor in start-stop regulation as selected by master selector switch.
- (c) ON-For manual start up by push buttons with load /unload regulation.

#### Two (2) Compressors Operation

A master selector switch common to both the compressors shall be provided having two positions marked 'AB' and 'BA'. When the master selector switch is in position 'AB' and the individual compressor control switches are in 'AUTO' position, compressor 'A' shall have continuous run-load-unload regulation and compressor 'B' shall have auto start-stop regulation. In the other position of the master selector switch 'BA', compressor 'B' shall have continuous run-load-unload regulation while compressor 'A' shall have start-stop regulation.

- a) Two pressure switches shall be provided to monitor receiver pressure for each compressor, one for load-unload control and the other for start-stop control considering two (2) steps regulation for load-unload mode. In case number of steps are more as

indicated in data sheet A, number of pressure switches provided shall be sufficient to meet the requirement.

- b) Pressure switches with alarm initiating contacts shall be provided for the receiver
- c) high and low pressures.
- d) The dual control units shall be complete with pressure switches, solenoid valves, control air tubing, air filter (if required) and other accessories as required for the afore-mentioned operations.
- e) For centrifugal compressors anti-surge control shall also be provided to protect compressor from surging.
- f) One potential free contact shall be made available for each compressor for remote alarm under trip condition and a common contact for compressor auto start.
- g) Green and red lamps shall be provided to indicate motor running and stop conditions respectively.
- h) Motors shall be provided with motor winding over-heat sensors and bearing temperature sensors for alarm indication and to trip the motor.
- i) For compressors driven with turbine, the required turbine control and instrumentation shall be provided.
- j) For air / gas compressors, depending on the hazardous area classification, motors and instrument enclosures shall be explosion-proof certified for the specific area.

#### 6.12.14 NOISE AND VIBRATIONS

- a) Noise level produced by any rotating equipment individually or collectively shall not exceed 85 dB(A) measured at a distance of 1.5 metres from the source in any direction.
- b) The overall vibration level shall be as per zones A and B of ISO 10816-1. Vibration dampening pads if required, shall be provided.

#### 6.12.15 PERFORMANCE GUARANTEES

Performance parameters to be guaranteed by the CONTRACTOR and tolerances permitted shall be as indicated in data sheet A. CONTRACTOR shall confirm acceptance of these by indicating values in data sheet B. Compressor or any portion thereof is liable for rejection, if it fails to give any of the guaranteed performance parameters.

**DATA SHEET A: AIR COMPRESSORS**

|                             |                                                                |                      |                                                                                                                      |
|-----------------------------|----------------------------------------------------------------|----------------------|----------------------------------------------------------------------------------------------------------------------|
| GENERAL                     | 1. DESIGNATION : COMPRESSORS FOR                               | DESIGN DATA (CONTD.) | 19.2 FOR INTER-COOLER, AFTER-COOLER                                                                                  |
|                             | COMPRESSED AIR SYSTEM                                          |                      | AIR                                                                                                                  |
|                             | 2. NUMBER REQUIRED : 2 (2W + 0S)                               |                      | 20. COOLING WATER QUALITY : NA                                                                                       |
|                             | 3. TAG NUMBERS :                                               |                      | 21. COOLING WATER INLET TEMPERATURE: NA                                                                              |
|                             | 4. LOCATION : INDOOR / <del>OUTDOOR</del>                      |                      | 22. MAXIMUM COOLING WATER OUTLET TEMPERATURE: NA                                                                     |
|                             | 5. OPERATION : CONTINUOUS / <del>INTERMITTENT</del> 12 Hrs/Day |                      | 23. COOLING WATER PRESSURE AT AT INLET: NA                                                                           |
|                             | 6. TYPE OF DRIVE : ELECTRIC MOTOR /                            |                      | 24. MAXIMUM ALLOWABLE COOLING WATER PRESSURE DROP IN THE COMPRESSOR, INTER-COOLER, AFTER-COOLER AND OIL- COOLER : NA |
|                             | 7. APPLICABLE STANDARDS : IS 6206 / IS11780                    |                      |                                                                                                                      |
|                             | 8. SITE DATA :                                                 |                      |                                                                                                                      |
| DESIGN DATA                 | 9.                                                             | DESIGN DATA (CONTD.) | 25. COMPRESSOR FRAME LUBRICATION :                                                                                   |
|                             | 10. TYPE : OIL INJECTED AIR - COOLED SCREW COMPRESSOR          |                      | SPLASH / <del>PRESSURISED</del>                                                                                      |
|                             | 11. FLUID TO BE COMPRESSED : AIR                               |                      | 26. TYPE OF CAPACITY CONTROL :                                                                                       |
|                             | 12. CAPACITY (FAD) : 35 CFM                                    |                      | <del>BY SPEED VARIATION</del> / AT CONSTANT SPEED                                                                    |
|                             |                                                                |                      | 27.                                                                                                                  |
|                             |                                                                |                      | 28.                                                                                                                  |
|                             |                                                                |                      | 29.                                                                                                                  |
|                             | 15. SUCTION PRESSURE : AMBIENT                                 |                      | 30. ADJUSTABLE RANGE FOR PRESSURE                                                                                    |
|                             | 16. SUCTION TEMPERATURE - AMBIENT                              |                      | SWITCHES : 6.0 TO 9.0 Kg/ cm <sup>2</sup>                                                                            |
| DUAL TYPE CONTROLS (CONTD.) | 17. DISCHARGE PRESSURE: 8.5 Kg/ cm <sup>2</sup> (g)            | DUAL TYPE CONTROLS   | 31. EXPECTED SETTING OF PRESSURE SWITCHES FOR : (NOTE-3)                                                             |
|                             | 18. MAXIMUM COMPRESSOR SPEED : * RPM                           |                      | 31.1 AUTO LOAD-UNLOAD REGULATION :                                                                                   |
|                             | 19. COOLING MEDIUM : FOR COMPRESSOR : AIR                      |                      | (a) LOAD : 7.5 Kg/ cm <sup>2</sup> (g)                                                                               |
|                             |                                                                |                      | (b) UNLOAD : 8.5 Kg/ cm <sup>2</sup> (g)                                                                             |
| DUAL TYPE CONTROLS (CONTD.) | 31.2 AUTO START-STOP REGULATION:                               |                      | 31.4 HIGH RECEIVER PRESSURE                                                                                          |
|                             | (a) START : 7.5 Kg/ cm <sup>2</sup> (g)                        |                      | ALARM : 9.35 Kg/ cm <sup>2</sup> (g)                                                                                 |
|                             | (b) STOP : 8.5 Kg/ cm <sup>2</sup> (g)                         |                      | 32. NUMBER OF STEPS FOR LOAD -                                                                                       |
|                             | 31.3 VERY LOW RECEIVER PRESSURE                                |                      | UNLOAD REGULATION : 2 / <del>3</del> / 4 /                                                                           |

|                        |                                                                                                                |                                                         |                                                                                                            |
|------------------------|----------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
|                        | ALARM : 6.8 Kg/ cm <sup>2</sup> (g)                                                                            | MATERIALS OF CONSTRUCTION FOR SCREW COMPRESSORS         | 49. CASING : CI IS 210 OR ASTM A 278 CL                                                                    |
|                        | 40 / FABRICATED STEEL ASTM A 353 / CAST STEEL ASTM A 216 GR WCB NORMALIZED / CAST SS ASTM A 743 AND 744 CA6-NM |                                                         | 50. ROTOR BODY : CI ASTM A 395 / FORGED STEEL AISI 1030-1045 / CAST ALUMINIUM ASTM B 26 ALLOY 355 OR C 355 |
|                        |                                                                                                                |                                                         | 51. SHAFT : FORGED STEEL AISI 1030-1035/ FORGED SS ASTM A151 TYPE 410 SS                                   |
|                        |                                                                                                                |                                                         |                                                                                                            |
|                        |                                                                                                                |                                                         |                                                                                                            |
| COMPRESSOR ACCESSORIES | 52. INTAKE FILTER TYPE : PAPER /                                                                               | INTER-COOLERS / AFTER-COOLERS / OIL-COOLERS DESIGN DATA | 69. DESIGNATION : INTER-COOLERS / AFTER-COOLERS                                                            |
|                        | 52.1 MATERIAL OF CONSTRUCTION                                                                                  |                                                         | 70. TAG NUMBERS FOR INTER-COOLERS :                                                                        |
|                        | CASING : MS / <del>ALUMINIUM</del>                                                                             |                                                         | 71. AFTER-COOLERS REQUIRED : YES / <del>NO</del>                                                           |
|                        | 53. SILENCER REQUIRED : YES                                                                                    |                                                         |                                                                                                            |
|                        | 54. DRIVE PULLEYS WITH V-BELT AND                                                                              |                                                         | 72. TAG NUMBERS FOR AFTER-COOLERS :                                                                        |
|                        | BELT GUARDS REQUIRED : YES                                                                                     |                                                         | 73. CAPACITY OF :                                                                                          |
|                        | 55. COUPLINGS AND COUPLING GUARDS REQUIRED : YES                                                               |                                                         | 73.1 INTER-COOLERS : 35 CFM                                                                                |
|                        | FOR DIRECT COUPLED COMPRESSORS                                                                                 |                                                         | 73.2 AFTER-COOLERS : 35 CFM                                                                                |
|                        | 56. SLIDE RAILS FOR MOTOR REQUIRED: YES                                                                        |                                                         | 74. TYPE : *                                                                                               |
|                        | 57. CONTROL CABINET REQUIRED : YES                                                                             |                                                         | 75. TYPE OF FLOW : COUNTER-CURRENT                                                                         |
|                        | 58. IMPULSE TUBING : COPPER /                                                                                  |                                                         | 76. OPERATING PRESSURE FOR AFTER                                                                           |
|                        | ADMIRALTY BRASS AS PER BS EN 1057                                                                              |                                                         | COOLERS :                                                                                                  |
|                        | EXCEPT FOR EDDY CURRENT TEST/                                                                                  |                                                         | 76.1 AIR SIDE: 7.0 (MAX.)Kg/ cm <sup>2</sup> (g)                                                           |
|                        | STAINLESS STEEL                                                                                                |                                                         | 76.2 WATER SIDE : NA                                                                                       |
|                        | 59. MOTOR BY : CONTRACTOR /                                                                                    |                                                         | 77. DESIGN PRESSURE FOR AFTER-COOLERS                                                                      |
|                        | PURCHASER                                                                                                      |                                                         |                                                                                                            |
|                        | 60. STARTER BY : CONTRACTOR /                                                                                  |                                                         | 77.1 AIR SIDE : *                                                                                          |
|                        | PURCHASER                                                                                                      |                                                         | 77.2 WATER SIDE : NA                                                                                       |
|                        | 61.                                                                                                            |                                                         | 78. MAXIMUM ACCEPTABLE OUTLET AIR                                                                          |
|                        | 62.                                                                                                            |                                                         | TEMPERATURE : 40 <sup>0</sup> C (NOTE-2)                                                                   |
|                        | 63.                                                                                                            |                                                         | 79. ALLOWABLE PRESSURE DROP OF AIR                                                                         |
|                        | 64.                                                                                                            |                                                         | THROUGH AFTER-COOLER :                                                                                     |
|                        | 65.                                                                                                            |                                                         | 0.2 Kg/ cm <sup>2</sup>                                                                                    |

|                                                    |                                                                                                                                                    |                      |                                                                    |
|----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|--------------------------------------------------------------------|
|                                                    | 66.                                                                                                                                                |                      | 80. DESIGN CODE : ASME SEC. VIII DIV. 1 AND TEMA                   |
|                                                    | 67.                                                                                                                                                |                      |                                                                    |
|                                                    | 68.                                                                                                                                                |                      | 81. CORROSION ALLOWANCE : 1.5 mm                                   |
| INTER-COOLERS/AFTERCOOLERS/<br>OIL-COOLERS – M O C | 82. SHELL : CS SA 106 GR B / IS 2002 /                                                                                                             |                      | 90. DESIGNATION : RECEIVER FOR AIR COMPRESSOR                      |
|                                                    | 83. TUBES : COPPER/ ADMIRALITY BRASS                                                                                                               |                      | 91. NUMBER REQUIRED: ONE (1 W) / ONE(1W)                           |
|                                                    | AS PER BS EN 1057 EXCEPT FOR EDDY CURRENT TEST / SS 316                                                                                            |                      | 92. TAG NUMBERS : LATER                                            |
|                                                    | 84. TUBE SHEETS : CS / BRASS                                                                                                                       |                      | 93. TYPE : <del>HORIZONTAL</del> / VERTICAL /                      |
|                                                    | 85. TUBE SUPPORT PLATES : IS 2062 /                                                                                                                |                      | CYLINDRICAL WITH WELDED DISHED ENDS                                |
|                                                    | 86.                                                                                                                                                |                      | 94. OPERATING PRESSURE : 7.5 Kg/ cm <sup>2</sup> (g)               |
| INTER-COOLERS / AFTER-COOLERS ACCESSORIES          | 87. MOISTURE AND OIL SEPARATOR WITH AUTO DRAIN TRAP TO BE PROVIDED WITH EACH INTER- COOLER AND AFTER-COOLER TO DISCHARGE MOISTURE AND OIL TO DRAIN | RECEIVER DESIGN DATA | 95. DESIGN PRESSURE : 10 Kg / cm <sup>2</sup> (g)                  |
|                                                    |                                                                                                                                                    |                      | 96. DESIGN TEMPERATURE : 60 °C                                     |
|                                                    |                                                                                                                                                    |                      | 97. NOMINAL VOLUME : 1.0 M <sup>3</sup>                            |
|                                                    |                                                                                                                                                    |                      | 98. DIMENSIONS :                                                   |
|                                                    |                                                                                                                                                    |                      | 98.1 HEIGHT TAN TO TAN : * mm                                      |
|                                                    |                                                                                                                                                    |                      | 98.2 DIAMETER : * mm                                               |
|                                                    | 87.1 TYPE OF MOISTURE AND OIL SEPARATOR : <del>CENTRIFUGAL/ DEMISTER PAD</del> / BAFFLE                                                            |                      | 99. APPLICABLE CODE : ASME SEC VIII DIV 1                          |
|                                                    |                                                                                                                                                    |                      | 100. CORROSION ALLOWANCE : 1.5 mm                                  |
|                                                    | 87.2 TYPE OF AUTO DRAIN TRAP : <del>/ BALL FLOAT / SOLENOID OPERATED /</del> ELECTRONIC LEVEL CONTROLLED                                           |                      | 101. SHELL AND DISHED END MATERIAL : IS 2002 <del>/IS 2062</del>   |
|                                                    | 88. MATERIAL OF CONSTRUCTION OF MOISTURE AND OIL SEPARATOR                                                                                         |                      | 102. INTERNAL PAINTING : BLACK BITUMINOUS                          |
|                                                    | 88.1 BODY/ SHELL : ASTM A 216 Gr. B                                                                                                                |                      | 103. INSULATION : <del>YES</del> / NO                              |
|                                                    |                                                                                                                                                    |                      | 104. SKIRT REQUIRED : LEG SUPPORT                                  |
|                                                    |                                                                                                                                                    |                      | 105.                                                               |
|                                                    | 89. MATERIAL OF CONSTRUCTION OF AUTO DRAIN TRAP                                                                                                    | RECEIVER ACCESSORIES | 106. MANHOLE WITH COVER FOR INSPECTION AND CLEANING REQUIRED : YES |
|                                                    | 89.1 BODY : ASTM A 216 Gr. B                                                                                                                       |                      |                                                                    |
|                                                    | 89.2 TRIM : BRONZE /SS                                                                                                                             |                      |                                                                    |

|                                 |                                                                                                                                            |                                          |                                                                                                                                      |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| MISCELLANEOUS                   | 109. ALL THE VALVES, SPECIALITIES INSTRUMENTS AND ACCESSORIES REQUIRED : YES                                                               | SPARES AND MAINTENANCE TOOLS AND TACKLES |                                                                                                                                      |
|                                 | 110. COUNTER FLANGES FOR ALL THE CONNECTIONS AT BATTERY LIMITS WITH NUTS, STUDS, BOLTS, GASKETS AND WASHERS REQUIRED : YES / <del>NO</del> |                                          | 124. ESSENTIAL SPARES                                                                                                                |
|                                 |                                                                                                                                            |                                          | 124.1                                                                                                                                |
|                                 |                                                                                                                                            |                                          | 124.2                                                                                                                                |
|                                 |                                                                                                                                            |                                          | 124.3                                                                                                                                |
|                                 | 110.1 FLANGES : REF. PIPING MATERIAL SPECIFICATION - GRADE GA                                                                              |                                          | 124.4                                                                                                                                |
|                                 | 111. FOUNDATION BOLTS FOR ALL THE EQUIPMENT REQUIRED : YES / <del>NO</del>                                                                 |                                          |                                                                                                                                      |
|                                 | 112. ERECTION BY CONTRACTOR : YES / <del>NO</del>                                                                                          |                                          |                                                                                                                                      |
| PAINTING                        | 115. PRIMER : EPOXY                                                                                                                        | TESTS AND INSPECTION                     | 126. PERFORMANCE TEST AT SITE REQUIRED : YES                                                                                         |
|                                 | 115.1 NUMBER OF COATS : 2                                                                                                                  |                                          |                                                                                                                                      |
|                                 | 115.2 DRY FILM THICKNESS : 25 $\mu$ COAT                                                                                                   |                                          | 127. APPLICABLE STANDARDS : IS 5456 / <del>API 618</del> / <del>API 617</del> / <del>API 672</del> / <del>API 619</del> / IS 11780 / |
|                                 | 116. FINISH PAINT : EPOXY                                                                                                                  |                                          |                                                                                                                                      |
|                                 | 116.1. NUMBER OF COATS : 2                                                                                                                 |                                          | 128.                                                                                                                                 |
|                                 | 116.2 DRY FILM THICKNESS : 50 $\mu$ COAT                                                                                                   |                                          | 129.                                                                                                                                 |
| COMPANION SPECIFICATIONS        | 117.                                                                                                                                       | PERFORMANCE GUARANTEES                   | 130. CAPACITY OF EACH COMPRESSOR : 35CFM (FAD)                                                                                       |
|                                 | 118.                                                                                                                                       |                                          | 131. DISCHARGE PRESSURE : 8.5 Kg/ cm <sup>2</sup> (g)                                                                                |
|                                 |                                                                                                                                            |                                          |                                                                                                                                      |
|                                 | 119. :                                                                                                                                     |                                          | 132. POWER CONSUMPTION :                                                                                                             |
|                                 |                                                                                                                                            |                                          | (+) 0 (-) * KW                                                                                                                       |
|                                 | 120.                                                                                                                                       |                                          | 133. TEMPERATURE OF AIR AT OUTLET OF AFTER COOLER                                                                                    |
|                                 |                                                                                                                                            |                                          |                                                                                                                                      |
|                                 | 121.                                                                                                                                       |                                          | 134. COOLING WATER FLOW RATE : NA                                                                                                    |
|                                 | 122.                                                                                                                                       |                                          |                                                                                                                                      |
| PERFORMANCE GUARANTEES (CONTD.) | 135.                                                                                                                                       |                                          | 139.                                                                                                                                 |
|                                 |                                                                                                                                            |                                          |                                                                                                                                      |
|                                 | 136.                                                                                                                                       |                                          | 140.                                                                                                                                 |
|                                 |                                                                                                                                            |                                          |                                                                                                                                      |
|                                 | 137.                                                                                                                                       |                                          | 141.                                                                                                                                 |
|                                 | 138.                                                                                                                                       |                                          | 142.                                                                                                                                 |
| BOU GHT -                       | 143. BEARINGS                                                                                                                              | SKF / FAG                                |                                                                                                                                      |
|                                 | 144. MOTORS                                                                                                                                | CG / BB / KEC                            |                                                                                                                                      |

|  |                                                                                                                                                                                                                                                                                                                                                                                            |                                    |
|--|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|
|  | 145. TURBINE                                                                                                                                                                                                                                                                                                                                                                               | ---                                |
|  | 146. ENGINE                                                                                                                                                                                                                                                                                                                                                                                | ----                               |
|  | 147. COUPLINGS                                                                                                                                                                                                                                                                                                                                                                             | FENNER                             |
|  | 148. V- BELTS                                                                                                                                                                                                                                                                                                                                                                              | FENNER                             |
|  | 149. VALVES & SPECIALITIES                                                                                                                                                                                                                                                                                                                                                                 |                                    |
|  | 150. AUTO DRAIN TRAPS                                                                                                                                                                                                                                                                                                                                                                      | SPIRAX                             |
|  | 151. VIBRATION DAMPENING PADS                                                                                                                                                                                                                                                                                                                                                              | DUNLOP                             |
|  | 152. CONTROL PANEL & INSTRUMENTS                                                                                                                                                                                                                                                                                                                                                           | RITTAL / PERO PRESIDENT / ENCLOTEK |
|  | 153. MCC                                                                                                                                                                                                                                                                                                                                                                                   | *                                  |
|  | <p><b><u>NOTES</u></b></p> <p>1. * VENDOR TO SPECIFY</p> <p>2. CONTRACTOR TO CONFIRM. THE SAME SHALL BE CONSIDERED IN AIR DRIER DESIGN.</p> <p>3. COMPRESSOR SHALL BE PROVIDED WITH BOTH ON/OFF REGULATION AND LOAD / UNLOAD REGULATION. A TOGGLE SWITCH SHALL BE PROVIDED TO SELECT THE MODE OF REGULATION.</p> <p>HOWEVER THE MOTOR SHALL BE SUITABLE FOR CONTINUOUS OPERATION DUTY.</p> |                                    |

### **6.13 SPECIFICATION FOR WELDED UNFIRED PRESSURE VESSEL**

#### **6.13.1 SCOPE**

This specification covers the general design, preparation of detailed fabrication drawings for review and approval, supply of materials, fabrication, stage-wise inspection, final inspection, testing, packing, forwarding, transportation and delivery at site of welded unfired pressure vessels.

#### **6.13.2 CODES AND STANDARDS**

- a) The design, materials, fabrication, inspection, testing and performance of welded unfired pressure vessels shall comply with all currently applicable design codes and standards, statutes, regulations and safety codes in the locality where the equipment is to be installed. The equipment shall also conform to the latest applicable Indian or equivalent standards. Other international standards are also acceptable, if these are established to be equal, or superior to the listed standards. Nothing in this specification shall be construed to relieve the VENDOR of this responsibility.

- b) If statutory approvals are specified in data sheet A, the VENDOR shall be responsible for obtaining all approvals on design, materials, stage-wise inspection, final inspection and testing of the vessel.

### 6.13.3 MATERIALS

- 6.13.3.1 All materials used in the fabrication of pressure vessels shall be as specified in the data sheets. Equivalent materials are acceptable only when approved by the PURCHASER in writing.
- 6.13.3.2 All plates shall be ultrasonically tested as follows :
- (a) For nominal thickness 20 mm and higher when used for fabrication of dished ends
  - (b) For nominal thickness 40 mm and higher when used for fabrication of shells
  - (c) For nominal thickness 50 mm and higher when used for blind flanges
  - (d) All thicknesses, when used for body flanges
- 6.13.3.3 The VENDOR shall ensure that code mandatory requirements of impact testing are met in accordance with the minimum design temperatures specified in the data sheets.
- 6.13.3.4 Any non-pressure parts such as cleats, pads at support lugs or legs, wear plates at saddles and pads at pipe supports etc., welded directly on to the pressure parts, shall be of the same material as the pressure parts.
- 6.13.3.5 Reinforcement pads at nozzles and other load bearing locations shall be of the same material and nominal thickness as the pressure part.
- 6.13.3.6 Material for skirt in case of alloy steel vessels and columns shall be the same as that of pressure part at least for a minimum length of 500 mm from bottom tan-line.

### 6.13.4 ALLOY STEEL PROTECTIVE LINING AND CLADDING

- 6.13.4.1 Lining is defined as loose strip lining and bush lining. Cladding may be by weld deposit overlay or explosion bonding or roll bonding.
- 6.13.4.2 Clad plate or lining shall conform to the following requirements :
- (a) Clad plate thickness shall be minimum 3 mm, unless specified otherwise.
  - (b) Clad plate made either by the explosion bonding process or reduction roll bonding process is acceptable.
  - (c) Clad plate shall meet the ASME code requirements of SA263, SA264, SA265 including bond test or AD-Merkblatter W-8. The shear bond test shall be executed as per SA264, Figure 1. Ultrasonic inspection shall be carried out in accordance with SA 578, acceptance level S-6.
  - (d) For the purpose of ensuring that cladding thickness of reduction roll-bonded clad plates is not less than 3 mm, each plate shall be inspected at the mill using a "coating gauge". Plates shall be scanned on at least three edges and one across



the width of the plate. Thickness shall be plotted at points not more than 600 mm apart. The VENDOR shall furnish a mill certificate, showing an outline of the plate and the points at which readings were taken together with the results.

- (e) Instead of lining, weld deposit overlay may also be considered.
- (f) At weld deposit overlay or clad-restoring welds, at least the same chemical composition shall be present at 3 mm depth, to be analysed by the welding procedure qualification in advance.
- (g) Weld deposit overlay and clad-restoring welds shall be dye penetrant tested and crack-free.
- (h) Weld deposit overlay and clad-restoring welds as a minimum, shall be qualified as per ASME Section IX.

6.13.4.3 Alloy steel lining shall not be used when cladding is specified. Alloy steel lining, when specified, shall be so designed that the distance between attachments does not exceed 150 mm.

6.13.4.4 The minimum required thickness of pressure parts shall exclude cladding or lining.

6.13.4.5 Cladding or lining requirements discussed in this specification are using low and high alloy steels only. For cladding or lining using non-ferrous and other materials, when specified, the VENDOR shall furnish on his drawings all details, including Welding Procedure Specification (WPS), for review and approval.

#### 6.13.5 MINIMUM THICKNESS

6.13.5.1 The thicknesses of the pressure parts as shown in the data sheets or drawings are the minimum acceptable thicknesses after manufacture, even though the code may permit a lesser thickness. The minimum acceptable thickness includes specified corrosion allowance.

6.13.5.2 The VENDOR shall be responsible for proper selection of plate thickness considering the fabrication and forming allowances, mill under-tolerances etc., to meet the minimum thickness requirements as specified.

#### 6.13.6 SHELLS

Shell courses shall be of the largest possible dimensions to minimise the number of weld seams.

#### 6.13.7 HEADS AND REDUCING SECTIONS

- a) Heads shall be of 2:1 ellipsoidal or equivalent ellipsoidal type (crown radius  $R = 0.9D$ , knuckle radius  $r = 0.17D$ ), unless specified otherwise, where  $D$  is the inside diameter of the shell.
- b) Reducing sections or conical bottoms shall have a knuckle radius of  $r = 0.06D$ , unless specified otherwise. However, knuckle radius shall not be less than 50 mm.
- c) Dished ends shall be seamless or 100% radiographed when made from more than one piece.

#### 6.13.8 AGITATOR ASSEMBLY

- a) Agitator assembly shall be complete with drive motor, mechanical seal with seal housing, bearings, gear box, agitator shaft with impellers, foot-step bearing with support, rigid coupling between agitator shaft and gear box output shaft with spool piece, flexible couplings between gear box and drive motor, suitable base plate and supporting structure for agitator drive arrangement and necessary fasteners etc. so as to make it complete in all respects.
- b) Drive motor and gear box shall be mounted on a common base frame and duly coupled and aligned through flexible couplings.
- c) Agitator shaft and gear box output shaft shall be coupled through a rigid coupling with split ring locking arrangement in order to ensure that agitator shaft does not fall into the vessel during operation.
- d) Agitator, shaft and impeller assembly shall be statically and dynamically balanced.
- e) The VENDOR shall obtain necessary approvals from the seal manufacturer regarding arrangement of assembly and application of API cooling plan etc. for the mechanical seal.
- f) The gear box shall be rated for heavy duty agitator service, continuously working for 24 hours a day and shall be suitable to withstand static and dynamic loads and bending moment on the gear box due to agitator shaft.
- g) Drive motor and gear box unit shall be provided with a suitable lifting eye hook.
- h) There shall be no oil spillage from gear box on to the vessel.
- i) Base frame shall be provided with suitable lifting lugs suitably designed for lifting complete agitator assembly.

#### 6.13.9 NOZZLES AND MANHOLES

- a) Nozzles fabricated from plates are acceptable for sizes larger than 250 mm NB in case of carbon and low alloy steels and 150 mm NB in case of high alloy steels. However, this is to be done with prior approval and subject to all welds being 100% radiographed.
- b) All nozzle sizes and quantities indicated in the data sheets are tentative and for bid purpose only. Final sizes and quantities are subject to confirmation during review of drawings. The CONTRACTOR shall include and confirm in his BID, that changes, to the extent of one size lower or higher for each nozzle and quantities plus or minus one number for each size, are acceptable at no extra cost to the PURCHASER.
- c) All nozzles with butt-welding end connections shall have edge preparation as per ANSI B16.25 suitable for connected piping inside diameter. Such nozzles shall have 100 mm extra stub length with pipe caps for hydrotest purpose.
- d) All nozzles of sizes 40 mm NB and below shall be gusseted as per the companion specification
- e) All openings in pressure parts shall be compensated for the area of opening as per code. Minimum width of pad shall be 50 mm.
- f) All load bearing areas in pressure parts shall be verified for buckling and local stresses. Adequate reinforcement shall be provided.
- g) Nozzle and manhole necks shall be flush with the inside surface of vessel, unless specified otherwise. Inside edges of manholes shall be smooth and rounded-off with a radius of 3 mm.

#### 6.13.10 FLANGES

- a) Unless specified otherwise, all nozzles shall be provided with rated flanges only, from consideration of interchangeability, as per the dimensional standards indicated in the data sheets.
- b) Bolt holes shall straddle the main vessel axes, unless specified otherwise.
- c) All flanges on nozzles shall be of forged construction with integral hubs. Plate or plate type forged flanges are not acceptable in place of forged flanges with integral hubs.
- d) All slip-on type flanges of sizes larger than 50 mm NB and girth flanges shall be provided with adequate venting arrangement during welding.

- e) Girth flanges, if made out of multiple plates, shall be a maximum of three segments. All welds shall be 100% radiographed. Pre-heating and postweld heat treatment shall be carried out as per code.
- f) Companion flanges specified with alloy steel liner shall be supplied with 100 mm long alloy steel stub ends with butt-welding edge preparation to suit connected pipe thickness.
- g) When companion flanges are of welding neck type, the same shall be to suit bore of connected pipe. However, this information shall be provided by the PURCHASER, during review of drawings.
- h) Blind flanges and covers intended for inspection or access openings shall be provided with adequate arrangement to facilitate opening and closing without undue effort.
- i) Unless specified otherwise, seating surfaces for non-metallic gaskets shall have stock or serrated finish. For other types of gaskets, the type of finish shall be furnished by the VENDOR on the drawings for review and approval.
- j) When flanges specified are of tongue and groove or male and female type, groove or female face shall be on the nozzle flanges and tongue or male face on the companion flanges.

#### 6.13.11 SUPPORTS

- a) All skirt supports shall have at least one access opening and adequate vent holes at the top of skirt.
- b) Skirt shall be provided with adequate holding and climbing rungs inside, above and below the skirt opening. Details shall be furnished by the VENDOR on the drawings for review and approval.

#### 6.13.12 MISCELLANEOUS

- a) The sizing of vessel internals shall be such that all removable parts can be removed through manholes.
- b) Wherever applicable and unless specified otherwise in data sheets all support rings, bolting bar for internals such as trays, tower packings, downcomers etc. shall be in the scope of the VENDOR.
- c) Internal baffles, tray support beams of other internals spanning a chord or diameter of the vessel shall be provided with a means for allowing differential expansion between the part and the vessel shell.

- d) Unless specified otherwise, baffles or weir plates shall not be welded directly to the shell or dished end of the vessel. These shall be bolted to the support attachments which are welded to the shell or dished end.
- e) The CONTRACTOR shall include two (2) numbers stainless steel name plates in his scope. This requirement is exclusive of manufacturer's name plate. The details on name plate shall be furnished during review of drawings.
- f) Lifting lugs shall be provided for all vessels. Details are subject to review and approval.
- g) Earthing cleats as per companion specification shall be provided at the approved locations.
- h) All pads at nozzles, supports etc. shall be provided with a tell-tale hole at the bottom-most location, which shall be tested with air at 1.0 kg/cm<sup>2</sup>(g) and checked with soap solution for leakage. Such tell-tale holes shall be plugged after satisfactory testing.
- i) For insulated or fire proofed vessels, insulation or fire proofing supports as per enclosed companion specification shall be provided by the VENDOR.
- j) Wherever platforms and ladders are specified in the data sheets, necessary supports shall be provided by the VENDOR as per details which shall be made available during review of drawings.
- k) Where materials are "free issue" as indicated in the enquiry specification or data sheet, the CONTRACTOR shall furnish along with the technical BID, a firm Bill of Materials (BOM) of all "free issue" items and also indicate cutting and wastage allowances both accountable and unaccountable.

#### 6.13.13 ANCHOR BOLTS

Anchor bolts are not included in the scope of supply of the VENDOR, unless specified otherwise in the data sheets.

#### 6.13.14 FABRICATION

- a) All welders, WPS and Procedure Qualification Records (PQR) shall meet the
- b) requirements of the specified code irrespective of pressure service or non-pressure service.
- c) Before welding, edges shall be checked in order to ascertain the absence of flaking, irregularities or serious defects.
- d) Stainless steel and high alloy steel fabrication shall have independent set of tools, grinding wheels and wire brushes etc.

- e) Welding shall be executed by qualified welders.
- f) Butt-welds shall have full penetration. Single sided welds shall be chipped back to sound metal and rewelded from the other side. Wherever chipping is not possible, root run shall be by TIG. Backing strip shall not be used without prior approval.
- g) Openings, reinforcing pads and attachments shall clear longitudinal and circumferential weld seams.
- h) Circumferential welds shall be situated 100 mm above or below the support rings and packing support rings meant for supporting internals, if specified.
- i) Circumferential and longitudinal weld seams shall clear saddles and support lugs. Longitudinal seams, in case of horizontal vessels, shall be at least 150 mm above saddle wear plate.
- j) Nozzle and reinforcement pads, where applicable, shall be set-in type and attached to the vessel by full penetration welds.
- k) Skirt to vessel heads joints shall have continuous flat-faced weld matching with outer diameter of the vessel. The width of the weld shall be equal to skirt thickness and height of weld shall be twice the width.
- l) All welds shall be deburred, free from under cuts, overlap ridges and valleys.
- m) No welding shall be carried out after stress relieving and/or postweld heat treatment. All flange faces shall be suitably protected against oxidation during heat treatment.

#### 6.13.15 FIELD ERECTION

- a) Where size or shape of vessel makes it impossible to ship it in one piece for erection by others, the VENDOR shall ship largest shop fabricated sections suitable for shipment and ease of handling for field erection and assembly. Fabrication and erection shall be completed at the site by the VENDOR.
- b) All pieces shall be shop fit-up into sections and each sections shall be fit to adjacent section and all pieces shall be match marked.
- c) The width of permissible gap during fit-up shall be in accordance with approved drawings and welding procedures and shall generally be 3 mm maximum with a tolerance of plus 0.8 mm to minus 0.0 mm.
- d) Flame cut edges shall be ground by the VENDOR as required to remove slag, detrimental discoloration and non-uniformity of edges.

- e) All radiographic requirements for welds completed in shop shall be made by the VENDOR before the parts of section leave the shop.

6.13.16 PAINTING

All carbon steel exteriors shall be descaled, edges deburred and wire brushed. Subsequently, all such surfaces shall be painted with two coats of red oxide primer.

6.13.17 ESSENTIAL AND RECOMMENDED SPARES

The CONTRACTOR shall include following essential spares in his scope of supply :

- a) Two (2) gaskets as spares for each nozzle
- b) Three (3) gaskets as spares for body flanges
- c) 10% spare fasteners of each size and length. However, the minimum quantity shall be four (4) for each size and length.





| SHOP INSPECTION REQUIREMENTS ROTATING MACHINES-MECHANICAL                                                                                                                                         |                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                |            |                     |                                |         |         |             |                 |                |                |           |                     |                            |                              |                               |            |            |               |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------------------|--------------------------------|---------|---------|-------------|-----------------|----------------|----------------|-----------|---------------------|----------------------------|------------------------------|-------------------------------|------------|------------|---------------|
| SERIAL NO.                                                                                                                                                                                        | DESCRIPTION                                            | VISUAL EXAMINATION                                                                                                                                                                                                                                                                                                                                                                                                                             | DIMENSIONS | MATERIAL TEST CERT. | IDENTIFICATION AND CORRELATION | POURING | PT / MT | RADIOGRAPHY | ULTRASONIC TEST | HEAT TREATMENT | SURFACE FINISH | LEAK TEST | ALIGNMENT/CLEARANCE | STATIC / DYNAMIC BALANCING | OPERATION PERFORMANCE / RISE | VIBRATION, NOISE, TEMPERATURE | STRIP DOWN | TYPE TESTS | ROUTINE TESTS |
| 1                                                                                                                                                                                                 | MATERIALS FOR PRESSURE PARTS, SHAFTS, IMPELLER / LOBES | D                                                                                                                                                                                                                                                                                                                                                                                                                                              |            | C                   | D                              | D       |         | B           | B               | C              |                |           |                     |                            |                              |                               |            |            |               |
| 2                                                                                                                                                                                                 | MACHINED SHAFT, IMPELLER / LOBES                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                |            |                     |                                |         | B       |             |                 |                | D              |           |                     |                            |                              |                               |            |            |               |
| 3                                                                                                                                                                                                 | ROTOR ASSEMBLY                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                |            |                     |                                |         |         |             |                 |                |                |           |                     | D                          |                              |                               |            |            |               |
| 4                                                                                                                                                                                                 | MOTORS                                                 | D                                                                                                                                                                                                                                                                                                                                                                                                                                              | D          |                     |                                |         |         |             |                 |                |                |           |                     |                            |                              |                               |            | B          | D             |
| 5                                                                                                                                                                                                 | COMPLETED ITEM                                         | A                                                                                                                                                                                                                                                                                                                                                                                                                                              | A          |                     |                                |         |         |             |                 |                |                | D         | D                   |                            | A                            | A                             | D          |            | B             |
| 6                                                                                                                                                                                                 | LININGS, IF ANY                                        | A                                                                                                                                                                                                                                                                                                                                                                                                                                              |            |                     |                                |         |         |             |                 |                |                |           |                     |                            |                              |                               |            |            | A             |
| LEGEND:<br>A - WITNESSED BY TCE.<br>B - WITNESSED BY TCE IF REQUIREMENT IS SPECIFIED.<br>C - RECORDS VERIFIED BY TCE WHEREVER APPLICABLE.<br>D - A OR C, AT TCE'S DISCRETION WHEREVER APPLICABLE. |                                                        | NOTES:<br>1 - ALL STAGES SHALL BE CHECKED 100 % BY VENDOR AND RECORDS THEREOF SHOWN TO TCE.<br>2 - WITNESSING BY TCE MAY BE 100 % OR ON RANDOM SAMPLES.<br>3 - THIS DOCUMENT SHALL BE READ IN CONJUNCTION WITH INSPECTION REQUIREMENTS MENTIONED IN RELEVANT TECHNICAL SPECIFICATIONS.<br>4 - THE PRESSURE GAUGES AND INSTRUMENTS FOR MEASURING CRITICAL PARAMETERS SHALL HAVE VALID CALIBRATION CERTIFICATE TRACEABLE TO NATIONAL LABORATORY. |            |                     |                                |         |         |             |                 |                |                |           |                     |                            |                              |                               |            |            |               |

| SHOP INSPECTION REQUIREMENTS AIR FILTERS                                                                                                                                                         |                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                |            |                           |                                                           |                            |                 |                                           |                                  |  |  |  |  |  |  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------------------------|-----------------------------------------------------------|----------------------------|-----------------|-------------------------------------------|----------------------------------|--|--|--|--|--|--|
| SERIAL NUMBER                                                                                                                                                                                    | DESCRIPTION              | VISUAL EXAMINATION                                                                                                                                                                                                                                                                                                                                                                                                                             | DIMENSIONS | MATERIAL TEST CERTIFICATE | INITIAL RESISTANCE CHARACTERISTIC TEST IN CLEAN CONDITION | DUST HOLDING CAPACITY TEST | EFFICIENCY TEST | PRESSURE DROP TEST IN SATURATED CONDITION | FILTER TO FRAME SEAL - LEAK TEST |  |  |  |  |  |  |
| 1                                                                                                                                                                                                | CABINET / FILTER FRAME   |                                                                                                                                                                                                                                                                                                                                                                                                                                                |            | C                         |                                                           |                            |                 |                                           |                                  |  |  |  |  |  |  |
| 2                                                                                                                                                                                                | FILTER MEDIUM            | A                                                                                                                                                                                                                                                                                                                                                                                                                                              | A          | C                         |                                                           |                            |                 |                                           |                                  |  |  |  |  |  |  |
| 3                                                                                                                                                                                                | DUST FOR EFFICIENCY TEST |                                                                                                                                                                                                                                                                                                                                                                                                                                                |            | C                         |                                                           |                            |                 |                                           |                                  |  |  |  |  |  |  |
| 4                                                                                                                                                                                                | AIR FILTER ASSEMBLY      | A                                                                                                                                                                                                                                                                                                                                                                                                                                              | A          |                           | A <sup>x</sup>                                            | A                          | A <sup>y</sup>  | A <sup>x</sup>                            | A                                |  |  |  |  |  |  |
|                                                                                                                                                                                                  |                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                |            |                           |                                                           |                            |                 |                                           |                                  |  |  |  |  |  |  |
|                                                                                                                                                                                                  |                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                |            |                           |                                                           |                            |                 |                                           |                                  |  |  |  |  |  |  |
| LEGEND:<br>A - WITNESSED BY TCE.<br>B - WITNESSED BY TCE IF REQUIREMENT IS SPECIFIED.<br>C - RECORDS VERIFIED BY TCE WHEREVER APPLICABLE.<br>D - A OR C, AT TCE'S DISCRETION WHEREVER APPLICABLE |                          | NOTES:<br>1 - ALL STAGES SHALL BE CHECKED 100 % BY VENDOR AND RECORDS THEREOF SHOWN TO TCE.<br>2 - WITNESSING BY TCE MAY BE 100 % OR ON RANDOM SAMPLES.<br>3 - THIS DOCUMENT SHALL BE READ IN CONJUNCTION WITH INSPECTION REQUIREMENTS MENTIONED IN RELEVANT TECHNICAL SPECIFICATIONS.<br>4 - THE PRESSURE GAUGES AND INSTRUMENTS FOR MEASURING CRITICAL PARAMETERS SHALL HAVE VALID CALIBRATION CERTIFICATE TRACEABLE TO NATIONAL LABORATORY. |            |                           |                                                           |                            |                 |                                           |                                  |  |  |  |  |  |  |
|                                                                                                                                                                                                  |                          | SHEET 1 OF 1                                                                                                                                                                                                                                                                                                                                                                                                                                   |            |                           |                                                           |                            |                 |                                           |                                  |  |  |  |  |  |  |

| SHOP INSPECTION REQUIREMENTS AIR DRYING PLANTS |                                                                                                                 |                    |            |                           |                                |                 |                        |        |                |         |             |                       |                     |                |                  |                      |            |               |                       |                |
|------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|--------------------|------------|---------------------------|--------------------------------|-----------------|------------------------|--------|----------------|---------|-------------|-----------------------|---------------------|----------------|------------------|----------------------|------------|---------------|-----------------------|----------------|
| SERIAL NUMBERS                                 | DESCRIPTION                                                                                                     | VISUAL EXAMINATION | DIMENSIONS | MATERIAL TEST CERTIFICATE | IDENTIFICATION AND CORRELATION | ULTRASONIC TEST | WELDING QUALIFICATIONS | FIT UP | BACK CHIP - PT | PT / MT | RADIOGRAPHY | HYDROSTATIC LEAK TEST | PNEUMATIC LEAK TEST | OPERATION TEST | PERFORMANCE TEST | SIMULATED PERF. TEST | TYPE TESTS | ROUTINE TESTS | PRODUCT CERTIFICATION | MANUFACTURER'S |
|                                                |                                                                                                                 |                    |            |                           |                                |                 |                        |        |                |         |             |                       |                     |                |                  |                      |            |               |                       |                |
| 1                                              | ADSORBER, FILTER, COOLERS / CHILLERS, HEAT EXCHANGERS, CONDENSER, MOISTURE SEPARATOR AND OTHER FABRICATED ITEMS | A                  | A          | C                         | D                              | B               | C/A                    | D      | D              | B       | B           | A                     | B                   |                |                  |                      |            |               |                       |                |
| 2                                              | BLOWER / COMPRESSOR                                                                                             | A                  | A          | C                         |                                |                 |                        |        |                |         |             |                       | C                   |                | A                |                      |            |               | C                     |                |
| 3                                              | VALVES - TWO WAY , FOUR WAY, SAFETY                                                                             | D                  | D          | C                         |                                |                 |                        |        |                |         |             | D                     |                     | D              |                  |                      |            |               | C                     |                |
| 4                                              | PIPES AND FITTINGS                                                                                              | A                  | A          | C                         | A                              |                 |                        |        |                |         |             |                       |                     |                |                  |                      |            |               |                       |                |
| 5                                              | INSTRUMENTS, DEW POINT APPARATUS, VALVE ACTUATOR                                                                |                    |            | C                         |                                |                 |                        |        |                |         |             |                       |                     | D              |                  |                      |            |               | C                     |                |
| 6                                              | HEATER                                                                                                          |                    |            | C                         |                                |                 |                        |        |                |         |             |                       |                     |                | D                |                      |            |               | C                     |                |
| 7                                              | MOTORS > 30 KW / < 30 KW                                                                                        | D                  | D          |                           |                                |                 |                        |        |                |         |             |                       |                     |                |                  |                      | C          | A/C           |                       |                |
| 8                                              | CONTROL PANEL                                                                                                   | A                  | A          | C                         |                                |                 |                        |        |                |         |             |                       |                     | A              |                  |                      |            | A             | C                     |                |
| 9                                              | COMPLETE ASSEMBLY                                                                                               | A                  | A          |                           |                                |                 |                        |        |                |         |             |                       | A                   |                |                  | A                    |            |               |                       |                |
| 10                                             | MISC., SUCH AS SILICA JEL                                                                                       |                    |            |                           |                                |                 |                        |        |                |         |             |                       |                     |                |                  |                      |            |               | C                     |                |
|                                                |                                                                                                                 |                    |            |                           |                                |                 |                        |        |                |         |             |                       |                     |                |                  |                      |            |               |                       |                |
|                                                |                                                                                                                 |                    |            |                           |                                |                 |                        |        |                |         |             |                       |                     |                |                  |                      |            |               |                       |                |

|                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                            |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| <p>LEGEND:</p> <p>A - WITNESSED BY TCE.</p> <p>B - WITNESSED BY TCE IF REQUIREMENT IS SPECIFIED.</p> <p>C - RECORDS VERIFIED BY TCE WHEREVER APPLICABLE.</p> <p>D - A OR C, AT TCE'S DISCRETION WHEREVER APPLICABLE.</p> | <p>NOTES:</p> <p>1 - ALL STAGES SHALL BE CHECKED 100 % BY VENDOR AND RECORDS THEREOF SHOWN TO TCE.</p> <p>2 - WITNESSING BY TCE MAY BE 100 % OR ON RANDOM SAMPLES.</p> <p>3 - THIS DOCUMENT SHALL BE READ IN CONJUNCTION WITH INSPECTION REQUIREMENTS MENTIONED IN RELEVANT TECHNICAL SPECIFICATIONS.</p> <p>4 - THE PRESSURE GAUGES AND INSTRUMENTS FOR MEASURING CRITICAL PARAMETERS SHALL HAVE VALID CALIBRATION CERTIFICATE TRACEABLE TO NATIONAL LABORATORY.</p> | <p>SHEET</p> <p>1 OF 1</p> |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|

## **6.14 SPECIFICATION FOR LOW VOLTAGE INDUCTION MOTORS**

### **6.14.1 SCOPE**

The specification covers the design, material, constructional features, manufacture, inspection and testing at the VENDOR'S/his SUB-VENDOR'S works, delivery to site and performance testing of Low Voltage induction motors rated up to 1000V.

### **6.14.2 CODES AND STANDARDS**

The design, material, construction, manufacture, inspection, testing and performance of induction motors shall comply with all currently applicable statutes, regulations and safety codes in the locality where the equipment will be installed. The equipment shall also conform to the applicable standards specified in data sheet A1 latest revision as on the date of offer. Nothing in this specification shall be construed to relieve the VENDOR of this responsibility. In case of conflict between the standards and this specification, this specification shall govern.

### **6.14.3 DRIVEN EQUIPMENT**

- a) When this specification forms part of the driven equipment specification, information not given in the Data Sheet-A will be governed by the driven equipment specification.
- b) Motors shall be capable of satisfactory operation for the application and duty as specified in the motor Data Sheet-A and as specified for the driven equipment.

### **6.14.4 PERFORMANCE AND CHARACTERISTICS**

- i) Motors shall be capable of giving rated output without reduction in the expected life span when operated continuously under either of the following supply conditions as specified in Data Sheet-A1.

|                                                    | <u>Supply Condition</u> |        |
|----------------------------------------------------|-------------------------|--------|
|                                                    | I                       | II     |
| Variation of supply voltage from rated voltage     | +/- 6%                  | +/-10% |
| Variation in supply frequency from rated frequency | +/-3%                   | +/- 5% |
| Combined voltage and frequency variation           | +/- 6%                  | +/-10% |

- ii) Motors shall be suitable for the method of starting specified in the Data Sheet-A.

- iii) The minimum permissible voltage shall be 85% of the rated voltage during motor starting
- iv) Motors shall be capable of starting and accelerating the load with the applicable method of starting, without winding temperatures reaching injurious levels, when the supply voltage is in the range of 85% of the rated motor voltage to maximum permissible voltage specified in Data Sheet-A1.
- v) The locked rotor current of the motor shall not exceed 600% of full load current (subject to tolerances as per the applicable standard) unless otherwise specified.
- vi) Motors shall be capable of developing the rated full load torque even if the supply voltage drops to 70% of the rated voltage. The pull out torque of the motor shall be atleast 205% of full load torque.
- vii) Motors when started with the driven equipment coupled shall be capable of withstanding at least two successive starts from cold conditions & one start from hot condition without injurious heating of windings. The motors shall also be suitable for three equally spread starts per hour under the above referred supply conditions.
- viii) Motors shall be of Energy Efficient type if specified in Data sheet-A1. Category of Energy efficiency shall be as mentioned in data sheet-A1

#### 6.14.5 INSULATION

- i) The insulation shall be given tropical and fungicidal treatment for successful operation of the motor in hot, humid and tropical climate.
- ii) Insulation of VFD controlled Motors shall be designed to withstand a dv/dt of 0.1 micro sec rise from 10 % to 90 % of steady voltage and a maximum peak of 1600 volts as per NEMA standard MG1 Part 31.40.4.2

#### 6.14.6 TEMPERATURE RISE

- i) The temperature rises shall not exceed the values given in IS 12802. Under extremes of supply condition (clause 4.1 above), the temperature rise shall not exceed the value indicated in IS by 10°C.
- ii) For motors specified for outdoor installation heating due to direct exposure to solar radiation shall be considered.

#### 6.14.7 CONSTRUCTIONAL FEATURES

- i) All windings shall be of Copper.

- ii) Motors weighing more than 25 kg. shall be provided with eyebolts, lugs or other means to facilitate safe lifting.

#### 6.14.8 BEARINGS

- i) Unless otherwise specified in data sheet-A, motor bearings shall not be subjected to any external thrust load.
- ii) Unless otherwise specified, motor bearings shall have an estimated life of atleast 40,000 hrs.
- iii) The bearings shall permit running of the motor in either direction of rotation.
- iv) When forced oil lubrication or water cooling is required, prior approval from the purchaser shall be obtained.
- v) It shall be possible to lubricate the bearings without dismantling any part of the motor.
- vi) On line Greasing shall be provided for motors of 15kW and above.
- vii) VFD controlled Motors shall have their bearings insulated to prevent motor shaft currents from entering the bearing race.

#### 6.14.9 TERMINAL BOX

- i) Terminal boxes shall have a degree of protection of atleast IP 55 for out door applicable
- ii) Unless otherwise approved, the terminal box shall be capable of being turned through 3600 in steps of 900.
- iii) Terminals shall be of stud type & the terminal box shall be complete with necessary lugs, nuts, washers.
- iv) When single core cables are to be used the gland plates shall be of non magnetic material.
- v) Sizes of terminal boxes and lugs shall be as given in Table-I, unless specified otherwise in data sheet A
- vi) TABLE-I

415 V MOTORS - SIZES OF CABLES, STUDS, TERMINAL LUGS & TERMINAL BOXES

(TO BE PROVIDED ON MOTORS BY VENDOR)

| Sr. No. | Motor Rating<br>( kW) | 1100V Al Conductor, armoured<br>PVC/XLPE Cable |
|---------|-----------------------|------------------------------------------------|
|---------|-----------------------|------------------------------------------------|

|    |           | <b>Cores x mm2</b> |
|----|-----------|--------------------|
| 1  | Upto 3    | 3x4                |
| 2  | 3.1 – 7.5 | 3x6                |
| 3  | 7.6 – 15  | 3x16               |
| 4  | 16 – 25   | 3x35               |
| 5  | 26 – 40   | 3x70               |
| 6  | 41 – 55   | 3x120              |
| 7  | 56 – 70   | 3x185              |
| 8  | 71 – 85   | 3x240              |
| 9. | 86 – 110  | 3x400              |
| 10 | 111 – 200 | 3x1Cx500           |

#### 6.14.10 PAINT AND FINISH

All motor parts exposed directly to atmosphere shall be finished and painted to produce a neat and durable surface which would prevent rusting and corrosion. The equipment shall be thoroughly degreased, all rust, sharp edges and scale removed and treated with one coat of primer and finished with two coats of grey enamel paint.

#### 6.14.11 HEATING DURING IDLE PERIODS

Motors rated above 30 kW shall have space heaters suitable for 240V, single phase, 50 Hz, AC supply. Space heaters shall have adequate capacity to maintain motor internal temperature above dew point to prevent moisture condensation during idle period. The space heaters shall be placed in easily accessible positions in the lowest part of the motor frame.

#### 6.14.12 ACCESSORIES

- i) Two independent earthing points shall be provided on opposite sides of the motor, for bolted connection of the PURCHASER'S earthing conductors as specified in data sheet-A. These earthing points shall be in addition to earthing stud provided in the terminal box.



- ii) Except when otherwise specified, the motors shall be provided with a bare shaft extension having a key slot and a key at the driving end.

#### 6.14.13 TESTS

- i) All Motors shall be subjected to all the routine tests as per applicable standard in the presence of the PURCHASER's representative.
- ii) Type tests Certificates shall be furnished for motors below 37kW. If type tests have not been carried out on similar Motors, or if the type test reports submitted are not found in order, then VENDOR shall carry out these tests without any extra cost to the Purchaser.
- iii) Following Type tests shall be performed in the presence of the PURCHASER's representative for motor rating of 37kW and above, one of each rating:
- Temperature rise test
  - Full load test to determine efficiency, power factor and slip
  - Momentary overload test
  - Test for vibration severity of motor
  - Test for Noise level of motor
  - Overspeed test
  - Pull out torque measurement (Direct/ Calculations)
  - Starting torque measurement (Direct/ Calculations)
- iv) For other type tests, certificates shall be provided for similar rating of the motors.
- v) Type and routine tests, as specified in the distribution schedule, shall be furnished for the PURCHASER's approval.
- vi) All the meters, instruments, devices used for the testing purpose shall be properly calibrated by standard authorised agencies which shall be traceable to National standards. For each such instrument proper validity of calibration shall be documented by Vendor.

|     |                  |  |                                                       |
|-----|------------------|--|-------------------------------------------------------|
| 1.0 | GENERAL          |  |                                                       |
| 1.1 | APPLICATION:     |  | FAN                                                   |
| 1.2 | NUMBER OF UNITS: |  | (*)                                                   |
| 1.3 | TYPE OF MOTOR    |  | <b>SQUIRREL CAGE (Energy efficient – EFF-1) type.</b> |

|       |                                                         |     |                                                                         |
|-------|---------------------------------------------------------|-----|-------------------------------------------------------------------------|
| 1.4   | SUPPLY SYSTEM FAULT LEVEL                               | MVA | 38MVA,50kA                                                              |
| 1.5   | SUPPLY NEUTRAL – TYPE OF EARTHING                       |     | EFFECTIVELY EARTHED SYSTEM                                              |
| 2.0   | RATING                                                  |     |                                                                         |
| 2.1   | RATED OUTPUT                                            |     | kW (*)                                                                  |
| 2.2   | RATED VOLTAGE                                           |     | 415V                                                                    |
| 2.3   | NUMBER OF PHASES & FREQUENCY:                           |     | 3 PHASE, 50 Hz                                                          |
| 2.4   | VOLTAGE AND FREQUENCY VARIATION                         |     | Voltage variation - +/-10%, Frequency Variation - +/-3%, Combined - 10% |
| 2.5   | SYNCHRONOUS SPEED                                       |     | RPM(*)                                                                  |
| 3.0   | DUTY                                                    |     |                                                                         |
| 3.1   | TYPE OF DUTY(CLAUSE 10.2 OF IS 325 OR CL9.3 OF IS 4722) |     | (*)                                                                     |
| 3.2   | POWER REQUIRED BY LOAD                                  |     | (*)                                                                     |
| 4.0   | METHOD OF STARTING:                                     |     | D.O.L.                                                                  |
| 5.0   | INSULATION                                              |     |                                                                         |
| 5.1   | CLASS OF INSULATION:                                    |     | F WITH TEMP. RISE CLASS-B                                               |
| 5.2   | PEF AMBIENT TEMPERATURE                                 |     | 45 <sup>0</sup> C                                                       |
| 5.3   | TEMPERATURE RISE BY                                     |     |                                                                         |
| 5.3.1 | BY THEROMOMETER METHOD                                  |     | 65 <sup>0</sup> C                                                       |
| 5.3.2 | BY WINDING RESISTANCE METHOD                            |     | 75 <sup>0</sup> C (CLASS B)                                             |
| 6.0   | INSTALLATION                                            |     |                                                                         |
| 6.1   | LOCATION                                                |     | Indoor/Outdoor (*)                                                      |
| 6.2   | HAZARDOUS AREA DIVISION<br>(IS: 5572 OR EQUIVALENT:)    |     | NOT APPLICABLE                                                          |
| 6.3   | ATMOSPHERE                                              |     | REFER SEC.B                                                             |
| 7.0   | ENCLOSURE                                               |     |                                                                         |
| 7.1   | TYPE OF COOLING (IS 6362)                               |     | TEFC                                                                    |

|       |                                                                      |  |                                                                                                                              |
|-------|----------------------------------------------------------------------|--|------------------------------------------------------------------------------------------------------------------------------|
| 7.2   | DESIGNATION OF DEGREE OF PROTECTION (IS 4691)                        |  | IP 55                                                                                                                        |
| 8.0   | MAIN TERMINAL BOX                                                    |  |                                                                                                                              |
| 8.1   | LOCATION AS SEEN FROM NON- DRIVE END                                 |  | RIGHT/LEFT/TOP (*)                                                                                                           |
| 8.2   | RATING<br>1, SHORT TIME<br>CURRENT:<br>DURATION:<br>2. DYNAMIC       |  | (*)<br><br>50kA (RMS)<br>0.25 SECS<br>kA (PEAK)                                                                              |
| 8.3   | EXTERNAL CABLE DETAILS                                               |  | (#)                                                                                                                          |
| 8.3.1 | TYPE                                                                 |  |                                                                                                                              |
| 8.3.2 | SIZE AND NUMBER OF CORES                                             |  |                                                                                                                              |
| 8.4   | EARTHING CONDUCTORS                                                  |  |                                                                                                                              |
| 8.4.1 | MATERIAL                                                             |  | Copper Insulated cable                                                                                                       |
| 8.4.2 | SIZE                                                                 |  | (#)                                                                                                                          |
| 9.0   | MISCELLANEOUS REQUIREMENT                                            |  |                                                                                                                              |
| 9.1   | SHAFT ORIENTATION:                                                   |  | HORIZONTAL/VERTICAL/HOLLOW VERTICAL (*)                                                                                      |
| 9.2   | MOUNTING SYMBOL (IS :2253 OR EQUIVALENT)                             |  | (*)                                                                                                                          |
| 9.3   | ROTATION AS SEEN FROM NON-DRIVEN END                                 |  | CLOCKWISE/ANTICLOCKWISE(*)                                                                                                   |
| 9.4   | TYPE OF BEARING                                                      |  | DRIVE END/NON DRIVE END(*)                                                                                                   |
| 9.5   | WHETHER BED PLATE REQUIRED                                           |  | YES/NO (#)                                                                                                                   |
| 10.0  | COLOUR SHADES OF PLANT IF SPECIAL                                    |  | Light Gray – Shade 631 of IS-5. Special varnishing and painting treatment to be given as the atmosphere is highly corrosive. |
| 11.0  | CTS FOR DIFFERENTIAL PROTECTION REQUIRED                             |  | NO                                                                                                                           |
| 11.1  | \$ CT PARTICULARS<br>A) 3 CTS, ONE IN THE NEUTRAL LEAD OF EACH PHASE |  | NOT APPLICABLE                                                                                                               |

|        |                                                                                                                                                                   |  |                                                      |
|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------------------------------------------|
|        | B) RATIO<br>C) CLASS P. S.<br>D) KNEE POINT VOLTAGE<br>E) MAX. R. C. T.<br>SECONDARY WINDING,<br>F) MAX. EXCITING<br>CURRENT AT 1/2 KPV<br>G) CLASS OF INSULATION |  |                                                      |
| 11.2   | VIBRATION PADS<br>REQUIRED                                                                                                                                        |  | (#)                                                  |
| 12.0   | TEMPERATURE<br>DETECTORS / INDICATORS                                                                                                                             |  |                                                      |
| 12.1.1 | EMBEDDED TEMPERATURE<br>DETECTORS FOR WINDING<br>REQUIRED                                                                                                         |  | NO                                                   |
| 12.1.2 | EMBEDDED TEMPERATURE<br>DETECTORS FOR BEARINGS<br>REQUIRED                                                                                                        |  | NO                                                   |
| 12.1.3 | BEARING THERMOMETERS<br>FOR DRIVING END & NON<br>DRIVING ENDS REQUIRED                                                                                            |  | NO                                                   |
| 12.1.4 | THERMISTERS FOR<br>MOTORS REQUIRED                                                                                                                                |  | YES FOR MOTORS ABOVE 110 kW<br>AND VFD DRIVEN MOTORS |
| 13.0   | SPACE HEATERS FOR<br>MOTORS REQUIRED                                                                                                                              |  | YES FOR MOTORS ABOVE 30 KW                           |

NOTES:

7. DETAILS MARKED THUS (\*) WILL BE DECIDED AND INTIMATED BY THE CONTRACTOR BASED ON DRIVEN EQUIPMENT CHARACTERISTICS
2. DATA MARKED THUS (#) WILL BE INTIMATED TO VENDOR AFTER PLACEMENT OF ORDER.

|    |                                       |         |               |             |
|----|---------------------------------------|---------|---------------|-------------|
| 1. | INDUCTION MOTORS – THREE PHASE        | IS-325  | BS EN-60034-1 | IEC-60034-1 |
| 2. | ROTATING ELECTRICAL MACHINES          | IS-4722 |               |             |
| 3. | SINGLE PHASE INDUCTION MOTOR          | IS-996  |               |             |
| 4. | CODE OF PRACTICE FOR CLIMATE PROOFING |         | BS EN-60034-5 | IEC-60034-5 |

|     |                                                                                                   |          |                |              |
|-----|---------------------------------------------------------------------------------------------------|----------|----------------|--------------|
| 5.  | DESIGNATIONS FOR TYPES OF CONSTRUCTION AND MOUNTING ARRANGEMENTS OF ROTATING ELECTRICAL MACHINES  | IS-2253  | BS EN-60034-7  | IEC-60034-7  |
| 6.  | TERMINAL MARKING FOR ROTATING ELECTRICAL MACHINERY                                                | IS-4728  | BS EN-60034-8  | IEC-60034-8  |
| 7.  | DESIGNATION OF METHODS OF COOLING FOR ROTATING ELECTRICAL MACHINES                                | IS-6362  | BS EN-60034-6  | IEC-60034-6  |
| 8.  | DEGREE OF PROTECTION PROVIDED BY ENCLOSURE FOR ROTATING ELECTRICAL MACHINERY                      | IS-4691  | BS EN-60034-3  | IEC-60034-3  |
| 9.  | GUIDE FOR TESTING THREE PHASE INDUCTION MOTORS                                                    | IS-4029  | BS EN-60079-1  | IEC-60034-1  |
| 10. | MEASUREMENT AND EVALUATION OF VIBRATION OF ROTATING ELECTRICAL MACHINES                           | IS-12075 | BS EN-60034-14 | IEC-60034-14 |
| 11. | CLASSIFICATION OF HAZARDOUS AREAS FOR ELECTRICAL INSTALLATION                                     | IS-5572  | BS EN-60079-10 | IEC-60079-10 |
| 12. | DESIGNATION OF SLIDE RAILS FOR ELECTRIC MOTOR                                                     | IS-2968  | BS EN-60034-1  |              |
| 13. | PERMISSIBLE LIMITS FOR NOISE LEVEL FOR ROTATING ELECTRICAL MACHINES                               | IS-12065 | BS EN-60034-9  | IEC-60034-9  |
| 14. | GUIDE FOR TESTING INSULATION RESISTANCE OF ROTATING MACHINE                                       | IS-7816  |                |              |
| 15. | TEST PROCEDURES FOR MEASUREMENT OF LOSS TANGENT ANGLE OF COIL AND BAR FOR MACHINE WINDING - GUIDE | IS-13508 |                |              |
| 16. | IMPULSE VOLTAGE WITHSTAND LEVEL                                                                   |          |                | IEC-60034-15 |
| 17. | INDUCTION MOTORS - ENERGY EFFICIENT                                                               | IS-12615 |                |              |
| 18. | TEMPERATURE RISE MEASUREMENT OF ROTATING ELECTRICAL MACHINES                                      | IS-12802 |                |              |
| 19. | TYPE OF DUTY AND CLASSES OF RATING ASSIGNED TO ROTATING ELECTRICAL MACHINES                       | IS-12824 |                |              |

|     |                                                                                             |          |             |              |
|-----|---------------------------------------------------------------------------------------------|----------|-------------|--------------|
| 20. | ADJUSTABLE SPEED ELECTRICAL POWER DRIVE SYSTEM- EMC REQUIREMENTS AND SPECIFIC TEST METHODS. |          | BS-EN-61800 | IEC-61800    |
| 21. | DIMENSIONS AND OUTPUT SERIES FOR ROTATING ELECTRICAL MACHINES.                              | IS-1231  | BS-4999-141 | IEC-60072-1  |
| 22. | ELECTRICAL APPARATUS FOR EXPLOSIVE GAS ATMOSPHERE – CLASSIFICATION OF HAZARDOUS AREA.       | IS-5571  | BS-EN-60079 | IEC-60079-10 |
| 23. | TEMPERATURE RISE MEASUREMENT OF ROTATING ELECTRICAL MACHINES                                | IS-12802 |             |              |

NOTE : EQUIPMENT, ASSOCIATED ACCESSORIES, COMPONENTS/PARTS, RAW MATERIAL AND TESTS SHALL IN GENERAL CONFORM TO IS.

#### **DATASHEET : PRESSURE INDICATORS**

| PRESSURE INDICATORS      |                                                                                                                                |                                                                                             |                                     |          | SH 1 OF 1                                                                           |                                     |                                     |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|-------------------------------------|----------|-------------------------------------------------------------------------------------|-------------------------------------|-------------------------------------|
| DATA SHEET               |                                                                                                                                |                                                                                             |                                     |          |                                                                                     |                                     |                                     |
| FEATURES                 | MANUFACTURER :                                                                                                                 |                                                                                             | *                                   | MATERIAL | 25                                                                                  | HOUSING : DIE CAST ALUMINIUM        | <input checked="" type="checkbox"/> |
|                          | MODEL NO. :                                                                                                                    |                                                                                             | *                                   |          | 26                                                                                  | PRESSURE ELEMENT : SS 304           | <input checked="" type="checkbox"/> |
|                          | 1                                                                                                                              | PRESSURE ELEMENT : BOURDON                                                                  | <input checked="" type="checkbox"/> |          | 27                                                                                  | POINTER : ALUMINIUM                 | <input checked="" type="checkbox"/> |
|                          | 2                                                                                                                              | TYPE : DIRECT READING <input checked="" type="checkbox"/> RECEIVER <input type="checkbox"/> | <input checked="" type="checkbox"/> |          | 28                                                                                  | MOVEMENT : SS 304                   | <input checked="" type="checkbox"/> |
|                          | 3                                                                                                                              | MOUNTING : PIPE <input checked="" type="checkbox"/> FLUSH <input type="checkbox"/>          | <input checked="" type="checkbox"/> |          | 29                                                                                  | SOCKET : SS 304                     | <input checked="" type="checkbox"/> |
|                          | 4                                                                                                                              | DIAL SIZE : 150mm(6") <input type="checkbox"/> 4 1/2" <input checked="" type="checkbox"/>   | <input checked="" type="checkbox"/> |          | 30                                                                                  | DIAL : ALUMINIUM ; RING : ALUMINIUM | <input checked="" type="checkbox"/> |
|                          | 5                                                                                                                              | DIAL COLOUR : WHITE NUMERALS : BLACK                                                        | <input checked="" type="checkbox"/> |          | 31                                                                                  | GLASS : SHATTER PROOF               | <input checked="" type="checkbox"/> |
|                          | 6                                                                                                                              | POINTER : MICROMETER ADJ                                                                    | <input checked="" type="checkbox"/> |          | 32                                                                                  | CAPILLARY AND ARMOUR :              | <input checked="" type="checkbox"/> |
|                          | 7                                                                                                                              | FRONT RING : SCREWED                                                                        | <input checked="" type="checkbox"/> |          | 33                                                                                  | DIAPH. SEAL/BODY :                  | <input checked="" type="checkbox"/> |
|                          | 8                                                                                                                              | ACCURACY : $\pm$ 0.5% OF SPAN                                                               | <input checked="" type="checkbox"/> |          | 34                                                                                  | SYPHON :                            | <input checked="" type="checkbox"/> |
|                          | 9                                                                                                                              | OVERRANGE PROTECTION : 1.5 TIMES                                                            | <input checked="" type="checkbox"/> |          | 35                                                                                  | SNUBBER : SS 304                    | <input checked="" type="checkbox"/> |
|                          | 10                                                                                                                             | MAX. PRESSURE                                                                               | <input checked="" type="checkbox"/> |          | 36                                                                                  | PROCESS : 1/2" NPT (M)              | <input checked="" type="checkbox"/> |
|                          | ENCLOSURE                                                                                                                      | 11                                                                                          |                                     |          |                                                                                     | 37                                  | PROCESS(DIAPH. SEAL):               |
| 12                       |                                                                                                                                |                                                                                             |                                     | 38       | LOCATION : BOTTOM <input checked="" type="checkbox"/> BACK <input type="checkbox"/> | <input checked="" type="checkbox"/> |                                     |
| 13                       |                                                                                                                                |                                                                                             |                                     | 39       |                                                                                     | <input checked="" type="checkbox"/> |                                     |
| 14                       |                                                                                                                                | CASE : IP 67 AS PER IS 13947                                                                | <input checked="" type="checkbox"/> | 40       |                                                                                     | <input checked="" type="checkbox"/> |                                     |
| SUPPLY/SIGNAL            | 15                                                                                                                             | CASE COLOUR : GREY <input type="checkbox"/> BLACK <input checked="" type="checkbox"/>       | <input checked="" type="checkbox"/> | 41       |                                                                                     | <input checked="" type="checkbox"/> |                                     |
|                          | 16                                                                                                                             | BLOW OUT DISC : REQ.                                                                        | <input checked="" type="checkbox"/> | 42       |                                                                                     | <input checked="" type="checkbox"/> |                                     |
|                          | 17                                                                                                                             |                                                                                             |                                     | 43       |                                                                                     | <input checked="" type="checkbox"/> |                                     |
|                          | 18                                                                                                                             |                                                                                             |                                     | 44       | NAME PLATE : FIXED / SS                                                             | <input checked="" type="checkbox"/> |                                     |
| CONNECTIONS & DIMENSIONS | 19                                                                                                                             |                                                                                             |                                     | 45       | SNUBBER : REFER NOTE 5                                                              | <input checked="" type="checkbox"/> |                                     |
|                          | 20                                                                                                                             |                                                                                             |                                     | 46       |                                                                                     | <input checked="" type="checkbox"/> |                                     |
|                          | 21                                                                                                                             |                                                                                             |                                     | 47       | METAL TAGS - SS                                                                     | <input checked="" type="checkbox"/> |                                     |
|                          | 22                                                                                                                             |                                                                                             |                                     | 48       | MOUNTING BRACKET                                                                    | <input checked="" type="checkbox"/> |                                     |
|                          | 23                                                                                                                             |                                                                                             |                                     | 49       | CHEMICAL DIAPHRAGM                                                                  | <input checked="" type="checkbox"/> |                                     |
|                          | 24                                                                                                                             |                                                                                             |                                     | 50       | ARMOURED CAPILLARY                                                                  | <input checked="" type="checkbox"/> |                                     |
|                          | 25                                                                                                                             |                                                                                             |                                     |          |                                                                                     | <input checked="" type="checkbox"/> |                                     |
|                          | 26                                                                                                                             |                                                                                             |                                     |          |                                                                                     | <input checked="" type="checkbox"/> |                                     |
| ACCESSORIES (REF NOTE 4) | 27                                                                                                                             |                                                                                             |                                     |          |                                                                                     | <input checked="" type="checkbox"/> |                                     |
|                          | 28                                                                                                                             |                                                                                             |                                     |          |                                                                                     | <input checked="" type="checkbox"/> |                                     |
|                          | 29                                                                                                                             |                                                                                             |                                     |          |                                                                                     | <input checked="" type="checkbox"/> |                                     |
| CODES & STD.             | 51                                                                                                                             | IS 3624                                                                                     | <input checked="" type="checkbox"/> |          |                                                                                     | <input checked="" type="checkbox"/> |                                     |
|                          | 52                                                                                                                             | ASME PTC 19.2                                                                               | <input checked="" type="checkbox"/> |          |                                                                                     | <input checked="" type="checkbox"/> |                                     |
|                          | 53                                                                                                                             | IS 2147                                                                                     | <input checked="" type="checkbox"/> |          |                                                                                     | <input checked="" type="checkbox"/> |                                     |
| SPARES                   | 54                                                                                                                             |                                                                                             | <input checked="" type="checkbox"/> |          |                                                                                     | <input checked="" type="checkbox"/> |                                     |
|                          | 55                                                                                                                             |                                                                                             | <input checked="" type="checkbox"/> |          |                                                                                     | <input checked="" type="checkbox"/> |                                     |
|                          | 56                                                                                                                             |                                                                                             | <input checked="" type="checkbox"/> |          |                                                                                     | <input checked="" type="checkbox"/> |                                     |
| TESTS                    | 57                                                                                                                             | CALIBRATION / HYDRO TEST (1.5 TIMES OF MAX. PR.)                                            | <input checked="" type="checkbox"/> |          |                                                                                     | <input checked="" type="checkbox"/> |                                     |
|                          | 58                                                                                                                             | CERTIFICATES OF TEST HOUSE EVALUATION FOR ACCURACY, REPEATABILITY & RELIABILITY             | <input checked="" type="checkbox"/> |          |                                                                                     | <input checked="" type="checkbox"/> |                                     |
|                          | 59                                                                                                                             | VENDOR TO SUBMIT ALL TEST CERTIFICATES FOR CONSULTANT / PURCHASER'S REVIEW & RECORDS        | <input checked="" type="checkbox"/> |          |                                                                                     | <input checked="" type="checkbox"/> |                                     |
| DWG.                     | 60                                                                                                                             | VENDOR TO SUBMIT DATA SHEETS, DRAWINGS AND MANUALS FOR THE EQUIPMENT FOR APPROVAL           | <input checked="" type="checkbox"/> |          |                                                                                     | <input checked="" type="checkbox"/> |                                     |
|                          | 61                                                                                                                             |                                                                                             | <input checked="" type="checkbox"/> |          |                                                                                     | <input checked="" type="checkbox"/> |                                     |
| NOTES                    | 1. BIDDER TO SUBMIT LIST OF INSTALLATIONS AND COMMISSIONS FOR THE MAKE & TYPE OF GAUGE OFFERED AND USERS' CERTIFICATES         |                                                                                             |                                     |          |                                                                                     |                                     |                                     |
|                          | 2. *BIDDER TO FURNISH DETAILS ;                                                                                                |                                                                                             |                                     |          |                                                                                     |                                     |                                     |
|                          | 3. VOID                                                                                                                        |                                                                                             |                                     |          |                                                                                     |                                     |                                     |
|                          | 4. ALL ACCESSORIES SHALL BE SUPPLIED UNLESS OTHERWISE AS SPECIFICALLY BROUGHT OUT IN BILL OF MATERIAL IN THE FOLLOW UP SHEETS. |                                                                                             |                                     |          |                                                                                     |                                     |                                     |
|                          | 5. VENDOR TO PROVIDE SNUBBER FOR SERVICES WHERE PULSATIONS ARE ENCOUNTERED.                                                    |                                                                                             |                                     |          |                                                                                     |                                     |                                     |
|                          |                                                                                                                                |                                                                                             |                                     |          |                                                                                     |                                     |                                     |
|                          |                                                                                                                                |                                                                                             |                                     |          |                                                                                     |                                     |                                     |
|                          |                                                                                                                                |                                                                                             |                                     |          |                                                                                     |                                     |                                     |

## DATASHEET : PRESSURE SWITCHES

|               |                                                                                                                                |                                                                                               |    |                               |                          |                                |                                    |   |
|---------------|--------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|----|-------------------------------|--------------------------|--------------------------------|------------------------------------|---|
| GEN.          | MANUFACTURER :                                                                                                                 |                                                                                               | *  |                               | 25                       | HOUSING :DIE CAST ALUMINIUM    | ✓                                  |   |
|               | MODEL NO. :                                                                                                                    |                                                                                               | *  |                               | 26                       |                                |                                    |   |
| FEATURES      | 1                                                                                                                              | TYPE : INDICATING <input type="checkbox"/> NON-INDICATING <input checked="" type="checkbox"/> | ✓  | MATERIAL                      | 27                       | MOVEMENT :SS 304               | ✓                                  |   |
|               | 2                                                                                                                              | SENSING ELEMENT: BOURDON                                                                      | ✓  |                               | 28                       | PRESSURE ELEMENT : SS 304      | ✓                                  |   |
|               | 3                                                                                                                              | MOUNTING : FIELD <input checked="" type="checkbox"/> PANEL/RACK <input type="checkbox"/>      | ✓  |                               | 29                       | SOCKET : SS 304                | ✓                                  |   |
|               | 4                                                                                                                              | SWITCH TYPE : MICROSWITCH                                                                     | ✓  |                               | 30                       | GLASS :                        | ✗                                  |   |
|               | 5                                                                                                                              | SWITCH DIFF.: ADJUSTABLE                                                                      | ✓  |                               | 31                       | DIAPH SEAL/BODY :              | ✗                                  |   |
|               | 6                                                                                                                              | SET PRESSURE : EXT. TAMPERPROOF ADJ.                                                          | ✓  |                               | 32                       | CAPILLARY AND ARMOUR :         | ✗                                  |   |
|               | 7                                                                                                                              | OVERRANGE PROTECTION :1.5 TIMES MAX. PR.                                                      | ✓  |                               | 33                       |                                |                                    |   |
|               | 8                                                                                                                              | SCALE : REQ.                                                                                  | ✓  |                               | 34                       |                                |                                    |   |
|               | 9                                                                                                                              | ACCURACY : $\pm$ 1% OF SPAN                                                                   | ✓  |                               | 35                       |                                |                                    |   |
|               | 10                                                                                                                             |                                                                                               |    |                               | CONNECTIONS & DIMENSIONS | 36                             | PROCESS : 1/2" NPT (M)             | ✓ |
| 11            |                                                                                                                                |                                                                                               | 37 | AIR CONN. (RECEIVER TYPE) :   |                          | ✗                              |                                    |   |
| 12            |                                                                                                                                |                                                                                               | 38 | LOCATION : BOTTOM             |                          | ✓                              |                                    |   |
| 13            |                                                                                                                                |                                                                                               | 39 | CONDUIT : 1/2" NPT (F)        |                          | ✓                              |                                    |   |
| ENCLOSURE     | 14                                                                                                                             | CASE : IP 67 AS PER IS 13947                                                                  | ✓  | 40                            |                          | CHEMICAL DIAPHRAGM PROCESS     |                                    |   |
|               | 15                                                                                                                             | CASE COLOUR : GREY <input type="checkbox"/> BLACK <input checked="" type="checkbox"/>         | ✓  | 41                            |                          | CONNECTION :                   | ✗                                  |   |
|               | 16                                                                                                                             |                                                                                               |    | 42                            |                          | CAPILLARY :                    | ✗                                  |   |
|               | 17                                                                                                                             |                                                                                               |    | 43                            |                          |                                |                                    |   |
| SUPPLY/SIGNAL | 18                                                                                                                             | INPUT SIGNAL : PROCESS <input checked="" type="checkbox"/>                                    | ✓  | ACCESSORIES<br>( REF NOTE 4 ) |                          | 44                             | NAME PLATE /METAL TAG :REQUIRED,SS | ✓ |
|               | 19                                                                                                                             | SWTCH CONTACTS :SPDT                                                                          | ✓  |                               |                          | 45                             | MOUNTING BRACKET :                 | ✗ |
|               | 20                                                                                                                             | SWTCH RATING :NOTE-6                                                                          | *  |                               | 46                       | SYPHON :                       | ✗                                  |   |
|               | 21                                                                                                                             |                                                                                               |    |                               | 47                       | BLOCK & BLEED VALVE : REQUIRED | ✓                                  |   |
|               | 22                                                                                                                             |                                                                                               |    |                               | 48                       | CHEMICAL DIAPHRAGM :           | ✗                                  |   |
|               | 23                                                                                                                             |                                                                                               |    |                               | 49                       | ARMOURED CAPILLARY :           | ✗                                  |   |
|               | 24                                                                                                                             |                                                                                               |    |                               | 50                       |                                |                                    |   |
| DOES & STD.   | 51                                                                                                                             |                                                                                               |    |                               |                          | ✓                              |                                    |   |
|               | 52                                                                                                                             |                                                                                               |    |                               |                          |                                |                                    |   |
|               | 53                                                                                                                             |                                                                                               |    |                               |                          |                                |                                    |   |
| SPARES        | 54                                                                                                                             |                                                                                               |    |                               |                          |                                |                                    |   |
|               | 55                                                                                                                             |                                                                                               |    |                               |                          |                                |                                    |   |
|               | 56                                                                                                                             |                                                                                               |    |                               |                          |                                |                                    |   |
| TESTS         | 57                                                                                                                             | CALIBRATION TEST / HYDRO TEST / CONTACT RATING TEST / ACCURACY TEST / REPEATABILITY           | ✓  |                               |                          |                                |                                    |   |
|               | 58                                                                                                                             |                                                                                               |    |                               |                          |                                |                                    |   |
|               | 59                                                                                                                             |                                                                                               |    |                               |                          |                                |                                    |   |
| DWG.          | 60                                                                                                                             | VENDOR TO SUBMIT ALL TEST CERTIFICATES FOR CONSULTANT / PURCHASER'S REVIEW AND RECORDS        | ✓  |                               |                          |                                |                                    |   |
|               | 61                                                                                                                             | VENDOR TO SUBMIT DATA SHEET, CONTACT DEVELOPMENT WITH TERMINAL DETAILS,                       | ✓  |                               |                          |                                |                                    |   |
|               | 62                                                                                                                             | DRAWINGS AND MANUALS FOR THE EQUIPMENT FOR APPROVAL                                           | ✓  |                               |                          |                                |                                    |   |
| NOTES         | 1. BIDDER TO SUBMIT LIST OF INSTALLATIONS AND COMMISSIONS FOR THE MAKE & TYPE OF INSTRUMENT OFFERED AND USER'S CERTIFICATE     |                                                                                               |    |                               |                          |                                |                                    |   |
|               | 2. * BIDDER TO STATE                                                                                                           |                                                                                               |    |                               |                          |                                |                                    |   |
|               | 3. VOID                                                                                                                        |                                                                                               |    |                               |                          |                                |                                    |   |
|               | 4. ALL ACCESSORIES SHALL BE SUPPLIED UNLESS OTHERWISE AS SPECIFICALLY BROUGHT OUT IN BILL OF MATERIAL IN THE FOLLOW UP SHEETS. |                                                                                               |    |                               |                          |                                |                                    |   |
|               | 5. VENDOR TO PROVIDE SNUBBERS FOR ALL SERVICES WHERE PULSATIONS ARE ENCOUNTERED.                                               |                                                                                               |    |                               |                          |                                |                                    |   |
|               | 6. RATING SHALL BE SUITABLE TO THE CIRCUIT VOLTAGE LEVEL IN WHICH IT IS WIRED.                                                 |                                                                                               |    |                               |                          |                                |                                    |   |

## DATASHEET : PRESSURE RELIEF VALVE





|               |                                                                                                                              |                                                                                           |   |                          |    |                                                                                             |   |
|---------------|------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|---|--------------------------|----|---------------------------------------------------------------------------------------------|---|
| GEN.          | MANUFACTURER :                                                                                                               |                                                                                           | * |                          | 25 | HOUSING : DIE CAST ALUMINIUM                                                                | ✓ |
|               | MODEL NO. :                                                                                                                  |                                                                                           | * |                          | 26 |                                                                                             |   |
| FEATURE       | 1                                                                                                                            | TYPE :NON-INDICATING                                                                      | ✓ | MATERIAL                 | 27 | SOCKET : SS 304                                                                             | ✓ |
|               | 2                                                                                                                            | MOUNTING :FIELD                                                                           | ✓ |                          | 28 | MOVEMENT : SS 304                                                                           | ✓ |
|               | 3                                                                                                                            | THERMOWELL WITH HEX. HEAD : SEE NOTE 3                                                    | ✓ |                          | 29 | THERMOWELL : SS 304                                                                         | ✓ |
|               | 4                                                                                                                            | CONSTRUCTION :TAPERED                                                                     | ✓ |                          | 30 | CAPILLARY :                                                                                 | ✗ |
|               | 5                                                                                                                            | ACCURACY : $\pm 2^{\circ}\text{C}$                                                        | ✓ |                          | 31 | GASKET : CAF                                                                                | ✓ |
|               | 6                                                                                                                            | SCALE : REQD.                                                                             | ✓ |                          | 32 | GLASS :                                                                                     | ✗ |
|               | 7                                                                                                                            | SWITCH TYPE : MICROSWTCH                                                                  | ✓ |                          | 33 | BULB :                                                                                      | ✗ |
|               | 8                                                                                                                            | SWITCH DIFF. : ADJUSTABLE                                                                 | ✓ |                          | 34 |                                                                                             |   |
|               | 9                                                                                                                            | SET PRESSURE : EXTERNAL TAMPERPROOF ADJ.                                                  | ✓ |                          | 35 |                                                                                             |   |
|               | 10                                                                                                                           | OVER RANGE PROTECTION : 150% OF SPAN                                                      | ✓ | CONNECTIONS & DIMENSIONS | 36 | THERMOWELL PROCESS CONN : 1 1/2" FLANGED                                                    | ✓ |
|               | 11                                                                                                                           | AMBIENT TEMP. COMPENSATION : REQD.                                                        | ✓ |                          | 37 | TYPE : SCREWED(M33x2) <input type="checkbox"/> SW <input type="checkbox"/> FLANGED          |   |
|               | 12                                                                                                                           | ACTUATING ELEMENT : BIMETALLIC                                                            | ✓ |                          | 38 | FLANGE : RF ANSI 150 CLASS <input checked="" type="checkbox"/> 300 <input type="checkbox"/> | ✓ |
|               | 13                                                                                                                           |                                                                                           |   |                          | 39 | BULB CONN. : CONDUIT CONN.:1/2" NPT(F)                                                      | ✓ |
| ENCLOSURE     | 14                                                                                                                           | HOUSING : IP 67 AS PER IS 13947                                                           | ✓ |                          | 40 | BULB FITTING :                                                                              | ✗ |
|               | 15                                                                                                                           | HOUSING COLOUR : GREY <input type="checkbox"/> BLACK <input checked="" type="checkbox"/>  | ✓ |                          | 41 | BULB DIA. TO MATCH BORE OF TW                                                               | ✗ |
|               | 16                                                                                                                           |                                                                                           |   |                          | 42 | LOCATION : BACK <input type="checkbox"/> BOTTOM <input checked="" type="checkbox"/>         | ✓ |
|               | 17                                                                                                                           |                                                                                           |   |                          | 43 | CAPILLARY LENGTH :                                                                          | ✗ |
| SUPPLY/SIGNAL | 18                                                                                                                           | SWITCH CONTACTS : SPDT                                                                    | ✓ | ACCESSORIES              | 44 | NAME PLATE : REQUIRED                                                                       | ✓ |
|               | 19                                                                                                                           | SWTCH RATING :                                                                            | * |                          | 45 | MOUNTING BRACKET :                                                                          | ✗ |
|               | 20                                                                                                                           |                                                                                           |   |                          | 46 | METAL TAG : SS                                                                              | ✓ |
|               | 21                                                                                                                           |                                                                                           |   |                          | 47 |                                                                                             |   |
|               | 22                                                                                                                           |                                                                                           |   |                          | 48 |                                                                                             |   |
|               | 23                                                                                                                           |                                                                                           |   |                          | 49 |                                                                                             |   |
|               | 24                                                                                                                           |                                                                                           |   |                          | 50 |                                                                                             |   |
| CODES & STD.  | 51                                                                                                                           | ASME PTC 19.3, HEAD:                                                                      |   |                          |    |                                                                                             | ✓ |
|               | 52                                                                                                                           | IS 13947                                                                                  |   |                          |    |                                                                                             | ✓ |
|               | 53                                                                                                                           |                                                                                           |   |                          |    |                                                                                             |   |
| SPARES        | 54                                                                                                                           |                                                                                           |   |                          |    |                                                                                             |   |
|               | 55                                                                                                                           |                                                                                           |   |                          |    |                                                                                             |   |
|               | 56                                                                                                                           |                                                                                           |   |                          |    |                                                                                             |   |
|               | 57                                                                                                                           |                                                                                           |   |                          |    |                                                                                             |   |
| TESTS         | 58                                                                                                                           | CALIBRATION / MATERIAL TEST / ACCURACY TEST / BORE CONCENTRICITY : $\pm 5\%$ OF WALL THK. |   |                          |    |                                                                                             | ✓ |
|               | 59                                                                                                                           | HYDROSTATIC TEST FOR TW 1.5 TIMES MAX. PR./CONTACT RATING TEST                            |   |                          |    |                                                                                             | ✓ |
|               | 60                                                                                                                           | VENDOR TO SUBMIT ALL TEST CERTIFICATES FOR CONSULTANT/PURCHASER'S REVIEW & RECORD         |   |                          |    |                                                                                             | ✓ |
|               | 61                                                                                                                           | IBR CERTIFICATES                                                                          |   |                          |    |                                                                                             | ✗ |
| DWG.          | 62                                                                                                                           | VENDOR TO SUBMIT DATA SHEETS, DRAWNGS AND MANUALS FOR THE EQUIPMENT FOR APPROVAL          |   |                          |    |                                                                                             | ✓ |
|               | 63                                                                                                                           | VENDOR TO SUBMIT CALCULATIONS FOR IMMERSION LENGTHS FOR APPROVAL                          |   |                          |    |                                                                                             | ✓ |
| NOTES         | 1. BIDDER TO SUBMIT LIST OF INSTALLATIONS AND COMMISSIONS FOR THE MAKE & TYPE OF INSTRUMENT OFFERED AND USERS' CERTIFICATES. |                                                                                           |   |                          |    |                                                                                             |   |
|               | 2. * BIDDER TO STATE                                                                                                         |                                                                                           |   |                          |    |                                                                                             |   |
|               | 3. BAR STOCK ASSEMBLY.                                                                                                       |                                                                                           |   |                          |    |                                                                                             |   |
|               | 4. VOID                                                                                                                      |                                                                                           |   |                          |    |                                                                                             |   |
|               | 5. RATING SHALL BE SUITABLE TO THE CIRCUIT VOLTAGE LEVEL IN WHICH IT IS WIRED.                                               |                                                                                           |   |                          |    |                                                                                             |   |
|               |                                                                                                                              |                                                                                           |   |                          |    |                                                                                             |   |
|               |                                                                                                                              |                                                                                           |   |                          |    |                                                                                             |   |

## DATASHEET : PRESSURE TRANSMITTER

|     |                |   |
|-----|----------------|---|
| 62. | MANUFACTURER : | * |
|-----|----------------|---|

|     |                                                                                                                                                                                                                        |   |
|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| 63. | MODEL NO.:                                                                                                                                                                                                             | * |
| 64. | <b><u>FEATURES:</u></b>                                                                                                                                                                                                |   |
| 65. | TYPE: INDICATING <input checked="" type="checkbox"/> SMART TYPE <input type="checkbox"/>                                                                                                                               |   |
| 66. | ELECTRIC (TWO WIRE) <input checked="" type="checkbox"/>                                                                                                                                                                |   |
| 67. | MOUNTING : FIELD <input checked="" type="checkbox"/> RACK <input type="checkbox"/>                                                                                                                                     |   |
| 68. | EXTERNAL ZERO AND SPAN ADJ. :REQUIRED                                                                                                                                                                                  |   |
| 69. | ACCURACY : $\pm 0.1\%$ OF SPAN                                                                                                                                                                                         |   |
| 70. | OVER RANGE PROTECTION : 130% OF SPAN                                                                                                                                                                                   |   |
| 71. | LOCAL DISPLAY : LCD REQUIRED.                                                                                                                                                                                          |   |
| 72. | QUANTITY: 3 Nos                                                                                                                                                                                                        |   |
| 73. | TAG NOS.: LATER                                                                                                                                                                                                        |   |
| 74. | SERVICE: AIR                                                                                                                                                                                                           |   |
| 75. | <b>ENCLOSURE PROTECTION</b>                                                                                                                                                                                            |   |
| 76. | CASE : EX PROOF ZONE __ GR._____                                                                                                                                                                                       |   |
| 77. | WEATHER PROTECTION: IP 65 AS PER IS 13947                                                                                                                                                                              |   |
| 78. | CASE COLOUR : GREY <input type="checkbox"/> BLACK <input type="checkbox"/>                                                                                                                                             | * |
| 79. | <b>POWER SUPPLY / SIGNAL:</b>                                                                                                                                                                                          |   |
| 80. | OUTPUR SIGNAL: 4 TO 20 mA                                                                                                                                                                                              |   |
| 81. | POWER SUPPLY: 230 VAC / 24 V DC                                                                                                                                                                                        | * |
| 82. | HART COMMUNICATION PROTOCOL: NOT REQUIRED                                                                                                                                                                              |   |
| 83. |                                                                                                                                                                                                                        |   |
| 84. | <b>MATERIAL OF CONSTRUCTION</b>                                                                                                                                                                                        |   |
| 85. | HOUSING: DIE CAST ALUMINIUM <input checked="" type="checkbox"/><br>SS 316 <input type="checkbox"/>                                                                                                                     |   |
| 86. | SENSING ELEMENT : SS 316                                                                                                                                                                                               |   |
| 87. | BODY: ALUMINIUM ALLOY                                                                                                                                                                                                  |   |
| 88. | CAPILLARY AND ARMOUR: NOT REQUIRED                                                                                                                                                                                     |   |
| 89. | SYPHON:                                                                                                                                                                                                                |   |
| 90. | <b>CONNECTION &amp; DIMENSIONS</b>                                                                                                                                                                                     |   |
| 91. | PROCESS CONNECTION: THREADED <input checked="" type="checkbox"/><br>FLANGED <input type="checkbox"/>                                                                                                                   |   |
| 92. | THREADED PROCESS CONNECTION:<br>$\frac{1}{2}$ "NPT (M) <input checked="" type="checkbox"/> $\frac{1}{4}$ "NPT (M) <input type="checkbox"/><br>1" NPT(M) <input type="checkbox"/> 3/8 INCH BSP <input type="checkbox"/> |   |
| 93. | FLANGED PROCESS CONNECTION:<br>FLANGE RATING :<br>FLANGE SIZE :                                                                                                                                                        |   |
| 94. | PROCESS CONNECTION LOCATION:                                                                                                                                                                                           |   |

|      |                                                                                                                      |  |
|------|----------------------------------------------------------------------------------------------------------------------|--|
|      | BOTTOM <input checked="" type="checkbox"/> BACK <input type="checkbox"/>                                             |  |
| 95.  | CABLE ENTRY: ½" NPT (F) <input checked="" type="checkbox"/>                                                          |  |
| 96.  | <b>ACCESSORIES (REFER NOTE 3)</b>                                                                                    |  |
| 97.  | NAME PLATE / METAL TAG : REQUIRED, SS                                                                                |  |
| 98.  | MOUNTING BRACKET: REQUIRED                                                                                           |  |
| 99.  | CAPILLARY :NA                                                                                                        |  |
| 100. | CABLE GRAND : REQUIRED                                                                                               |  |
| 101. | CHEMICAL SEAL :NA                                                                                                    |  |
| 102. | ALL INSTALLATION HARDWARE: REQUIRED                                                                                  |  |
| 103. | SYPHON: NA                                                                                                           |  |
| 104. | ISOLATION & DRAIN VALVES : REQUIRED                                                                                  |  |
| 105. | <b>CODES AND STANDARDS (REFER NOTE 2)</b>                                                                            |  |
| 106. | WEATHER PROOF – IS 13947 PART I                                                                                      |  |
| 107. | EXPL. PROOF–IS 2148/ BS EN 50014/ BS EN 50020                                                                        |  |
| 108. |                                                                                                                      |  |
| 109. | <b><u>TESTS :</u></b>                                                                                                |  |
| 110. | CALIBRATION : REQUIRED                                                                                               |  |
| 111. | HYDRO TEST : REQUIRED                                                                                                |  |
| 112. | LEAK TEST: REQUIRED                                                                                                  |  |
| 113. | OVER RANGE TEST: REQUIRED                                                                                            |  |
| 114. | REPEATABILITY: REQUIRED                                                                                              |  |
|      |                                                                                                                      |  |
|      | <b>DRAWINGS / DOCUMENTS</b>                                                                                          |  |
| 1.   | THE VENDOR SHALL SUBMIT CATALOGUES, DATA SHEET AND ERECTION SKETCH FOR REVIEW AND COMMENTS BY PURCHASER/ CONSULTANT. |  |
| 2.   | THE VENDOR SHALL SUBMIT INSTRUCTION MANUAL FOR RECORDS.                                                              |  |
|      |                                                                                                                      |  |
|      | <b><u>TEST CERTIFICATES</u></b>                                                                                      |  |
| 1.   | VENDOR SHALL SUBMIT ALL ROUTINE TEST CERTIFICATES FOR PURCHASER/CONSULTANT'S REVIEW.                                 |  |
| 2.   | VENDOR SHALL SUBMIT TYPE TEST CERTIFICATES FOR PROTECTION CLASS.                                                     |  |
|      | <b><u>Notes :</u></b>                                                                                                |  |
|      | 1.0 * CONTRACTOR TO FURNISH DETAILS                                                                                  |  |
|      | 2.0 THE CONTRACTOR SHALL INDICATE ALL APPLICABLE CODES AND STANDARDS.                                                |  |
|      | 3.0 ALL ACCESSORIES SHALL BE SUPPLIED AS APPLICABLE.                                                                 |  |

**TECHNICAL SPECIFICATION**  
**ELECTRICAL WORKS**

## **ELECTRICAL WORK**

### **7.1 INTRODUCTION – ELECTRICAL**

- 7.1.1 Followings CPWD Specification for Electrical shall take precedence over provisions of relevant I.S. Codes.
- CPWD specification for electrical works part I internal 2013
  - CPWD general specifications for electrical works - part ii (external) 1994
  - CPWD general specifications for electrical works part-iv substation 2013
- 7.1.2 All Electrical works shall be carried out in accordance with the provisions of National Electrical Code 2011 and Central Electricity Authority 2010.
- 7.1.3 Refer following Detailed Technical specifications for items which are not covered in above mentioned CPWD Specifications. This specification is to be read along with SLDs and BOQs. In case of any conflict in specification, BOQ spec/ description will be followed.

### **7.2 LOW VOLTAGE SWITCHGEAR**

#### **7.2.1 Scope**

This Section covers the detailed requirements of medium voltage switch Panel for 433V, 3 phase 50 Hz 4 wire system. These shall be branded and/or assembled/fabricated from a factory of repute. All switchgears shall be fully rated at an ambient of 45° C.

##### Type of Panel

The medium voltage switch board panel shall comprise of any one of the following types of switchgears or combination thereof as specified.

Air Circuit breakers draw out or fixed type, Switch Disconnecter Fuse Units fixed type, MCCBs of suitable Ics ratings. MCCBs shall invariably be Current Limiting type. Features like Double Break, Positive Isolation functions shall be preferred.

The Panel shall be indoor type having incoming sectionalization and outgoing switchgears as specified. The design shall be cubical type. The degree of enclosure protection shall be IP 42 as per IS: 13947 (Part-I).

#### **7.2.2 LT Panel**

##### **7.2.2.1 General Construction**

- a) The switchboard shall be floor mounted free standing totally enclosed and extensible type of uniform height not more than 2400mm. The switch board shall be dust & vermin proof and shall be suitable for the climate conditions as specified. The design shall include all provisions for safety of operation and maintenance personnel. The general construction shall conform to IS: 8623/1993 for factory assembled switch board.

- b) LT Panels shall be provided with a metal sill frame made of structural steel channel section properly drilled for mounting the Switchgear along with necessary mounting hardware. Hardware shall be zinc plated and passivated, Provided with cable entry facilities at top/bottom as per layout requirement with 3mm thick removable gland plates on breaker panels and 2 mm thick removable gland plates on other panels with necessary cable glands. For 1-core cables, these plates shall be non-magnetic.
- c) Switchgear shall be provided with gaskets all round the perimeter of adjacent panels, panel and base frame, removable covers and doors,
- d) Provided with busbars running at the top, as required, all along the length of the switchgear in a separate sheet steel enclosure.

#### 7.2.2.2 Cubical Type Panels

Cubical type panels shall be fabricated out of sheet steel not less than 2.0 mm thick. Wherever necessary, such sheet steel members shall be stiffened by angle iron frame work. General construction shall employ the principle of compartmentalization and segregation for each circuit. Unless otherwise approved, incomer and bus section panels or sections shall be separate and independent and shall not be mixed with sections required for feeders. Each section of the rear accessible type panel shall have hinged access doors at the rear. Overall height of the panel shall not exceed 2.4 meters. Operating levers, handle etc. of highest unit shall not be higher than 1.7 meters. Multi-tier mounting of feeder is permissible. The general arrangement for multi tier construction shall be such that the horizontal tiers formed present a pleasing and aesthetic look. The general arrangement shall be approved before fabrication. Cable entries for various feeders shall be either from top or bottom. Through cable alleys located in between two circuit sections ,either in the rear or in the front of the panel. All cable terminations shall be through gland plates. There shall be separate gland plate for each cable entry so that there will not be dislocation of already wired circuits when new feeders are added. Cable entry plates shall therefore be sectionalized. The construction shall include necessary cable supports for clamping the cable in the cable alley or rear cable chamber.

Cubicle panels with more than 1000 Amps BUS shall be made of tested structural modular sections.

#### 7.2.2.3 Bus Bar and Connections

The bus bars shall be of Copper/Aluminum of high conductivity electrolytic quality and of adequate section. Current density shall not exceed 130 amps for Copper /sq. cm. The bus bar system may comprise of a system of main horizontal bus bars and ancillary vertical bus bars run in bus bar alleys on either side of which the circuit could be arranged with front access cable entries. In the case of rear access, horizontal bus system shall run suitably either at the top or bottom. All connections to individual circuits from the bus bar shall preferably be solid connections; however flexible connections shall also be permitted as per recommendations of the Panel Manufacturer. All bus bars and connections shall be suitably sleeved / insulated with heat shrinkable PVC with approved manner.

The insulation shall be non-inflammable and self-extinguishing and in fast colours to indicate phases. The joints shall be insulated in such a way as to provide for

accessibility of contact bolts for maintenance. Joints shall be covered with removable moulded shrouds made out of fibreglass-reinforced polyester.

#### 7.2.2.4 Incomer I Termination

Incomer termination shall be suitable for receiving bus trunking /underground cables. Cable terminations shall invariably be through terminal blocks (Polyamide or superior) or brought out solid terminals.

#### 7.2.2.5 Instruments

All voltmeters and ammeters shall be flush mounted of size minimum 96 mm conforming to class 1,5 of IS: 1248 for accuracy. All voltmeters shall be protected with MCB. They shall be suitable for semi-flush with only flanges projecting on vertical panels.

#### 7.2.2.6 Indicating Lamps

On all the incomers of M.V panels, ON/OFF indicating LED lamps shall be provided and shall be suitable for operation on AC supply. Phase indicating LED lamps shall be associated with necessary ON/OFF toggle switch.

#### 7.2.2.7 Small Wiring

All small wiring for Controls, Indication etc, shall be of with suitable FRLS/HFFR (halogen free fire retardant) copper conductor cables. Wiring shall be suitably protected within switch board. Runs of wires shall be neatly bunched, suitably supported and clamped. Means shall be provided for easy identifications of the wires. Where wires are drawn through steel conduits, the works shall conform to CPWD General Specifications for Electrical works (Part I- Internal) - 2005 and IS:732 as the case may be. Identification ferrules shall be used at both ends of the wires. All control wiring meant for external connections are to be brought out of terminal board.

#### 7.2.2.8 Operational Requirements

The indoor type LT panel shall conform to the following: -

The panel shall comprise of incomers, outgoing feeders and bus coupler as specified. The incomer shall be either a double break / contact repulsion MCCB or an Air Circuit Breaker. The bus coupler shall be either a circuit breaker or a double break / contact repulsion MCCB, ACB, switch disconnector fuse unit as specified. The outgoing feeders shall be circuit breakers/MCCBs as specified.

Bus bars for phase and neutral shall have a rating as specified in SLD and BOQ.

The entire switch panel shall be cubical type generally conforming to 18:8623/1993 for factory assembled switch board.

The incomer panel shall be suitable for receiving bus trunking or LT cable of size specified either from top or from bottom.

All incoming AIRCIRCUIT BREAKER/MCCB shall have suitable adjustable tripping current and the time delay settings.

The entire panel shall have a common earth bar of size as specified with two terminals for earth connections.

#### 7.2.2.9 Rating and Requirements



### **Air Circuit Breaker\***

All Air Circuit Breakers shall be 3/4 pole with minimum 50 KA breaking capacity (35 MVA at 433V) conforming to IS: 13947 (Part-II). Rated current shall be as per capacities specified. The equipment shall be complete with the following: -

- a) Necessary circuit breaker carriage with 3 position (isolate, test, service) draw-out mechanism.
- b) Necessary isolating plugs and sockets.
- c) Necessary mechanism interlock and automatic safe shutters gear with arrangement for pad locking.
- d) Necessary independent manual spring mechanism with mechanical On/Off indication as well as electrical On/Off indication,
- e) Necessary bus bars with bolted type neutral links.
- f) ACB shall be provided with microprocessor based releases having built in over load, short circuit & earth fault protection. Microprocessor release shall be EMI (electro magnetic induction)/EMC(electro magnetic compatible) certified.
- g) Necessary set of auxiliary switches.
- h) Necessary set of CTs with ratios as specified.
- i) Necessary identification, metering requirements as specified i/c. ON/OFF indication lamps, selector switches, fuses, ammeter, voltmeter etc.
- j) In case of 4 pole breaker neutral shall be fully rated with adjustable settings from 50% to 100% of In.
- k) ACB terminals shall be suitable/suitably brought out for direct aluminum termination as per IS 13947 Part-II.
- l) Provided with 'red', 'green' and 'amber' indicating lamps to indicate 'closed' 'open' and 'auto-trip' conditions of the circuit breaker when breaker operation is controlled by a control switch.
- m) All indicating lamps shall be clustered LED type, with in-built short circuit, surge protections etc. Adequate number of contacts shall be provided to have remote annunciation of the breaker feeders:

Breaker 'ON'

Breaker 'OFF'

Breaker 'TRIP'

Breaker 'Service'

Breaker 'Test'

**Note:** Wherever fixed type circuit breakers are required, it shall be clearly specified.

### **MCCB/ MCB etc:**

MCCBs : All MCCBs shall be current limiting type with features of load line reversibility and suitable for Horizontal/Vertical mounting without any derating.

Beyond 300 Amps capacity MCCBs shall have positive isolation and preferably double break / contact repulsion & double insulation features. The MCCBs shall invariably be used with terminal spreaders.

- a) The MCCBs shall conform to the latest applicable standards (IS: 13947).
- b) MCCBs in AC circuits shall be of TP/TPN/FP construction arranged for simultaneous manual closing and opening. Operating mechanism shall be quick-make, quick-break and trip-free type. The ON, OFF and TRIP positions of the MCCB shall be clearly indicated and visible to the operator. Operating handle for operating MCCBs from door of board shall be provided.
- c) The instantaneous short circuit release shall be so chosen by the CONTRACTOR as to operate at a current in excess of the peak motor inrush current and a range of settings shall be provided for the EMPLOYER 'S / ENGINEER'S selection.
- d) MCCB terminals shall be shrouded and designed to receive cable lugs for cable sizes relevant to circuit ratings.
- e) Minimum no. of additional auxiliary contacts (for purchaser's use) shall be provided.
- f) MCCBs shall incorporate time delay devices to ensure that it will tolerate harmless transient overload unless this is well in excess of 25% of its rated value for a sustained period.

**MCBs:** Miniature circuit breakers for use on motor space heater control circuits shall comply with the requirements of applicable standards, unless otherwise mentioned in Data Sheet.

**CONTACTORS:** Motor starter contactor shall be of the electromagnetic type rated for uninterrupted duty as defined in applicable standards.

Main contacts of motor-starter contactors shall be of silver plated copper.

Contactors shall be of the double break, non-gravity type.

**Direct-on-Line Starters/Star Delta Starters :** Starters shall be suitable for Class AC 3 utilisation category as specified in applicable standards.

### 7.2.3 Lightning and Surge Voltage Protection

#### 7.2.3.1 Scope

This specification describes the electrical and mechanical requirements for a high energy Transient Voltage Surge Suppressor (TVSS). The specified TVSS/SPD system shall be connected in parallel to the facility's electrical all main incoming panels. It shall provide effective high energy surge current diversion, and shall be suitable for application in ANSI/IEEE C62.41 Category A, B and C environments or IEC 61643-1 Class I, II and III

#### 7.2.3.2 Codes & Standards

The specified system shall be designed, manufactured, tested and installed in compliance with the following codes and standards:

IEC 61643-1: Surge Protective Devices connected to low voltage power distribution systems.

Underwriters Laboratories: (UL 1449, 2nd edition) Standard for Transient Voltage Surge Suppressors. International Standards Organization (ISO) Company certified ISO9001 for manufacturing, design and service and the applicable portions of the American National Standards Institute and Institute of Electrical and Electronic Engineers standards (ANSI/IEEE 1100 ,C62.11, C62.41, C62.45)

#### 7.2.3.3 Electrical Requirements

##### a) Nominal system operating voltage

The single phase TVSS system shall be suitable for installations operating between 220VAC and 240VAC.

The three phase TVSS system shall be suitable for installations operating between 380VAC to 415VAC, Star (Y) Configuration: 3 Phase 4 Wire Plus Ground or Delta Configuration: 3 phase 4 wire including Ground.

##### b) Maximum Continuous Operating Voltage (MCOV):

The maximum continuous operating voltage of the complete TVSS, as well as all components in the suppression path shall be greater than 125% of the nominal system operating voltage to ensure the ability of the system to withstand temporary RMS over voltages (swell conditions).

##### c) Operation Frequency:

The operating frequency range of the system shall be 50 or 60 Hz.

##### d) Protection Modes:

Note: L = Line, G = Ground, N = Neutral

The SPD shall provide protection in all modes (L-N or L-L, L-G and N-G where applicable)

#### 7.2.3.4 Surge Current Capacity:

| Location                  | Class   | Surge Current |
|---------------------------|---------|---------------|
| Main Service Entrance     | Class C | 200/400 KA    |
| Main Distribution Feeders | Class B | 100/160 KA    |
| Sub distribution Panels   | Class A | 50 KA         |

#### 7.2.3.5 Short-circuit Withstand Capability:

The TVSS shall be able to carry the power short circuit current until it is interrupted by external over-current disconnect or by the backup over current protection. The minimum Short Circuit Withstand of the TVSS shall be according to the table below:

| Class | Minimum Short Circuit Withstand Capability |
|-------|--------------------------------------------|
|-------|--------------------------------------------|

|         |            |
|---------|------------|
| Class C | 200KA      |
| Class B | 35 to 65KA |
| Class A | 14KA       |

#### 7.2.3.6 Over current Protection (fusing)

All components, including suppression, filtering, and monitoring components, shall be individually fused at the component level with the fuses rated so as not to impede maximum specified surge current capacity. The fuse shall be capable of opening in less than one millisecond and clear both high and low impedance faults.

#### 7.2.3.7 Clamping Voltage:

The TVSS shall be able to clamp the voltage:

| System Voltage                    | Max Let Through Voltage |
|-----------------------------------|-------------------------|
| 120, 120/208 or 120/240           | 400 volts               |
| 208, 240, 277, 230/400 or 277/480 | 800 volts               |
| 346, or 346/600                   | 1200 volts              |
| 480                               | 1500 volts              |
| 600                               | 2000 volts              |

#### 7.2.3.8 Response Time:

Typical response time of all suppression components shall be <0.5 ns.

#### 7.2.3.9 Noise Attenuation

The filter shall provide insertion loss with a maximum of 40dB to 50dB from 10 kHz to 100 MHz with data obtained utilizing the 50 ohm Insertion Loss Methodology from MIL-STD-220A.

#### 7.2.3.10 Environmental Requirements

Operating Temperature : - 40<sup>0</sup> C to +85<sup>0</sup> C (-40<sup>0</sup> to +187<sup>0</sup> F)

Relative humidity : - 0% to 95%

Audible Noise:- The unit shall not generate any appreciable noise. 40 DB for RFI and EMI noise attenuation

Operating Altitude: 0 to 14,000 feet above sea level.

Magnetic Fields: The unit shall not generate any appreciable magnetic fields and shall be suitable for use directly inside computer rooms.

Connection type- Parallel

Protection lvl in kV – based on level of protection

Status indication – LED type dry contacts

#### 7.2.3.11 Instruments & Relays

##### a) Indicating instruments

All electrical indicating instruments will be 96 mm square, with 240-degree scale (Taut band type). They shall be suitable for semi-flush with only flanges projecting on vertical panels.

Instruments shall have accuracy class of 1.0 or better. The design of the scales shall be such that it can read to a resolution corresponding to 50% of the accuracy class index. KWH meter mentioned in the SLDs shall have pulse output to be integrated with the BAS system and an accuracy class of 1.

##### b) Protective relays

Protective relays shall conform to standard requirements. Type of relays either static or electro-mechanical which meet the various performance requirements are considered acceptable.

All static relays shall be adequately protected against external voltage surges and noise signals. In addition to this, all the input circuit of static relays will include their own auxiliary current and voltage transformers with screened windings. Where auxiliary interposing transformers are not feasible in the input circuit, relays would have special surge suppression circuits to suppress external noise and surges.

Output elements of all static relays shall consist of electro-mechanical relays only.

Relays shall have at least the following electrically independent output contacts for the following purposes:

- Tripping circuit
- Remote / local annunciation

If the main relay does not have sufficient number of output contacts inherently, these shall be multiplied using auxiliary relays. These auxiliary relays shall be used for annunciation, indication, etc. only. For tripping, only the contact of main relay shall be used directly

##### c) Wiring And Accessories

Cubicles shall be completely wired upto equipment / terminal block. Interpanel and inter-cubicle looping of control and cubicle space heating supplies to be carried out by CONTRACTOR. Wiring to be carried out with 650V grade single core PVC insulated stranded copper conductor of following sizes :

- All circuits except CT circuit :1.5 sq.mm.
- CT circuit :2.5 sq.mm.

Longitudinal troughs extending throughout the full length of the panels to be provided for interpanel wiring, AC-DC supplies, PT circuits, annunciator circuits, etc. Ferrules for wire termination to be provided. Wire connected to trip

circuit will have red coloured ferrule.

#### 7.2.3.12 Terminal Blocks

- a) Terminals blocks for CT and PT secondary leads shall be provided with test links and isolating facilities.
- b) All spare contacts and terminals of the panel mounted equipment and devices shall be wired to terminal blocks. At least 10% spare terminals shall be provided.
- c) Terminal blocks to be suitable for connecting the following conductors of the PURCHASER's cables on each side:

|                                |                                            |
|--------------------------------|--------------------------------------------|
| All circuits except CT circuit | Minimum of two 1.5 mm <sup>2</sup> copper  |
| CT Circuits                    | Minimum of four 2.5 mm <sup>2</sup> copper |

#### 7.2.3.13 Cable Terminations

- a) Power and control cable glands and crimping type lugs shall be supplied to suit the cable sizes.
- b) Glands shall be heavy duty, double compression type made of brass and plated.

#### 7.2.3.14 Control Supply

230/110V AC supply be provided for the switchgear. Suitable control transformer shall be provided to derive 110V AC control supply voltage. All inter panel wiring required shall be included in the scope.

#### 7.2.3.15 Tests To Be Conducted

- a) Functional test, temperature rise test, high voltage test, limits of operation test, insulation test. PURCHASER will have the option to witness the tests at the MANUFACTURER'S work before dispatch.
- b) TENDERER shall furnish the type test certificates along with the Tender. In the absence of the same, the CONTRACTOR shall arrange to carry out the type test without any cost implication to the EMPLOYER.

#### 7.2.3.16 List Of Drawings

The CONTRACTOR shall furnish the following drawings for the switchgear:

- a) Overall outline dimensions and general arrangement including plan, front elevation, rear & side elevations, clearances recommended in front and back.
- b) Switchgear layout plan including floor openings, fixing arrangements and loading details.
- c) Schematic control diagrams to cover controls, protection, interlocks, instruments, space heaters, etc. for each type of module.
- d) Detailed internal wiring diagram of each type of module, including terminal block numbers, ferrule numbers and the external cable connection designations

- e) Item wise bill of material for each module, listing all devices mounted and also otherwise furnished like cable glands, indicating the MANUFACTURER's type, rating, quantity & special notes, if any.
- f) Inter panel interconnection wiring diagram including terminal numbers and ferrule numbers.
- g) Each type of protection relay and circuit breaker release characteristics

NOTES:

- The CONTRACTOR shall be entirely responsible for the correctness of the internal wiring diagrams
- The CONTRACTOR shall ensure that the characteristics of the CTs, fuses, protection relays, VTs and all other devices offered by him are such as to be suitable for the purpose for which they are intended.

#### 7.2.3.17 Test Certificates

Type test certificates of all standard component parts, e.g. contactors, breakers, switches, fuses, relays, CTs, VTs, and for the standard factory built assembly shall be submitted by the CONTRACTOR.

#### 7.2.3.18 Instruction Manuals

The CONTRACTOR shall furnish specified number of copies of the instruction manual which would contain detailed instructions for all operational & maintenance requirement. The manual shall be furnished at the time of dispatch of the equipment and shall include the following aspects:

- a) Outline dimension drawings showing relevant cross-sectional views, earthing details and constructional features.
- b) Rated voltages, current, duty-cycle and all other technical information which may be necessary for correct operation of the switchgear.
- c) Catalogue numbers of all components liable to be replaced during the life of the switchgear.
- d) Storage for prolonged duration.
- e) Unpacking.
- f) Handling at site.
- g) Erection.
- h) Precommissioning tests.
- i) Operating procedures.
- j) Maintenance procedures.
- k) Precautions to be taken during operation and maintenance work.

#### 7.2.3.19 Installation

The installation work shall cover assembly of various sections of the panels lining up, grouting the units etc. In the case of multiple panel switch boards after connecting up the bus bars etc., all joints shall be insulated with necessary insulation tape or

approved insulation compound. A common earth bar as per these specifications shall be run inside at the back of switch panel connecting all the sections for connection to frame earth system. All protection and other small wirings for indication etc. shall be completed before calibration and commissioning checks are commenced. All relays, meters etc. shall be mounted and connected with appropriate wiring.

#### 7.2.3.20 Testing And Commissioning

Commissioning checks and tests shall include all wiring checks and checking up of connections. Relay adjustment/setting shall be done before commissioning in addition to routine Megger tests. Checks and tests shall include the following: -

- a) Operation checks and lubrication of all moving parts.
- b) Interlock function checks.
- c) Continuity checks of wiring, fuses etc. as required.
- d) Insulation test: When measured with 500V Megger the insulation resistance shall not be less than 100 mega ohms.
- e) Trip tests and protection gear test.



### **7.3 POWER FACTOR CORRECTION SYSTEM**

#### **7.3.1 Scope**

Design, manufacture, supply, erection, testing and commissioning of Indoor type power correction capacitor banks for power factor improvement as per specification given below.

#### **7.3.2 Rating**

50 kVAR (or less) capacitor units as specified in the BOQ shall be used to form a bank of capacitors of designed capacity.

#### **7.3.3 Enclosure**

The panel shall be indoor type, free standing, and floor mounting with IP42 degree of protection. It shall be completely made of CRCA sheet steel. The enclosure shall have sturdy support structure with angle supports as necessary and shall be finished with powder coating in the approved colour shade/s to match the colour of the other panels. The thickness of powder coating should be minimum 80 microns.

Suitable provisions shall be made in the panel for proper heat dissipation. Air aspiration louvers for heat dissipation shall be provided as a necessary.

The front portion shall house the switchgear and the rear portion shall house capacitors. The enclosure is to be suitably sized to accommodate all the components, providing necessary air clearance between live and non-live parts, providing necessary working clearance.

#### **7.3.4 APFC Relay / Controller**

Microprocessor based APFC relay (Intelligent VAr controller) shall sense the PF in the system and automatically switch ON / OFF the capacitor unit or stage to achieve the preset target PF. The controller shall have the following features :

- a) Digital settings of parameters like PF, Switching time delay, Step limit etc.
- b) Indication of PF, preset parameters.
- c) Minimum threshold setting of 1% of CT current.
- d) No-volt release.
- e) Protective shut down in case of harmonic overload.
- f) Indication for Failure to achieve the target PF, Harmonic overloading, Step failure etc.
- g) All electricity supplies exceeding 100 A, 3 phase shall maintain their power factor between 0.95 lag and unity at the point of connection.

#### **7.3.5 Capacitor Unit**

Each basic unit of mixed dielectric extra low loss heavy duty capacitor shall be built with a number of elements. These elements shall be combination of capacitor tissue paper and biaxially oriented polypropylene film impregnated with non PCB bio-degradable impregnant or Film Foil capacitor manufactured using Poly propylene film placed between 2 layers of metal foil and winding. The elements shall be connected to the external bus bars through these leads in a series parallel connection to form a three phase unit.

The capacitor units shall be floor mounting type using minimum floor space. The container of capacitors shall be made out of 2 mm thick M S sheet steel of polyester paint coated finish. Each standard unit shall be provided with internal fuses (operation co-ordinated with case-rupture characteristics to avoid rusting).

Total Harmonic Distortion (THD) of upto 5% on voltage and current waveforms shall not affect the life of capacitors.  $\pm 10\%$  variation in line voltage shall not affect the life of the capacitors.

#### 7.3.6 Capacitors

General specifications : 3 phase, delta connected, 50 Hz.

Voltage : Shall be designed for minimum 520V and shall withstand system over voltage, increased voltage due to series reactor and harmonics.

Capacitor type : Super heavy duty with double side metallised capacitor tissue paper. Oil impregnated and self-healing type with bi-axially oriented polypropylene film shall be fitted with pressure sensitive disconnecter in each individual capacitor cell.

Overvoltage +10% (12h / 24h), + 15% (30m / 24h), + 20% (5m), +30% (1m) as per Clause 6.1 of IS 13340-1993.

Over current :  $2.5 \times I_n$

Pak Inrush current withstand :  $350 \times I_n$

Total watt-losses including discharge resistors :  $< 0.45 \text{ W / k V Ar}$ .

Temperature category : -25 deg.C to 70 deg.C.

Capacitor shall be self-heating type and oil impregnated for longer life. The impregnant shall be non-PCB, biodegradable type, must be properly treated and degasified, so as not to have any degeneration properties and shall be non-oxidizing.

The design shall be modular for simple mechanical assembly, no extra accessories / metal parts to be required. Unit must be free standing with an IP 41 protection level.

#### 7.3.7 Discharge Resistance

Capacitors shall be provided with permanently connected discharge resistors so that residual voltage of capacitors is reduced to 50 volts or less within one minute after the capacitors are disconnected from the source of supply.

#### 7.3.8 Terminals

Each capacitor bank shall be provided with a terminal chamber and cable glands suitable for PVC insulated aluminum conductor armoured cables as specified.

#### 7.3.9 Earthing

Two separate earthing terminals shall be provided for earth connection of each bank.

#### 7.3.10 Testing

The reactor shall be tested using a separate source voltage test of 3 KV (coil to core) for one minute as per IEC 76/3. The reactor shall be fitted with a temperature sensitive micro-switch in the centre coil (normally open) for connection to trip circuit in case of high operating temperature.

#### 7.3.11 Switchgear & Protection

Incomer switchgear shall be TP&N breaker appropriate rating (minimum 1.8 times the normal current to take care of inrush switching current). Suitable contactor for each step shall be used and must be capable of capacitor switching duty at each step for short circuit protection.

Busbars shall be suitably colour coded and must be mounted on appropriate insulator supports.

Power cables used shall have superior mechanical, electrical and thermal properties, and shall have the capability to continuously operate at very high temperatures up to 125 deg.C.

Internal wiring between main bus-bars, breaker, contactor and capacitors shall be made with 1100 V grade, PVC insulated, copper conductor cable of appropriate size, by using suitable copper crimping terminal ends etc.

Suitable bus links for input supply cable termination shall be provided.

#### 7.3.12 Control Circuit & General Protection

The control circuit shall be duly protected by using suitable rating MCB.

Wiring of the control circuit shall be done by using 1.5 sq.mm, 1100 V grade, PVC insulated, multi-stranded copper control wire.

Inspection terminal strip, number ferruling, labeling etc. shall be provided.

440 V caution board on the panel shall be provided.

#### 7.3.13 Installation

Capacitors banks shall be installed as per installation manual of supplier and shall conform to relevant Indian Standards.

All interconnections in the control panel shall be checked before commissioning.

Cable end boxes shall be sealed after cable connections to prevent absorption of moisture.

#### 7.3.14 Testing & Commissioning

The capacitor bank shall be subject to tests as specified in relevant Indian Standards at the factory and the test certificates shall be furnished in quadruplicate.

Insulation resistance shall be tested with a 1000 volts meagger between phases and phase to earth.

Residual voltage shall be measured after switching of the capacitors and the same shall not be more than 50 volts after one minute.

Each discharge resistor shall be tested for its working.

## **7.4 1.1 KV GRADE CABLES AND CABLE TRAYS**

### **7.4.1 Standards Of Codes**

This chapter covers the specifications for supply and laying of Medium Voltage XLPE insulated PVC sheathed FRLS cables for 1100 volts.

All equipments, components, materials and entire work shall be carried out in conformity with applicable and relevant Bureau of Indian Standards and Codes of Practice, as amended upto date. In addition, relevant clauses of the Indian Electricity Act 1910 and Indian Electricity Rules 1956 as amended upto date shall also apply. Wherever appropriate Indian Standards are not available, relevant British and /or IEC Standards shall be applicable.

### **7.4.2 Cables**

Medium voltage cables shall be aluminium/copper conductor XLPE insulated, FRLS PVC sheathed, armoured conforming to latest IS. Cables shall be rated for 1100 Volts.

All Conductor cables shall be as per BOQ.

Conductors shall be insulated with high quality XLPE base compound. A common covering (bedding) shall be applied over the laid up cores by extruded sheath of unvulcanised compound. Armouring shall be applied below outer sheath of PVC sheathing. The outer sheath shall bear the manufacturer's name and trade mark at every meter length. Cores shall be provided with following colour scheme of PVC insulation.

|             |   |                             |
|-------------|---|-----------------------------|
| 1 Core      | : | Red/Black/Yellow/Blue       |
| 2 Core      | : | Red and Black               |
| 3 Core      | : | Red, Yellow and Blue        |
| 3 ½ /4 Core | : | Red, Yellow, Blue and Black |

### **7.4.3 LAYING**

Cables shall be laid as per the specifications given below :

#### **7.4.3.1 Duct system**

Wherever specified such as road crossing, entry to building or in paved area etc. cables shall be laid in underground ducts. The duct system shall consist of a required number of stone ware pipes, GI, CI or spun reinforced concrete pipe with simplex joints and all the jointing work shall be done according to the CPWD building specifications or as per the instructions of the Engineer-In-Charge as the case may be. The size of the pipe shall not be less than 100mm in diameter for a single cable and shall not be less than 150mm for more than one cable and so on. The pipe shall be laid directly in ground without making any special bed but wherever asbestos cement pipes are used, the pipes shall be encased in concrete of 75mm thick. The ducts shall be properly anchored to prevent any movement. The top surface of the cable ducts shall not be less than 60 cm. below the ground level. The ducts shall be laid a gradient of at least 1:300. The duct shall be provided manholes of adequate size at regular intervals for drawing the cables. The manhole cover and frame shall be of cast iron and machine finished to ensure a perfect joint. The manhole covers shall be installed flush with the ground or paved surfaces. The duct entry to the manholes shall be made leak proof with lead-wool joints. The ducts shall be properly plugged at the ends to prevent entry of water, rodents, etc. Suitable duct markers shall be placed along the run of the cable ducts. The duct markers shall at least be 15 cm. square embedded in concrete, indicating duct. Suitable cable supports made of angle iron shall be provided in the manholes for supporting the cables. Proper identification tags shall be provided for each cable in the manholes.

#### 7.4.3.2 Cables in outdoor trenches

Cable shall be laid in outdoor trenches wherever called for. The depth of the trenches shall not be less than 75cm from the final ground level. The width of the trenches shall not be less than 45 cm. However, where more than one cable is laid, an axial distance of not less than 15 cm. shall be allowed between the cables. The trenches shall be excavated in reasonably straight line with vertical side walls and with uniform depth. Wherever there is a change in direction suitable curvature shall be provided complying with the requirements. Suitable shoring and propping may be done to avoid caving in of trench walls. The bottom of the trench shall be level and free from stone brick bats etc. The trench shall then be provided with a layer of clean, dry sand cushion of not less than 8 cm. in depth.

The cable shall be pulled over rollers in the trench steadily and uniformly without jerks and strains. The entire cable length shall as far as possible be paved of in one stretch. However where this is not possible the remainder of the cable may be removed by "Flaking" i.e. by making one long loop in the reverse direction. After the cable has been uncoiled and laid into the trench over the rollers, the cable shall be lifted slightly over the rollers beginning from one end by helpers standing about 10 mtrs. apart and drawn straight. The cable should then be taken off the rollers by additional helpers lifting the cable and then laid in a reasonably straight line.

For short cut runs and sizes upto 50 sq.mm of cables upto 1.1 KV grade any other suitable method of direct handling and laying can be adopted with the prior approval of the Engineer-in-charge.

When the cable has been properly straightened, the cores are tested for continuity and insulation resistance and the cable length then measured. The ends of all cables shall be sealed immediately. In case of PVC cables suitable moisture seal tape shall be used for this purpose.

Cable laid in trenches in a single tier formation shall have a covering of clean, dry sand of not less 17 cms above the base cushion of sand before the protective cover is laid. In the case of vertical multi tier formation after the first cable has been laid, a sand cushion of 30 cms shall be provided over the initial bed before the second tier is laid.

If additional tiers are formed, each of the subsequent tiers also shall have a sand cushion of 30 cms as stated above. The top most cable shall have final sand covering not less than 17 cms before the protective cover is laid.

Unless otherwise specified, the cables shall be protected by the second class bricks of not less 20 cms x 10 cms x 10 cms (nominal size) protection covers placed on top of the sand (bricks to be laid breadth wise) for the full length of the cable. Where more than one cable is to be laid in the same trench, this protective covering shall cover all the cables and project at 5 cm. over the sides of the end cables. The trenches shall be taken back filled with excavated earth free from stones or other sharp edge debris and shall be rammed and watered, if necessary, in successive layers not exceeding 30 cm, unless otherwise specified.

#### 7.4.3.3 Route Marker

Cable route marker marked "Cable" shall be provided alongwith the route of the cable and location of loops. The route markers shall be of tapered concrete slab of 60 x 60cm at bottom and 50 x 50cm at top having a thickness of 10cm. Cable marker shall be mounted parallel to and 50cm away from the edge of the trench.

#### 7.4.3.4 Cables in indoor trenches

Cables shall be laid in indoor trenches wherever specified. The trench shall be made of brick masonry with smooth cement mortar finish with suitable removable covers (i.e. precasted slabs or chequered plates). The dimensions of the trenches shall be determined depending upon the maximum number of cables that is expected to be accommodated and can be conveniently laid. Cables shall be arranged in tier formation in trenches and if necessary, cables may be fixed with clamps. Suitable clamps, hooks and saddles shall be used for securing the cables in position. Spacing between the cables shall not be less than 15 cm centre to centre. Wherever specified, trenches shall be filled with fine sand and covered with RCC or steel chequered trench covers.

#### 7.4.3.5 Cable on Trays/Racks

Cable shall be laid on cable trays/racks wherever specified. Cable racks/trays shall be of ladder, trough or channel design suitable for the purpose. The nominal depth of the trays/racks shall be 150 mm. The width of the trays shall be made of steel or aluminium. The trays/racks shall be completed with end plates, tees, elbows, risers, and all necessary hardware, entire steel trays/ racks shall be hot dip galvanized including widths & accessories. Cable trays shall be erected properly to present a neat and clean appearance. Suitable cleats or saddles made of aluminium strips with PVC covering shall be used for securing the cables to the cable trays. The cable trays shall comply with the following requirements :

The tray shall have suitable strength and rigidity to provide adequate support for all contained cables.

- a) It shall not present sharp edges, burrs or projections injurious to the insulation of wiring/cables.

- b) If made of metal, it shall be adequately protected against corrosion or shall be made of corrosion-resistant material.
- c) It shall have side rails or equivalent structural members.
- d) It shall include fittings or other suitable means for changes in direction and elevation of runs.

#### 7.4.4 Installation

Cable trays shall be installed as a complete system. Trays shall be supported properly from the building structure. The entire cable tray system shall be rigid.

Each run of the cable tray shall be completed before the installation of cables.

In portions where additional protection is required, non combustible covers/enclosures shall be used.

Cable trays shall be exposed and accessible.

Where cables of different system are installed on the same cable tray, non combustible, solid barriers shall be used for segregating the cables.

Cable trays shall be grounded by two nos, earth continuity wires. Cable trays shall not be used as equipment grounding conductors.

At no place the cable tray / rack / ladder running horizontally should rest on any building partition like Brick wall, RCC beams etc. but instead proper MS supports/ hangers to be provided at minimum of 1500 mm intervals and at every Turning Angles.

#### 7.4.5 Jointing and termination's

Cable jointing shall be done as per the recommendations of the cable manufacturer. All jointing work shall be done only by qualified/licensed cable jointer.

All jointing pits shall be of sufficient dimensions as to allow easy and comfortable working.

Jointing materials and accessories like conductor, ferrules, solder, flex, insulating and protective tapes, filling compound, jointing box etc. of right quality and correct sizes, confirming to relevant Indian Standards.



Each termination's shall be carried out using brass compression glands and cable sockets. Hydraulic crimping tool shall be used for making the end termination's. Cable gland shall be bonded to the earth by using suitable size copper wire/tape.

#### 7.4.6 Specific Requirements - Power Cables

The cables shall be 1100V grade, single / multicore, stranded XLPE insulated aluminium/copper conductor and FRLS PVC sheathed. The cables for emergency services shall be with additional FRLS properties. The cables shall conform to IS-1554 - Part - I (1988). For multicore cables, fillers used to fill in the space between the phases shall be non-hygroscopic, chemically inert and non-putrescent.

Cables laid outside the building, either buried or in trench shall be of armoured type.

#### 7.4.7 Specific Requirements - Control Cables

1100V grade multicore, 1.5 / 2.5 sq.mm stranded copper conductor, PVC insulated and extruded PVC inner sheathed and extruded FRLS PVC outer sheathed of PVC. FRLS cables, which have outer sheath of specially formulated FRLS PVC cable, shall be used for cables connected to Emergency services. The cables shall conform to IS 1554 Part- I (1985) / IEC 502 (1983) in all other respects.

Cables laid outside the building, either buried or in trench shall be of armoured type.

#### 7.4.8 Design Criteria For Cable Sizing

Power cables shall be selected on the following basis:

- a) Power cable shall carry the full load current of the circuit continuously under site conditions considering the various derating factors like ambient air temperature (45 deg C), grouping, laying methods etc.
- b) Power cables shall be sized to restrict the voltage drop to 5% and a voltage dip of 10% for motors.
- c) Power cable shall withstand the fault current of the circuit for the duration not less than the maximum time taken by the primary protective system to isolate the fault.

#### 7.4.9 Testing of Cables

Cables shall be tested at works for all routine tests as per IS including the following tests before being dispatched to site by the project team.

Insulation Resistance Test.

Continuity resistance test.

Sheathing continuity test.

Earth test.(in armoured cables)

Hi Pot Test.

Test shall also be conducted at site for insulation between phases and between phase and earth for each length of cable, before and after jointing. On completion of cable laying work, the following tests shall be conducted in the presence of the Owner's site representative.

Insulation Resistance Test (Sectional and overall)

Continuity resistance test.

Sheathing continuity test.

Earth test.

All tests shall be carried out in accordance with relevant Standard Code of Practice and Electricity Rules. The Contractor shall provide necessary instruments, equipment and labour for conducting the above tests and shall bear all expenses in connection with such tests. All tests shall be carried out in the presence of the Engineer In charge/ his representative, results will be noted and signed by all present and record be maintained. All the test certificate shall be submitted by contractor.

## 7.5 CABLE TRAYS

- 7.5.1 Cable Trays shall be Hot dip Galvanized and factory fabricated out of G.I. channels, angle iron, tee, bends, sections, flats and perforated sheet for different loads and number and size of cables as given below :

Cable trays shall be galvanized as per Specification given elsewhere.

1000 mm wide

Runners 25 x 100 x 25 x 3 mm

Rungs 2# 20 x 40 x 20 x 3 mm 250 mm C/C

Suspenders 2 Nos. 40 x 40 x 5 mm GI angle 1500 mm C/C with base support of 40x 40 x 5mm GI angle.

750 mm wide

Runners 20 x 75 x 20 x 2.5 mm

Rungs 20 x 30 x 20 x 2.5 mm 250 mm C/C

Suspenders 2 Nos. 32 x 32 x 5 mm GI angle 1800 mm C/C with base support of 40x 40 x 5mm GI angle.

600 mm wide

Runners 20 x 75 x 20 x 2.5 mm

Rungs 20 x 30 x 20 x 2.5 mm 250 mm C/C

Suspenders 2 Nos. 32 x 32 x 5 mm GI angle 1800 mm C/C with base Support of 40x 40 x 5mm GI angle.

450 mm wide

Runners 20 x 75 x 20 x 2.5 mm

Rungs 20 x 30 x 20 x 2.5 mm 250 mm C/C

Suspenders 2 Nos. 25 x 25 x 4 mm GI angle 1800 mm C/C with base support of 40x 40 x 5mm GI angle.

- 7.5.2 Supply and fixing of perforated type cable trays of the following sizes of pre-galvanized iron.

- a) 1000 mm width x 75 mm depth x 2 mm thick
- b) 900 mm width x 75 mm depth x 2 mm thick
- c) 750 mm width x 75 mm depth x 2 mm thick
- d) 600 mm width x 75 mm depth x 2 mm thick
- e) 450 mm width x 50 mm depth x 2 mm thick
- f) 350 mm width x 50 mm depth x 2 mm thick
- g) 300 mm width x 50 mm depth x 1.6 mm thick
- h) 250 mm width x 50 mm depth x 1.6 mm thick
- i) 150 mm width x 50 mm depth x 1.6 mm thick

Note: Suitable length of 10 mm dia GI rod suspenders at 1800 mm interval shall be included in the item for perforated type cable tray.

Specification for Hot Dip Galvanizing Process for Mild Steel Used For Earthing, Cable Trays Or Junction Boxes For Electrical Installation.

### 7.5.3 General Requirements

#### 7.5.3.1 Quality of Zinc

Zinc to be used shall conform to minimum Zn 98 grade as per requirement of IS:209-1992.

#### 7.5.3.2 Coating Requirement

Minimum weight of zinc coating for mild steel flats with thickness upto 6 mm in accordance with IS:6745-1972 shall be 400 g/sqm.

The weight of coating expressed in grams per square metre shall be calculated by dividing the total weight of Zinc by total area (both sides) of the coated surface.

The Zinc coating shall be uniform, smooth and free from imperfections as flux, ash and dross inclusions, bare patches black spots, pimples, lumpiness, runs, rust stains bulky white deposits, blisters.

Mild steel flats / wires shall undergo a process of degreasing pickling in acid, cold rinsing and then galvanizing.

The thickness of galvanizing shall be 610 gm / Sq. mtr. (87 Microns) in line with IS: 4759

All finished cable trays and accessories shall be free from sharp tees, corners, burrs and unevenness.

#### 7.5.3.3 Cable Trays - Installation Notes

Cable trays shall be installed generally at the elevations shown in respective cable tray layout drawings. If any major modifications in the drawings are envisaged in the field, these should be carried out after getting approval from design office.

Before laying the trays, contractor shall submit the shop drawing & take the approval from client/consultant.

It shall be the responsibility of the electrical contractor to mark up all the field modifications on the latest issues of the drawings and return two copies of all such “ as constructed ” drawings to client/consultant’s design office.

The type and size of tray to be used shall be as mentioned in the individual layout drawings.

Cable trays shall be welded to the mounting/carrier structures. Trays shall be supported with suitable angle/hitech rod supports.

Each continuous laid out length of cable tray shall be earthed at minimum two places by GI flats of minimum size 25x6 mm (unless otherwise noted) to the purchaser’s earthing system. The distance between earthing points shall not exceed 10 meters.

The following shall be checked before laying the cables on trays.

- a) Check for proper identification nos. of the trays.
- b) Check for continuity of cable trays over the entire route.
- c) Check that all sharp corners, burrs and waste materials have been removed from the tray.
- d) Obtain clearances from piping contractor / engineer that no piping will be taken in the way of cable trays.
- e) Check for earth continuity & earth connection of cable trays.
- f) Cable tray installation work shall comply with all currently applicable statutes, regulations and safety codes in the locality/country where the installation is to be carried out.

## **7.6 LIGHTING SYSTEM**

### **7.6.1 Scope**

This specification covers the design, material specification, manufacture, testing, inspection and delivery to site installation, testing and commissioning of lighting system equipment such as lighting fixtures, light control switches, receptacle units, lighting wires, lighting poles, conduits and other similar items necessary for lighting system. Customer / Architect shall have final authority to select light fittings.

### **7.6.2 STANDARDS**

The items of supply and installation shall comply with the latest applicable standards as specified in specification, Notes and Details and lighting layout drawings. Where no standards are available, the supply items shall be backed by test results shall be of good quality and workmanship and any supply items which are bought out by the CONTRACTOR shall be procured from approved manufacturers acceptable to the EMPLOYER.

### **7.6.3 LIGHTING FIXTURES AND ACCESSORIES**

#### **7.6.3.1 Lighting Fixtures / Luminaries – General Requirements:**

- a) Luminaries shall be designed for continuous trouble-free operation under atmospheric conditions without reduction in lamp life or without deterioration of materials and internal wiring. Outdoor fittings shall be weatherproof and waterproof.
- b) All Luminaries shall be supplied complete with lamps suitable for operation on a normal supply voltage and the variation in supply voltage and frequency indicated in data sheet.
- c) Fluorescent T5 type, sodium vapour and metal halide type Luminaries shall be complete with accessories like lamps, ballasts, power factor improvement capacitors, starters etc. These shall be mounted as far as possible in the Luminaries housing only. If these cannot be accommodated integral with the Luminaries then a separate metal enclosed control gear box shall be included to accommodate the control accessories together with a terminal

block suitable for loop-in, loop-out connections. Outdoor type fixtures shall be provided with outdoor type weatherproof box with IP 55 or better.

- d) Fluorescent type Luminaries with more than one lamp shall be provided with capacitors connected in lead-lag circuit for correction of stroboscopic effect.
- e) Each Luminary shall have a terminal block suitable for loop-in, loop-out and T-off connection. Terminals shall be of stud or clamp type. Terminal blocks shall be mounted with minimum two fixing screws.
- f) Mounting facility and conduit knockouts for the Luminaries shall be provided.
- g) All hardware used in the Luminaries shall be suitably plated or anodised and passivated for use in chemical, industrial and power plants.
- h) Earthing  
Each Luminaries and control gearbox shall be provided with an earthing terminal suitable for connection earthing conductor as indicated.
- i) Painting / Finish  
All surfaces of the luminaries / control gearbox housing accessories shall be thoroughly cleaned and degreased. It shall be free from scale, rust, sharp edges and burrs.  
The finish of the luminaries shall be such that no bright spots are produced either by direct light source or by reflection.
- j) External control gear box provided for housing accessories shall be galvanized.

#### 7.6.3.2 LED (Light Emitting Diode) FITTED LUMINAIRE

- a) The LEDs shall be of reputed make such as OSRAM / Philips / Lumileds / Cree/ Nichia.
- b) LED fixtures to be utilized for Utility area and Street lighting.
- c) LED module/ array shall deliver at least 85 % of initial lumens, when installed for a minimum of 50,000 hours.
- d) To enhance the secondary optics of the fixture, suitable Acrylic Optical Lenses shall be used.
- e) The Correlated Color Temperature (CCT) of the LED fixture shall be in the range of 5500-6000°K.
- f) The luminaries shall ensure a CRI of minimum 70.
- g) The Uniformity Ratio (Emin /Eavg) shall be minimum of 60%.
- h) The LED luminaries shall produce constant lux level in the voltage range of 140V to 280V. Voltage variations/ fluctuations in the specified voltage range shall not impinge upon the lux level it produces.
- i) The life span of the LED source including its Driver shall be minimum or greater than 50000 hours.
- j) The P/N junction temperature of individual LED must not exceed 100°C. High Thermal conduction must be achieved by use of silicon heat conductive greases an adhesive.

- k) LED Light must be constructed to achieve the average illumination of 35 LUX and at the ground level/ working level for the all the Utility Plants roads with the Uniformity Ratio ( $E_{min} / E_{avg}$ ) of minimum of 60% and tranverse ratio ( $E_{min}/E_{max}$ ) of 0.4 as per relevant to the employers requirement.
- l) All fasteners must be of stainless steel and rustfree.
- m) LED must be mounted on heat sinking conductive bars if any with suitable large area surface by means of fins to dissipate the conducted heat. The fins must be exposed to ambient flowing air.
- n) Heat sink used should be aluminium extrusion / high pressure die cast aluminium having high conductivity. Heat sink should be integrated within luminaire and efforts shall be made to keep the overall outer dimensions optimum such that it permits sufficient heat dissipation through the body itself so as to prevent abnormal temperature inside the luminaire and consequential damage to cover, gasket material, LEDs, lenses and drivers.
- o) The electrical component of the LED and LED driver must be suitably enclosed in hermetically sealed unit.
- p) In addition, LEDs should be voltage control dimmable with provision for power line communication modem or other standard communication system which shall be able to communicate with electronic drivers or similar type of lighting controllers and operate without generating excessive heat. All the LEDs should be “on” while dimming
- q) The luminary should be provided with in-built power unit & electronic driver. The luminary should be so constructed to ensure that the drivers are replaceable, if required.
- r) The luminaries shall conform to IEC 60598 or equivalent standard. The driver should comply with IEC 61347-2-13, IEC 61547, CISPR-15; and 61000-3-2. The supplier should submit luminary test report conforming to the specified standards.
- s) Light Distribution shall be of Cut Off/ Semi Cut Off type.
- t) Each lighting fixture shall be provided with an earthing terminal suitable for connecting 2.5 sq. mm (1 core of the 3Cx2.5 sq. mm copper-PVC cable to be used) copper stranded conductor.
- u) Applicable standards
- v) The standards and code of practices referred to below shall be the latest editions Including all official amendments and revisions.
- w) General safety requirements: IS 1913 - for luminaries
- x) Luminaries for street lighting: IS 10322 - electric cables
- y) Current waveform for the LED drivers should meet relevant national and international standard.
- z) Electronic components IC (Integrated circuit) shall be of industrial grade or above.
- aa) Metallic film/ Paper/ Polyester Capacitor shall be rated for a sustained operating temperature of 105° C.
- bb) The construction of PCBs and the assembly for components for PCBs should be as per IS standards.

#### 7.6.4 Construction

- a) The casing of the lighting luminaries shall be made of pressure die cast aluminum coated with epoxy polyester powder coat single. The driver unit must be accessible and if need be replaceable easily and with minimum use of tools.
- b) The casing made of non-corrosive aluminum having high conductivity shall have external surface designed in a manner so as to act as an efficient heat sink to extract heat generated at PN-junction of a LED. Efforts shall be made to install the fittings on the required street light pole without compromising on the performance of the LEDs or luminary.
- c) The assembly and manufacturing process for the LED source assembly in modules/arrays shall be designed to assure all internal components are adequately supported to withstand sudden impacts and mechanical shock and vibration from high winds and other sources.
- d) No part shall be constructed of polycarbonate unless it is UV stabilized.
- e) Material used for the lens of LED source shall be of toughened glass, heat resistant and shall not undergo discoloration during lifetime of the LED source. It shall conform to ASTM specifications for the materials. Any discoloration observed in the lens shall be considered a failure under warranty clause.
- f) All luminaries shall be provided with acrylic / polycarbonate / glass diffusers and/or aluminized reflectors and/or lenses to provide proper road lighting distribution.
- g) Toughened and/or tempered glass of sufficient strength may be provided under the LED chamber to protect the LEDs and luminaries.
- h) The LED lens shall be UV stabilized and shall be capable of withstanding ultraviolet (direct sunlight) exposure for a minimum period of 60 months without exhibiting evidence of deterioration.
- i) The finish of the fixture shall be powder coated and of grey colour.
- j) The luminaries shall be capable of operating normally in ambient temperatures from -20°C to 50°C maintaining junction temperature below 100°C and heat sink temperature below 60°C, ensuring efficient thermal management of the luminaire.
- k) The fixture shall be designed in such a manner that it is easy to handle and install, is not too large and unwieldy, is of robust construction, light weight and conforms to minimum IP66 class of protection for outdoor use. Luminary's manufacturer should submit IP test report from Govt. Accredited Test Lab / R&D Labs.
- l) The luminary shall be provided with a built-in external heat sink as well as an aluminum MCPCB printed circuit board, designed in such a way that the heat generated within the LED source is efficiently dissipated to the surrounding atmosphere without abnormal rise in temperature. Any debris build up shall not degrade heat dissipation performance of the luminaries. A lighting luminaire fitted with an assisted cooling system is not acceptable.



- m) The Entire LED lamps should be driven by minimum 2 or more numbers of the driver circuits. The entire power supply to the LED Lamps should be divided among the drivers, thus each driver controlling a group of LED lamps.

#### 7.6.5 Thermal Management

- a) The manufacturers shall ensure that the fixture is designed in such a manner that it conducts the heat away from the LEDs as efficiently as possible. The design shall ensure that the junction temperature is kept as low as possible during operation. Thermal management shall be in such a way that Luminare shall have trouble free operations from -20 °C to +50°C. The following tests shall be done to determine efficient thermal Management.
- b) The Fixture manufacturer shall perform solder point temperature (Tsp) measurement and compute junction temperature (Tj). The manufacturer shall show the proof that the junction temperature shall not go beyond the LED manufacturer's maximum junction temperature for long term lumen maintenance (i.e., 85% of the original value of lumen output after 50000 hours of operation).
- c) The fixture manufacturer shall furnish proof that the LEDs that have been offered and used in the fixture have White Point stability data (6000 Hours) as per IESNA's LM80-08, done at high ambient temperature 85°C and solder point temperature of 85°C.
- d) The fixture manufacturer shall furnish proof that the LEDs that have been offered and used in the fixture have been tested to IEC 62471 for safety requirements.

#### 7.6.6 Electrical

- a) The LED fitted lighting fittings shall operate at 50 Hz +/- 3 % Hz AC over a voltage Ranging from 140V to 280V with a power factor > 0.95 in a 3-wire distribution system. The total power consumption in the LED lighting fixture shall not exceed the total guaranteed power consumption including power consumption in the electronic circuit of the driver for that particular application over the entire voltage range given in clause.
- b) The fluctuations in line voltage shall have no visible effect on luminous intensity of the LED luminaries. The operating voltage of the luminaries shall be 230V. All parameters measured at this voltage shall stand valid for the entire operating voltage range of 140- 280V.
- c) Total harmonic distortion (THD) of current and voltage induced into the AC power supply by an LED lighting source shall not exceed 15% for current and 5% for voltage. Harmonic Generation shall be as per EN61000-3-2 and EN61000-3-3 / IEEE 519.
- d) The driver module on board circuitry shall include voltage surge protection to withstand High-repetition noise transients as stated in Section 2.1.6 of NEMA Standard TS-2/ 1992.

- e) The LED circuitry shall function at an operating frequency that must be greater than 120Hz to prevent perceptible flicker to the unaided eye over the entire voltage range Specified above.
- f) The lighting luminaries shall withstand the following tests.
  - a. HV test of 4.5 KV
  - b. IR test of 500V
- g) The output circuit shall have short circuit and open circuit protection inbuilt to the driver unit.
- h) The material used in the construction of driver printed boards; driver enclosure etc. shall be non-flammable and heat resistant. Also, all the PCBs in the system shall be coated to prevent any corrosion.

#### 7.6.7 Testing

- a) Design Qualification Testing shall be performed by the manufacturer or an independent testing lab hired by the manufacturer on new LED module/ array designs and when a major change has been implemented on an existing design.
- b) The bidder shall submit manufacturer's test certificates complete with verification of Design Qualification Testing details by an independent testing authority.
- c) The Luminaire manufacturer must show proof that the LEDs they use have been tested and approved to IESNA's LM80-09. The manufacturer must be able to provide the test data set to establish the authenticity and genuineness of the LEDs.
- d) Tests conducted on LED luminaries are classified as: 1) Type test, 2) Acceptance test, 3) Routine test and 4) Mock-up test.
  - i. Type Test shall be carried out to prove confirmation with the requirements of specification and general quality/ design features of the unit. In case of any change in Bill of Material or design of unit, complete type test shall be repeated. If any sample fails in any of the type tests, fresh samples shall be taken and tested. If any sample again fails in that test, the whole lot shall be rejected.
  - ii. Acceptance Tests are carried out by an inspecting authority at the supplier's premises on sample taken from a lot for the purpose of acceptance of a lot. Acceptance tests shall not be carried out from particular size or lot on which type tests have already been conducted,
  - iii. Routine Tests shall be performed by the manufacturer on each complete unit of the same type and the results shall be submitted to the inspecting agency, prior to offering the lot for acceptance test. The firm shall maintain the records with traceability.
  - iv. Mock up Test.  
The successful bidder shall provide proposed LED lamp and luminaries on three consecutive poles as demonstration to prove the suitability of the fittings matching with the requirement in regards to lux level,

quality of illumination for professional, objective & impartial review jointly by the bidders team along with team of MSME Engineers. This shall be carried out within two weeks from the date of issue of work order and prior to submission of detail design package for approval.

Sample size and criteria for conformity

The luminaries shall be selected from the lot at random. In order to ensure randomness of selection, procedures given in IS 4905-1968 (Reaffirmed 2001) may be followed.

#### **Test Scheme:**

| <b>Sr. No</b> | <b>Description of Test</b>               | <b>Type Test</b> | <b>Acceptance Tests</b> | <b>Routine Tests</b> |
|---------------|------------------------------------------|------------------|-------------------------|----------------------|
| 1             | Visual and Dimensional check             | <b>Y</b>         | <b>Y</b>                | <b>Y</b>             |
| 2             | Checking of documents of purchase of LED | <b>Y</b>         | <b>Y</b>                | <b>Y</b>             |
| 3             | Resistance to humidity                   | <b>Y</b>         | -                       | -                    |
| 4             | Insulation resistance test               | <b>Y</b>         | <b>Y</b>                | <b>Y</b>             |
| 5             | HV test                                  | <b>Y</b>         | <b>Y</b>                | <b>Y</b>             |
| 6             | Over voltage protection                  | <b>Y</b>         | -                       | -                    |
| 7             | Surge protection                         | <b>Y</b>         | -                       | -                    |
| 8             | Reverse polarity                         | <b>Y</b>         | <b>Y</b>                | <b>Y</b>             |
| 9             | Temperature rise                         | <b>Y</b>         | <b>Y</b>                | -                    |
| 10            | Lux measurement                          | <b>Y</b>         | <b>Y</b>                | -                    |
| 11            | Fire retardant                           | <b>Y</b>         | -                       | -                    |
| 12            | Test for IP66 protection                 | <b>Y</b>         | -                       | -                    |

#### **7.6.8 Marking**

- i. The following information shall be distinctly and indelibly engraved on the housing:

- Year of manufacture
- Batch Number
- Serial Number
- Name of Manufacturer
- Rated Wattage and Voltage (Input)
- Markings like CE, CB
- ii. ISO Certification: The agency shall preferably possess the ISO certification for design, Manufacturing and supply of the complete Lighting Unit.

#### 7.6.9 Guarantee Terms and Condition

- a) Warranty
- b) In addition to meeting the performance requirements for the minimum period of 60 months, the manufacturer shall provide a written warranty against defects in materials and workmanship for the modules/ arrays for a period of 60 months after acceptance of the modules/ arrays. Replacement modules shall be provided promptly after receipt of modules that have failed at no cost to the Owner.
- c) The bidder shall stand guarantee for full replacement of the luminaire due to any failure in 5 years, from the date of purchase. Failures shall include failure/ deterioration of LEDs in terms of performance like guaranteed luminous efficiency, high junction temperature, and abnormal lamp lumen depreciation, deterioration in LED including its lens, driver unit and quality of light. The vendor shall replace the entire LED module/ array of the defective luminaire with new module /array free of cost immediately.
- d) In the event of single LED source getting defective, the entire array/ module shall be replaced by the bidder by the new fittings.
- e) The bidder shall stand guarantee against lumen depreciation beyond 15%. Vendor shall ensure that LED module/ array shall deliver at least 85% of initial lumens, when installed for a minimum of 50,000 hours, failing which bidder shall carry out necessary rectification free of cost to the entire satisfaction of MSME.
- f) The bidder shall maintain appropriate level of inventory in India for immediate replacement of a defective/ malfunctioning luminaire/ LED module/ array/ driver etc.

#### 7.6.10 Compliance to Standards

- a) The luminaires shall comply with IS 10322 for functional, photometric and safety requirements. The fixture shall conform to safety standard EN60598.
- b) The luminaires shall conform to norms on transient voltages, voltage dips and fluctuations as per EN 61547.
- c) The luminaires fitted with LED source shall be CE and ISO certified to ensure quality of the LED source.
- d) The other relevant standards applicable to LED based lighting solutions to which lighting luminaire must conform are as under:

|                                |                                                                                                                                                                                                                                                                                                                                |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ANSI C78.377.2008              | Specifications for the Chromaticity of Solid State Lighting Products                                                                                                                                                                                                                                                           |
| IESNA LM- 79-08                | IESNA Approved Method for the Electrical and Photometric Measurements of Solid State Lighting Products.                                                                                                                                                                                                                        |
| IESNA LM-80-08 (Recommended)   | IESNA Approved Method for Measuring Lumen Maintenance of LED Lighting Sources.                                                                                                                                                                                                                                                 |
| UL Standards (Latest Approved) | <ul style="list-style-type: none"> <li>• <b>8750</b> Light Emitting Diode (LED) Light Sources for use in Lighting Products.</li> <li>• <b>1598</b> Luminaries</li> <li>• <b>1012</b> Power Units other than Class-2</li> <li>• <b>1310</b> Class-2 Power Units</li> <li>• <b>2108</b> Low Voltage Lighting Systems.</li> </ul> |
| IEC 62471                      | Photo-biological safety of lamps and lamp systems.                                                                                                                                                                                                                                                                             |

#### 7.6.11 Decorative Luminaries

##### a) Fluorescent Luminaries

- These luminaries shall be generally indoor type provided with cold rolled cold annealed (CRCA) sheet steel channel / rail cum reflector housing complete with all electrical control accessories mounted on it. The finish shall be stove enameled.
- Decorative fluorescent type luminaries shall be either open type, provided with translucent white opal acrylic diffusers, polystyrene lens prismatic or square polystyrene louvres.
- Luminaries shall be suitable for the number of lamps of specified wattage, direct mounting on ceiling / wall/ column pendant mounting or for recess mounting in false ceiling.
- Decorative luminaries with mirror optic reflectors shall be made with reflectors with a high specular reflectivity (of more than 90%) and wide-angle dispersion type. Where these luminaries are mounted in control rooms and computer rooms, special type of anti-glare mirror (CAT-2) system shall be provided to direct the light output in the desired direction. This is mainly to reduce reflection of the light source from computer screens.
- Luminaries mounted recessed in false ceiling shall be with reflector housing and spring loaded fixing arrangement for the diffuser / louver frame. It shall

be possible to have access to the lamp and other accessories from below.

- Low loss electronic ballasts shall be provided for all fluorescent & CFL lamp luminaries.

b) Incandescent / Mercury Vapour / Sodium Vapour / Metal Halide Luminaries

- Decorative luminaries with sodium vapour lamp / metal halide shall be generally outdoor weather proof type with degree of protection IP 55 suitable for conduit mounting.
- The luminaries may be provided with integral mounted control accessories or with external mounted control gear box.
- Decorative lantern luminaries shall be outdoor weather proof type with degree of protection IP 55, cast aluminums, stove enameled housing, prismatic heat resistant, toughened glass cover complete with neoprene gaskets, top or side conduit entry and integral mounted control gear box.

c) Bulk Head Luminaries

The luminaries shall be robust construction, cast aluminum / vitreous enameled housing, heat and shock resistant prismatic or clear glass cover fixed with neoprene gaskets for sealing. For mechanical protection to the glass cover, round steel wire guard with vitreous enameled finish shall be provided. The luminaries shall be suitable for incandescent lamp upto 150 watts, for direct mounting to ceiling / wall /column and is used for general purpose indoor lighting.

#### 7.6.12 Outdoors Luminaires

a) Street Lighting Luminaries

- Street lighting luminaries shall be outdoor weather proof LED and it will be fed from Solar panel.
- The luminaries shall be constructed of die-cast aluminium clear printed single panel, tempered safety glass cover adjust to tilt angles of 0°/5° Light distribution : Asymmetrical, ME-Optic (Characteristic : For street illumination) Elec. equip LED approx. 120W (5600k) with electronic ballast, IP-66, Protection rating-I, can be mounted on standard poles with fitter diameters - 60mm side mounted and 76.1 mm (Pole top mounted).

#### 7.6.13 Accessories For Luminaries

a) Reflectors

- The reflectors shall be made of CRCA sheet steel / aluminium / silvered glass/ chromium plated sheet copper as indicated for above mentioned Luminariess.
- Thickness of steel / aluminium shall comply with relevant standards specified in Data Sheet. Reflectors made of steel shall have stove enamelled / vitreous enamelled / epoxy coating finish. Aluminium used for reflectors shall be anodized / epoxy stove enamelled / mirror polished. The finish for

the reflector shall be as indicated for above-mentioned fittings and or in Data Sheet.

- Reflectors shall be readily removable from the housing for cleaning and maintenance without disturbing the lamps and without the use of tools. They shall be securely fixed to the housing by means of positive fastening device of captive type.

b) Lamp / Starter Holders

Lamp holders shall comply with relevant standards specified in Data Sheet. They shall have low contact resistance, shall be resistant to wear and shall be suitable for operation at the specified temperature without deterioration in insulation value. They shall hold the lamps in position under normal condition of shock and vibration met with under normal installation and use.

c) Ballasts

- Ballasts shall be designed manufactured and supplied in accordance with the relevant standards specified in Data Sheet. The ballasts shall be designed to have a long service life and low power loss.
- Ballasts shall be of the inductive, heavy-duty type copper wire wound, filled with thermosetting, insulating, moisture repellent polyester compound filled under pressure or vacuum. Ballasts shall be provided with taps to set the voltage within the range specified in enclosed Data Sheet. End connections and taps shall be brought out to a suitable terminal block rigidly fixed to the ballast enclosure. Ballasts shall be free from hum and such of those which produce hum shall be replaced by VENDOR with free of cost.
- Separate ballast for each lamp shall be provided in case of multi lamp Luminaries, except in the case of 2 x 20 watts Luminaries.

d) Electronic Ballast

Electronic ballast shall be suitable for 1x18W, 1x24W, 1x28W and 2x18W fluorescent lamp and shall be energy saving, warm start type having a power factor better than 0.96, having an optimum wattage delivery to the lamp. The choke shall be suitable for 180 – 270 V AC for operation at ambient temperature range of -15°C to +50°C. The choke shall have low radiated and conducted EMI / RFI. Refer BOQ

e) Digital Ballast

Digital ballasts shall be designed and manufactured with latest techniques using specially designed high-grade electronic components housed in pre coated galvanized sheet. Shall be suitable for operation with luminaries incorporating fluorescent and compact fluorescent lamps with dimming. The ballast shall be suitable for 200 – 320 V AC for operation at ambient temperature range of -15°C to +50°C. The ballast shall have low radiated and conducted EMI / RFI. Refer BOQ

f) HIGH FREQUENCY ELECTRONIC BALLAST

High frequency electronic ballast shall be used with fluorescent / Compact Fluorescent Lamps wherever specified in the schedule of quantities. High frequency electronic ballast shall comply to the following:

- IEC 927, IEC 928 for  $\leq 10\%$  total harmonic distortion.
- EMI / RFI – Confirming to FCC / VDE Class A/B.
- Line Transient as per IEEE C62.41.
- Ballast Crest Factor C1.7%.
- No Stroboscopic Effect
- Constant Wattage / Light output between  $240\text{ V} \pm 10\%$ .
- Circuit protection for surge current and inrush current.
- Short circuits, open lamp protection
- PF  $> 0.99$  for fluorescent / T5 lamp and 0.95 for CFL.
- Deactivated lamp protection
- Suitable for use with single and twin lamps
- RFI  $< 30\text{ MHz}$  EN 55015
- Total Harmonic Distortion (THD)  $\leq 10\%$
- Immunity to interference EN 61547
- Safety EN 60928 / IS 13021 (Part I)
- Performance EN 60929 / IS 13021 (Part II)
- Vibrations & Bump tests IEC 68-2-6 FC
- IEC 9001
- Quality Standard ISO 9001
- Environmental Standard ISO 14001
- DC Operation EN 60924
- Emergency Lighting Operation VDE 0108

g) Capacitors

Capacitors shall have a constant value of capacitance and shall be connected across the supply of individual lamp circuits.

Capacitors shall be suitable for operation at supply voltage and shall have a value of capacitance so as to correct the power factor of its corresponding lamp circuit to the extent of 0.95 lag or better.

Capacitors shall be hermetically sealed preferably in a metal enclosure to prevent seepage of impregnant and ingress of moisture.

### h) Lamps 5 Star Rating

Lamps shall be capable of withstanding small vibrations and the connections at lead in wires and filaments / electrodes shall not break under such circumstances.



Lamps / tubes shall conform to relevant standards specified in Data Sheet.

i) Fluorescent Lamps T5

Fluorescent T5 lamp luminaires shall be with TRULITE lamps, low wattage consumption, high efficiency and longer burning life (about 10000 hours).

T5 Lamps shall be of warm white or cool day light type with tri-band phosphor coated type, suitable for operation on 240V, single phase AC, in standard lengths of 2 and 4 feet.

T5 Lamp colour shall be colour-82 for lift lobby and colour 86 for all other areas.

#### 7.6.14 Lighting System Equipment

##### Light Control Switches

- a) Light control switches of ratings and types, i.e. decorative/industrial, shall be supplied as indicated in project layout drawings/price schedule. The switches shall be suitable for use on 240 V, 1 phase, 50 Hz supply.
- b) Switches shall be of flush type for mounting behind an insulated plate or incorporated with a switch or switch box/suitable enclosure. The switch box/enclosure may be recessed into or mounted on wall as per the requirements of project layouts.
- c) Size of enclosure boxes shall be chosen to accommodate the number of switches to be installed at the particular location. The enclosures shall be made of 1.2 mm thick CRCA sheet steel, stove enameled/galvanized. The enclosure box shall be covered with perspex/insulating cover. An enclosure intended for surface mounting shall not have holes or gaps in its sides other than those expressly provided for cable entry.
- d) Switches shall conform to the relevant standards.

#### 7.6.15 Receptacle Units

- a) Receptacle units shall consist of socket outlet with associated switch, neon indicating lamp and plug. The socket outlet and switch shall be flush mounted within a stove enameled/ galvanized 1.2 mm thick CRCA sheet steel enclosure with perspex/insulating cover. The box may be recessed into or mounted on a wall as per requirements of project layouts.
- b) Outdoor type receptacles shall be housed in a 2 mm thick CRCA sheet steel epoxy painted enclosure with gasket, hinged door having locking arrangement. The enclosure shall be with rain canopy and removable gland plate entry from bottom. Composite receptacle with switch modules housed in a box shall be with degree of protection IP 66.
- c) The receptacle units shall be suitable for 240 V, phase, 50Hz/415V, 3 phase, 50 Hz supply as indicated in project layout drawings/price schedule.
- d) Single-phase receptacles shall be associated with a switch/MCB of same current rating and the receptacle shall become live only when the associated switch/MCB is in "ON" position.

- e) Three phase receptacles shall be associated with a TPN switch housed in the same enclosure. The receptacle shall become live only when the associated switch is in “ON” position and it shall not be possible to withdraw the plug with the switch in “ON” position.
- f) Plugs shall be provided with cord grips to prevent strain and damage to conductors/wires at connection and entry points.
- g) Types and current ratings of receptacle units shall be as indicated in the layout drawing/price schedule and they shall conform to the applicable standards.
- h) Whenever stated in layout drawing/price schedule, receptacle units may be provided with MCBs instead of switch.

#### 7.6.16 Lighting Wires

- a) The wires for wiring in lighting system shall be 1100 V, 2Runs x 2.5 Sqmm multi starnd PVC insulated copper wires with 1Runs x 1.5 Sqmm multi starnd PVC insulated copper wire, The wires shall conform to the applicable standards.
- b) The minimum area of conductor for lighting fixtures shall be 2.5 sq.mm for phase, neutral and earth, for 13A and 16A receptacles conductor size shall be 1100 V, 2Runs x 2.5 Sqmm multi starnd PVC insulated copper wires with 1Runs x 1.5 Sqmm multi starnd PVC insulated copper wire.

#### 7.6.17 Lighting System Installation Work

##### Lighting Fixtures

- a) The installation of lighting fixtures shall be based on the mounting arrangement shown in the drawings enclosed with this specification. The unit rates quoted for installation shall include all materials required to mount the fixtures in the manner as shown in the drawings. Unit rate for installation of lighting fixtures shall include cost of installation of control gearbox wherever applicable.
- b) Installation of receptacles and switches shall be carried out suitably as per the lighting layout drawings. Switch shall be mounted in flush with the front cover plate. Cost of supply and installation of necessary hardware shall be included in the unit rates quoted for installation of receptacles/switches.
- c) Lighting distribution boards shall be installed in the location indicated in the layout drawings. Installation rates quoted for installation of lighting distribution boards shall include supply and installation of wall brackets, etc.

#### 7.6.18 External / Street Lighting Poles

- a) Swaged Type Welded M.S. Tubular Poles

##### 4.5/6 Meter High Pole:

4.5 meter high (3.5 meter above and 1 meter below ground) shall be 60 mm dia, 3.25 mm wall thickness MS tubular straight pole with a cast aluminium adaptor for post top mounting. Pole shall be provided with 300 mm x 300 mm x 6 mm thick MS base plate. Foundation for the pole shall be of cement concrete in 1:2:4 rates (1 part cement, 2 parts coarse sand and 4 parts stone aggregate) IP-65 weather proof junction box shall also be provided to

accommodate 1 No. 3 phase and neutral terminal block and 1 No. 6 amps SP MCB including 2.5 sq.mm PVC insulated copper conductor wires from the terminal block to the fixture and 2 Nos. 32 mm dia GI sleeves of suitable length shall be provided to the junction box.

b) Description of top bracket / arms

Single double decorative arm shall be provided on the pole (as asked for in B.O.Q.), secured with the help of two nos. bolts outreach not less than 400 mm.

c) Service window

A service window of the size 150 mm x 100 mm shall be provided in the base of the pole to allow access to electrical connections and terminations. It shall be covered with MS plate and proper rubber gaskets shall be provided to prevent any ingress of water etc.

d) Electrical connections

Four way connectors shall be provided along with Slide lock and 1 no. 6 amps Sp MCB including 2.5 sq mm PVC insulated copper conductor wires from the terminal block to the fixture and 2 nos. 32 mm dia GI sleeves of suitable length shall be provided up to the service window. An earth boss is provided on the control plate along with connectors and interrupters.

## 7.7 EARTHING SYSTEM

- 7.7.1 A complete earthing system comprising earthing conductors, earth electrodes and earth connections necessary for effective and permanent bonding to earth, all non-current carrying metal work and for termination of the earthing conductors of all electrical 415V switchboards, sub boards, distribution boards, etc., installed for the Electricity Distribution System for this project shall be supplied, erected and connected under this section of the specification and the associated drawings.

Earthing conductor shall be as follows

Conductors above ground level : Galvanised

and in cable trenches

Conductor buried in earth : GI

Electrodes : Galvanised Steel Pipe /Cu plate

The earthing conductor sizes shall be as follows

Main earthing conductor: Refer Earthing layout

Equipment earthing lead

|     |                                                                                                                       |   |                       |
|-----|-----------------------------------------------------------------------------------------------------------------------|---|-----------------------|
| (a) | 415 V Switchgear, Motor control centre and DG set                                                                     | : | Refer Earthing layout |
| (b) | Sub board, distribution boards, control panels, cable trays, 3/1 phase receptacles                                    | : | Refer Earthing layout |
| (c) | Lighting fixtures, single phase receptacles, power and lighting conduits, junction boxes, hand rails and exhaust fans | : | Refer BOQ             |
| (d) | Metallic non-current carrying structures                                                                              | : | Refer Earthing layout |

Earthing main conductor shall be provided around the buildings and interconnected as shown in the drawings. The Main Conductor and tap off Conductors length buried in soil shall be wrapped with bitumen tape for protection against corrosion.

Layout of earthing conductor inside the building shall be planned to provide earthing connection to all equipment and structures by short and direct earth leads. Grid riser in electrical shafts with tap-offs at each floor shall be provided.

The joints in the run of the earthing conductors shall be welded type. Connections with equipment/ structure shall be of bolted type.

Cable trays, steel pipes / conduits, steel columns, etc., shall not be used as earth continuity conductors.

Earth connections for all sections of installation shall be electrically and mechanically sound.

All electrical equipment rated 240 Volts and above shall be earthed at two points except the 3-phase / 1 phase receptacles, cable trays, lighting fixtures, conduits, hand rails, metallic non-current carrying structures, which shall be earthed at one point.

All works performed under this section shall also comply with the requirements of the local authority, IS 3043, 1987 and Earthing and Lightning Protection System-Notes and Details.

All three phase equipment shall be double earthed.

#### 7.7.2 Earthing Systems – Installation Notes

##### General

- a) These notes shall be read and considered in conjunction with earthing drawings and specification. In case of any conflict between these notes and drawings/ specification, the later shall prevail.
- b) Earthing system layouts are diagrammatic only. Exact location of earthing conductors, earth electrodes and test pits and connection may be changed to suit the site conditions. Major modification should be referred to EMPLOYER for clearance.
- c) Neutral point of the system of the different voltages, metallic enclosures and frameworks associated with all current carrying equipment and extraneous metal works associated with electric system shall be connected to a single earthing system unless stipulated otherwise.
- d) Earthing system installation shall be in strict accordance with the latest editions of Indian Electricity Rules, Relevant Indian Standards and codes of practice and Regulations existing in the locality where the system is installed.

#### 7.7.3 Earthing Conductor Layout

- a) Earthing conductor in outdoor area shall be buried at least 600mm below finished floor level unless stated otherwise.
- b) The spacing between adjacent rod / pipe electrode shall be twice the length of the electrode, unless otherwise stated elsewhere. The spacing between adjacent plate electrodes shall be 5000 mm minimum, unless otherwise stipulated otherwise.
- c) Earthing conductor around the building shall be buried in earth minimum distance of 1500mm from the outer boundary of the building.
- d) Earthing conductors embedded in the concrete floor of the building shall have at least 50mm concrete cover.
- e) Earthing conductor along their run on the columns, walls, etc., shall be fixed by suitable welding or cleating at intervals of 1000mm and 750mm respectively.
- f) Tap connections from the floor earthing grid to the equipment / structure to be earthed shall be terminated on the earthing terminals of the equipment, if the

equipment is available at the time of laying the grid. Otherwise “earth raiser “ or “earthing pads” shall be provided near the equipment foundation / pedestal for future connection to the equipment earthing terminals.

- g) In outdoor areas, buried conductors shall be brought 500mm above the ground level for making tap connections to the equipment (above ground level)
- h) Earthing conductors crossing the road shall be either installed in Hume pipes are laid at greater depths to suit the site conditions.
- i) Wherever earthing conductor cross underground service ducts, pipes, trenches, tunnels, railway tracks etc., it shall be laid in Hume pipes and minimum 300mm below them. The earthing conductor shall be re-routed in case it fouls with equipment foundation.
- j) Wherever earthing conductor passes through walls, floors etc., galvanized conduit / HDPE pipe sleeves shall be provided for the passage of the conductor. Both ends of the sleeve shall be sealed to prevent the passage of water through the sleeves. The seals in addition shall be fire proof if the specification / project drawings call for the same.
- k) Water stops shall be provided wherever earthing conductors enters the building from outside, below the ground level.
- l) Separate / isolated earthing system, if required, shall be provided for instrumentation and control and control systems in the plant, including dedicated earth pits.

#### 7.7.4 Equipment And Structure Earthing

- a) Earthing pads / terminals will be provided by the manufacturer of the apparatus/ equipment at accessible positions. The connection between the earthing pads/ terminals and earthing grids shall be made by short and direct earthing leads free from kinks and splices.
- b) Whether specifically shown in drawing or not, Steel / RCC columns, metallic stairs, Hand rails etc., of the building housing electrical equipment shall be connected to the nearest earthing grid conductor by at least one earthing lead. Electrical continuity shall be assured by bonding the different sections of the handrails and metallic stairs.
- c) Electrical conduits, pipes and cable tray sections shall be bonded to ensure electrical continuity and connected to earthing conductors at regular intervals. Apart from intermediate connections end and beginning points shall also be connected to earthing system. These details are covered separately under cabling installation notes and details which shall apply.
- d) Steel / RCC columns, metallic stairs, Hand rails, Cable trays, metallic conduits, and pipes etc. shall not be used as earth continuity conductor.
- e) A separate earthing conductor shall be provided for earthing lighting fixtures, receptacles, switches, junction boxes, lighting conduits, poles etc. This conductor in turn shall be connected to the main earth. These details are covered separately under lighting installation notes and details, which shall apply.

- f) Whenever earthing conductor crosses or runs at less than 300mm distance along metallic structures such as gas, water, steam pipes, conduits etc., and steel reinforcement in concrete, it shall be bonded to the same. In case earthing connection to pipe and conduit etc. at a distance higher than 300mm is required, the same shall be marked on the drawing.
- g) Miscellaneous items such as junction boxes, field switches, cable end boxes/ glands, fitting and fixture shall be earthed whether specifically show or not.
- h) In general minimum two earth leads shall be used for earthing each equipment / structure enclosing the power conductor operating at more than 250V and one earth lead if the voltage level is 250V or less.

#### 7.7.5 Jointing

- a) Earthing connections to equipment earthing pads / terminals shall be bolted type with GI bolts and nuts. Contact surfaces shall be free from scale, paint, enamel, grease, rust or dirt. Two bolts (min.) shall be provided for making each connection. Equipment bolted connections, after being checked and tested, shall be painted with anti corrosive paint/ compound.
- b) Connection between equipment earthing lead and main earthing conductors and between main earthing conductors shall be welded / brazed type. For rust protection the welds shall be treated with red lead and afterwards thickly coated with bitumen compound to prevent corrosion.
- c) Steel to copper, copper to copper connections should be brazed type. Welding shall be adopted in case of steel. Welding to be done as per IS: 816.
- d) The jointing whether welded, brazed or bolted shall be such that the resistance of the joint is not more than the resistance of the equivalent length of the conductor.
- e) Welding / brazing surfaces shall be cleaned and made free of all oxide films, grease, oil or any foreign material. However, the joining surfaces should not be made too smooth / highly polished, to prevent the joining material from flowing away.
- f) All brazing should be done by oxy- acetylene torch flame.
- g) All welded connections shall be made by electric arc welding. All welded joints shall be allowed to cool down gradually to atmospheric temperature before putting any load on it. Artificial cooling shall not be allowed.
- h) Bending of large diameter rod / thick conductors shall be done preferably by gas heating.
- i) All arc welding with large diameter conductor shall be done with low hydrogen content electrodes.
- j) For brazing alloys of silicon bronze/ phosphor or copper/ phosphor-silver-copper shall be used.

#### 7.7.6 Cable Earthing

Metallic sheaths, screens and armour of all multicore power/ control cables shall be earthed at both equipment and source / switchgear end. Sheath and armour of single

core power cables shall be earthed at source /switchgear end only, unless otherwise stated elsewhere.

#### 7.7.7 Testing & Commissioning

After completion of erection works before equipment is charged, the following minimum test shall be carried out. All test shall be recorded in the format as approved by Architect/Consultant besides the test mentioned below any other tests specified by the local authority shall also be carried out. All tools and celebrated instruments for testing, labour, materials and incidentals necessary, to conduct the tests mentioned below shall be provided by the contractor at his own cost.

- Insulation resistance test of all the feeders by 500 V megger.
- Insulation resistance test of all LT cables with 500 V megger.
- Continuity test of all the cores and the armour cables.
- Sheathing continuity test.
- Testing of Wiring:
  - All wiring systems shall be tested for continuity of circuits, short circuits, and earthing after wiring is completed and before installation is energized.
- Testing of Earth Continuity Path:
  - Insulation resistance Test
  - Polarity test of switches

The above test reports shall be submitted by contractor to Engineer incharge.



## **7.8 LIGHTNING PROTECTION SYSTEM**

The lightning protection air termination rods and/or horizontal air termination conductors shall be fixed in such a way that they remain in their installed position even during severe weather conditions. The necessary accessories such as cleats, clamps, welding materials, bolts, nuts, shall be supplied by CONTRACTOR.

- 7.8.1 Air termination system shall be connected to earthing system below ground by down conductors as shown in various project drawings. For this purpose separate treated earth pit to be constructed. The down conductors shall follow a direct path to earth. There shall not be any sharp bends, turns and kinks in the down conductors.
- 7.8.2 All joints in the down conductors shall be of welded/brazed type. All metallic structures within 2 meters from down conductors shall be bonded to lightning protection system.
- 7.8.3 The lightning protection system shall not be in direct contact with underground metallic service ducts, cables, cable conduits and metal enclosures of electrical equipment. However all metal projections, railings, vents, tanks etc. above the roof shall be bonded together to form a part of roof grid.

## **7.9 DIESEL GENERATORS**

### **7.9.1 Scope**

The scope of this section consists of but not necessarily limited to the following in accordance to Technical specification prescribed in tender:

- a) The contractor shall supply, deliver to site, hoisting into position, install, test and commission the Prime rated power generating set together with the necessary controls and switchboards as specified and indicated in the Drawings. Protection circuits, control wiring and interlock circuits not specified or indicated in the Drawings, but deemed necessary for the safe operation of the generating system shall be provided without any additional cost to complete the system.

- b) Provide manufacturer's factory representative's services, including coordination, and start-up and testing supervision.
- c) Testing (factory and field), start-up supervision, training and providing necessary documentation and tools for operation.
- d) Carry out performance test run at site with Load bank & Lube oil etc. arranged by contractor.

#### 7.9.2 Engine

Engine shall be multiple cylinder vertical, 4 stroke cycle, Prime rated, multi-cylinder direct injection, compression ignition type operating at a speed of 1500 rpm and shall be silent, vibration free while in operation and comply Center / State Pollution Control Board , turbo charged after cooled as BS 5514/ISO 3046, 1500 RPM. Engine shall deliver not less than 80 kW at site at 0.8 lagging power factor and shall be suitable for sustaining of 10% overload for 1 hour in every 12 hours of continuous operation at full load without damage. Engine shall be with the following accessories:

- a) Flywheel to suit flexible coupling.
- b) Dry type air cleaner. Replaceable air cleaner elements with mechanical air restriction gauge mounted on air cleaner. The filter shall be suitable for operation under dusty conditions.
- c) Exhaust Residential Type silencer with flexible connections and thermal lagging.
- d) Electronic Instrument panel comprising of:
  - Power Command Control Module or equivalent ( for AMF System )
  - Sensors
  - Fuel control actuators
  - Fuel shut-off valves
  - Starting switch with key.
  - Lube Pressure Gauge.
  - Water temperature gauge.
  - Battery charging ammeter & voltmeter.

- e) Hour meter with RPM indicator.
- f) Safety control for low lube, oil pressure, high water temperature and over speed.
- g) Lube oil cooler with all standard accessories.
- h) Lube oil filter with replaceable type filter element as required.
- i) Fuel oil system comprising.
  - 5 mm thick epoxy coated from inside MS Steel sheet daily service fuel tank of 225 liters capacity including with glass type level indicator and level controllers with potential free contacts.
  - Fuel transfer pump including piping, fitting valves, strainers, filters between day tank and engine.
  - All instrumentation and control for day tank.
- j) 2 No. 12 volt 25 plate lead acid batteries in series and parallel connection to make 24 volts, 4 x 180 Ah batteries duly charged along with connecting leads mounted on acid resistant frame work.
- k) Anti vibration mounts as per manufacturer recommendation.
- l) Electronic Governor with governing class 'A' direct.
- m) All moving parts to be mechanically guarded to minimize hazard to people around.

Air intake and exhaust systems with filters, residential type silencers, ducts, pipes, dampers, fittings, supports and other necessary accessories.

The exhaust gas expulsion system shall be in accordance with the drawings. The exhaust piping shall be fitted with hospital type silencer in order to limit the sound level. Expansion joints shall take care of thermal deformations. The pressure drop in exhaust piping including silencer, bends, expansion joints etc., shall be compatible with exhaust gas leaving the engine. The exhaust piping shall be duly covered throughout the length from engine outlet upto the outlet point with mineral wool insulation and aluminium sheet cladding. The exhaust piping shall be independent for each engine and shall be with minimum bends. The bending radius of bends shall be not less than 3-internal diameters of chosen piping. A drain plug shall be fitted at the lowest point of piping for

condensate extraction. The exhaust pipe shall meet the following regulations of pollution board as mentioned. Suitable supports shall be provided for proper installation of exhaust pipes.

### 7.9.3 Limits Of Noise For Power Generating Sets Manufactured On Or After The 1st January, 2005

#### 7.6.3.3 Applicability

These rules apply to Generator sets of rated output, installed on or after 1st January, 2005.

#### 7.6.3.4 Requirement of Certification

Every manufacturer or importer of Power Generating set must have valid certificates of Type Approval and also valid certificates of conformity of production for each year, for all the product models being manufactured or imported after 1st January, 2005 with the specified noise limit.

All Power Generator shall have a valid Type Approval certificate and conformity of production certificate.

All Power Generator shall have conformance label meeting the requirements.

The conformance label shall contain the following information:

- a) Name and address of the supplier (if the address is described in the Client's manual, it may not be included in the label).
- b) Statement "This product conforms to the Environment (Protection) Rules, 1986"
- c) Noise limit viz. 75 dB(A) at 1 m.
- d) Type approval certificate number.
- e) Date of manufacturer of the product.

#### 7.6.3.5 Authorized agencies for certification

The following agencies are authorized to carry out such tests as they deem necessary for giving certificates for Type Approval and Conformity of production testing of Generator and to give such certificates :

- a) Automotive Research Association of India, Pune.
- b) National Physical Laboratory, New Delhi.

c) Naval Science & Technology Laboratory, Palghat

d) National Aerospace Laboratory, Bangalore

#### 7.6.3.6 Alternator

The alternator shall be brushless synchronous and suitable for 3 phase, 415 volts, 50 Hz., 0.8 p.f. and 1500 RPM.

The alternator shall be suitable for coupling directly to the engine described in clause no. 1.3 It shall be drip proof screen protected as per IP23.

The alternator shall be continuously rated and shall have class “H” insulation designed and built to withstand tropical conditions. It shall be conforming to IS:4722-1992. The output of the alternator shall be 400 KW rated output at site conditions at 0.8 lagging power factor and shall be suitable for sustaining of 10% overload for 1 hour in any 12 hours period without damage.

Six nos. embedded Resistant Temperature Detector (RTDs) of platinum, 100 ohms resistance at 0 degree to measure the winding temperature and 2 Nos. BTDS to measure bearing temperature shall be provided.

The leads of embedded RTDs shall be wired upto the terminal block in a separate terminal box. Manufacturer shall indicate the setting values for each RTD/ BTD for alarm and trip.

Greasing facility with grease nipples and grease relief device shall be provided.

All external nuts and bolts shall be of high tensile steel only.

Alternator shall be provided with anti-condensation space heater of adequate rating suitable for 240 V, 50 Hz, 1 Phase AC supply and shall be wired upto a separate terminal box.

The independent earth terminals on the frame complete with nuts, spring washer and plain washer shall be provided.

Alternator shall be provided with suitable adaptor box for termination of cables. Suitable arrangement shall be provided in the terminal box for formation of star point for Alternator neutral earthing.

QDCT for synchronizing relay i.e. DG Set shall be capable of working in synchronizing with other DG sets. The supply of any relays, contactors, CT's etc required for this purpose shall be included.

Alternator shall be suitable for bearing the starting current of Transformer after changeover.

#### 7.6.3.7 Excitation System

The alternator shall be provided with a complete rotating diode type brushless excitation system, capable of supplying the excitation current of the generator under all conditions of output from no load to full load and capable of maintaining voltage of the generator constant at one particular value.

The exciter shall have class 'H' insulation.

The excitation system shall comprise a shaft driven AC exciter with rotating rectifiers. The rectifiers shall have in-built protection for over voltage.

The exciter shall be fast response type and shall be designed to have a low time constant to minimize voltage transients under severe load changes. The excitation voltage response ratio shall be at least 0.8.

The rated current of the main exciter shall be at least 10% more than the alternator rated exciter current and it shall have 40% overload capability for 10 seconds.

No external supply shall be required during starting and normal running of the alternator.

#### 7.6.3.8 Automatic Voltage Regulator

An automatic high speed, dead band type voltage regulator shall be provided, complete with all accessories. The regulation system shall be provided with equipment for automatic and manual control.

The regulator shall regulate the output voltage from generator current and potential signals. Series compounding transformer shall be provided to enable maintaining adequate terminal voltage in the event of terminal faults. Alternatively excitation system shall be provided with arrangement for field forcing. Contractor shall

coordinate suitability of protection relays for generator with the operational characteristics of automatic voltage regulator, specially under short circuit conditions.

Voltage regulation and steady state modulation shall be within  $\pm 0.5\%$  of the line voltage.

Necessary equipment for field suppression and surge protection shall be provided as integral part of alternator.

The response time of exciter and the generator shall be properly matched to avoid hunting.

AVR system shall be provided with equipment for automatic and remote operation / control.

AVR shall be suitable for 24 V supply.

Necessary equipment shall be furnished for the following.

- To prevent automatic rise of field voltage in case of failure of potential supply.

#### 7.6.3.9 Acoustic Enclosure For Diesel Generator

Acoustic Enclosure for DG Set shall be as given below:

|           |                     |   |                                    |
|-----------|---------------------|---|------------------------------------|
| <b>a)</b> | DG Set Capacity     | : | 100kVA                             |
| <b>b)</b> | Structure           | : |                                    |
| <b>c)</b> | Panels              | : |                                    |
| <b>d)</b> | Thickness of panels | : |                                    |
| <b>a.</b> | Outer sheet         | : |                                    |
| <b>b.</b> | Inner Sheet         | : |                                    |
| <b>c.</b> | Frame & Strainer    | : |                                    |
| <b>e)</b> | Insulation          | : | Mineral wool as per IS 8183 – 1993 |
| <b>f)</b> | Thickness           | : | 100 mm thick (50 mm x 2 slabs)     |
| <b>g)</b> | Density             | : | 64 Kg / m <sup>3</sup>             |

**h) Air Circulation System**

- Air Intake System : Axial flow fans of suitable capacity for 100 KVA DG Set offered.
- Air Exhaust System : DG set offered

**i) Finishing : Weather proof polyurethane paint**

(Shade approved by Consultant / OWNER.

Paint coating to be done after each

component goes through 7 tank process.)

**j) Noise Level : 75 dBA at a distance of one meter (as per CPCB)**

**k) Insertion Loss : 25 dBA**

**l)  $\Delta T$  inside enclosure : should not exceed from 7 degree C above**

**i. ambient temperature. 1 No. dial gauge temperature monitor shall also be provided.**

**m) Location : Outdoor type**

**n) Lighting / Switch / : Proper arrangement shall be provided inside**

**i. Wiring / Fans the acoustic enclosure**

**7.6.3.10 Microprocessor Based Auto Starting & Auto Mains Failure.**

**General**

The auto synchronizing shall be provided as mentioned below and as per Schedule of Quantity.

**Protection Through Relays (For DG Set)**



Following protection shall be provided through Numerical relay both for the stator side and the rotor side if not provided in the controller:

a) Voltage restrained over current protection (50/51)

Relay shall not work when a over current fault occurs, due to higher current levels. There shall be drop in terminal voltage for the same fault impedance, the fault current shall reduce (with respect to terminal voltage) to a level below the pick-up setting. Consequently, relay shall not pick-up. It shall be necessary to have a relay whose pick-up setting shall be automatically reduce in proportion to terminal voltage. Hence, the over current protection shall be voltage restrained. Two levels over current protection shall be provided i.e. low set and high set (for short circuit protection)

b) Thermal overload (49)

It monitors the thermal status of machine for current between 105% to the low set O/C level (normally 150%).

c) Under / Over Voltage (27 / 59)

This will protect the machine from abnormal voltage levels, particularly during synchronization and load throw off conditions.

d) Under / Over Frequency (81)

This will protect the machine from abnormal frequency levels, particularly during synchronization and load throw of conditions. This will also help in load shedding scheme for the generator.

e) Breaker Failure Protection (52 BF)

This protection detects the failure of breaker to open after receipt of trip signal. Another trip contact is generated under breaker fail conditions, with which more drastic measures (like engine stoppage, etc.) can be taken.

#### 7.6.3.11 Metering For Each DG

As mentioned in the Single line diagram.

#### 7.6.3.12 Annunciation

Annunciators with Hooter, Test, Accept and Reset P.B. and Annunciator.

16 Window Solid State Annunciator for each DG sets.

| Channel No. | Inscription                                                         |
|-------------|---------------------------------------------------------------------|
| 01          | Set fails to start (only alarm)                                     |
| 02          | Over current (breaker trip)                                         |
| 03          | Earth Fault (Breaker trip)                                          |
| 04          | Excitation Failure (Engine should be stop with breaker trip)        |
| 05          | Reverse Power (Breaker trip)                                        |
| 06          | Over speed (Breaker will trip with engine stop command)             |
| 07          | Low Lube Oil pressure (Breaker will trip with engine stop command)  |
| 08          | High Water Temperature (Breaker will trip with engine stop command) |
| 09          | Over / Under Voltage (Breaker trip)                                 |

#### 7.6.3.13 PRE-COMMISSIONING CHECKS

All standards checks including the ones elaborated in the specifications to ensure that the installation of the DG sets and associated systems has been carried out satisfactorily shall be done on completion of installation. These shall include.

DG sets

- a) Checking of piping interconnections
- b) Checking electrical interconnections
- c) Checking of insulation resistance
- d) Checking of earthing
- e) Checking of instruments and controls.
- f) Checking of alignment

- g) Checking of vibration transmission to building a structure.
- h) Checking of expansion joints.

Exhaust system

- a) Checking of silencer operation
- b) Checking of surface temperature of exhaust piping

Fuel system

- a) Checking of automatic operation of fuel transfer pumps.

Upon completion of work the performance test shall demonstrate the following among other things:

- a) Equipment installed complies with specification in all respects and is of the correct rating for the duty and site conditions.
- b) All items operate efficiently and quietly to meet the specified requirements.
- c) All circuits are correctly protected and protective devices are properly coordinated.
- d) All non current carrying metal parts are properly and safely grounded in accordance with the specifications and appropriate codes of practice.

#### 7.6.3.14 **DG Sets – Test Procedure**

The Tenderer shall enclose copies of type test certificates, wherever applicable, for all the equipments and materials, quoted by him, along with the bid for Employer's reference as per the relevant standards specified.

All the type tests, if not conducted earlier on similar type of equipments, covered under the relevant standards, shall be conducted, wherever required, by the suppliers for all the equipment and materials at manufacturer's works in the presence of the Employer's representative. The test certificates of all the equipments / materials shall be approved by the Employer's representative before dispatch / acceptance of the equipment and materials. Routine tests for all equipment will be witnessed by Engineer's Representative.

The following tests shall be done at works before dispatch,

Tests on alternator:

|     |                                                                       |
|-----|-----------------------------------------------------------------------|
| 1   | DC Resistance Measurement                                             |
| 1.1 | Stator                                                                |
| 1.2 | Rotor                                                                 |
| 2   | Insulation Resistance Measurement, before and after High Voltage Test |
| 2.1 | Stator                                                                |
| 2.2 | Rotor                                                                 |
| 3   | High Voltage Test                                                     |
| 3.1 | Stator                                                                |
| 3.2 | Rotor                                                                 |
|     | Functioning Tests on RTDs                                             |
|     | DC Resistance Measurement                                             |
|     | Characteristics                                                       |
|     | No Load Saturation Tests                                              |
|     | Open Circuit Magnetization Characteristics                            |
|     | Voltage Measurement                                                   |
|     | Symmetry of generated voltage                                         |
|     | Phase Sequence (Phase Rotation) check                                 |
|     | Direction of Shaft Rotation check                                     |
|     | Vibration Measurement                                                 |
|     | During No Load Mechanical Run                                         |
|     | During No Load Open Circuit Magnetization Test                        |
|     | During Sustained 3Phase Short Circuit Magnetization Test              |
|     | Over speed test (120% of rated speed for 2 minutes).                  |
|     | Regulation Tests                                                      |
|     | Voltage & current                                                     |

|  |                             |
|--|-----------------------------|
|  | Temperature Rise Test       |
|  | No Load losses              |
|  | Determination of efficiency |

The following tests shall be carried out on Generator and Excitation system:

- a) Insulation Resistance Tests
- b) Winding Resistance Test
- c) Phase sequence Test
- d) Open and Short Circuit Characteristic Test
- e) AVR response / Regulation Test.
- f) Load test on Generator at both unity and 0.8 PF.
- g) Excitation at full load and under specified variation of voltage and speed
- h) Measurement of voltage dips at the generator terminals while feeding the base load 75% and on simultaneous starting of the largest motor.
- i) EMPLOYER reserves the right to reject the equipment if the guaranteed performance is not met with.
- j) All instruments required for performance testing of the equipment covered in this specification shall be provided by the TENDERER at no extra cost to the purchaser for entire duration of the performance test.
- k) The TENDERER shall ensure that instruments and gauges to be used for testing and inspection of critical parameters as identified in the specification shall have valid calibration and the accuracy can be traceable to National Standards.
- l) In addition to the above guarantees, TENDERER shall also guarantee the period for completing supply, erection, testing and commissioning as six (6) months for DG set and accessories from the date of Letter of Award.

Load / Run Test at Site :

DG sets shall be tested at different loads at site after dispatch and installation at site.

In case at any point of the test a trip should occur the test shall be conducted again.

The necessary fuel oil, lube oil & consumables required for the test shall be provided by contractor. No extra payment shall be made in this regard.

Copies of manufacturer's type test for the engine and the alternator of all ratings shall be enclosed along with the dispatch of the DG sets as per relevant standard/ codes.

The contractor shall provide all necessary instruments and labour for testing. He shall make adequate records of test procedures and readings and shall repeat any tests requested by the Engineer Incharge. Test certificate duly signed by an authorized person shall be submitted for scrutiny.

If it is proved that the installation or part thereof is not satisfactorily carried out then the contractor shall be liable for the rectification and retesting of the same as called for by the Engineer Incharge. All tests shall be carried out in the presence of Client inspection team.

These tests shall form part of this contract. Above tests shall be conducted for all DG sets. The test results shall match with the technical requirements specified in the technical data sheet.

The Engineer Incharge shall have the right to accept or reject the modules if it does not meet the technical requirements.

The load test shall be conducted through resistive load bank at unity power factor.

Before conducting test, following shall be recorded on test report :

- a) Engine serial No.
- b) Engine model & make No.
- c) Alternator serial No.
- d) Engine & alternator rating
- e) Date of testing
- f) Rated speed, voltage & kW

Loads & duration: Engine shall be given a test run for atleast six hours with alternator supplying full rated load at site and overload test to the extent of 10% over the rated load shall be conducted immediately after the full load run test

No load : 5 mins

25% load – 30 mins

50% load – 30mins

75% Load – 30 mins

100% Load- 4.5 hrs

110% Load – 1 hr

The following parameters shall be noted on the test report

| Description                                  | Time ( After start of Load test) |      |      |      |      |      |      |
|----------------------------------------------|----------------------------------|------|------|------|------|------|------|
|                                              | 1 hr                             | 2hrs | 3hrs | 4hrs | 5hrs | 6hrs | 7hrs |
| <b>a)</b> Load in kW                         |                                  |      |      |      |      |      |      |
| <b>b)</b> Power factor                       |                                  |      |      |      |      |      |      |
| <b>c)</b> Voltage                            |                                  |      |      |      |      |      |      |
| <b>d)</b> Current                            |                                  |      |      |      |      |      |      |
| <b>e)</b> Frequency                          |                                  |      |      |      |      |      |      |
| <b>f)</b> Alternator winding temperature     |                                  |      |      |      |      |      |      |
| <b>g)</b> Alternator bearing temperature     |                                  |      |      |      |      |      |      |
| <b>h)</b> Lube oil pressure                  |                                  |      |      |      |      |      |      |
| <b>i)</b> Lube oil temperature               |                                  |      |      |      |      |      |      |
| <b>j)</b> Fuel consumption though flow meter |                                  |      |      |      |      |      |      |
| <b>k)</b> Cylinder head temperature          |                                  |      |      |      |      |      |      |

#### Impact test:

A block load of at least 50% shall be put on the DG from no load condition & similarly when DG is 100% loaded, the load is removed & the parameters like voltage, frequency & RPM is noted. The readings should be within acceptable limits.

#### Performance Tests

- a)** The following items of performance shall be guaranteed during site performance tests in respect of the DG and the auxiliaries for the specified site conditions:
- b)** Net electrical output (continuous)
- c)** Freedom from vibration and noise
- d)** Governor response, over-speed trip and speeder gear capability
- e)** Voltage regulator response
- f)** Excitation at full load and under specified variation of voltage and speed.

#### Start-up & testing at site

A equipment manufacturer's representative approved by the Consultant / Client shall be engaged to perform start-up and load test upon completion of installation with the Consultant / Client in attendance. A certified test record shall be provided.

Tests shall include, but are not be limited to, the following:

- a)** Check fuel, lubricating oil, and antifreeze in liquid cooled models for conformity to the manufacturer's recommendations under environmental conditions present.
- b)** Test, prior to cranking of engine, for proper operation of accessories that normally function while the set is in a standby mode.
- c)** Check, during start-up test mode, for exhaust gas leaks outside the building, cooling air flow, movement during starting and stopping, vibration during running, line-to-line voltage and phase rotation.



- d) Test by means of simulated power outage, automatic start-up by remote-automatic starting, transfer of load, and automatic shutdown. Engine generator sets are to be synchronized and paralleled during tests. Monitor throughout the test, engine temperature, oil pressure, battery charge level, generator voltage, amperes, and frequency.
- e) Tests shall demonstrate capability and compliance of system with operating requirements. Where possible, correct malfunctioning units at site then retest to demonstrate compliance; otherwise remove and replace with new units, and proceed with retesting. Retesting to be at no cost to the Consultant / Client.
- f) This section includes a very basic outline of the start-up sequence. The actual sequence will be determined after the final design is completed. The commissioning of the new generators will occur on weekends and after-hours depending upon the scheduling requirements of the business.

#### 7.6.3.15 **Rejection**

The purchaser may reject any DG Sets during tests or service any of the following conditions arise and the provision under the relevant clause of the general conditions of contract shall immediately become applicable:

If it is not adhere to:-

- a) GUARANTEED TECHNICAL PARTICULARS- Diesel Engine.
- b) GUARANTEED TECHNICAL PARTICULARS- Generator
- c) DG Sets fails on performance guarantee test at works.
- d) DG Sets fails on performance guarantee test at site.
- e) Proven performance in number of running hours for the type / Model of the DG set
- f) DG Sets is proved to have been manufactured not in accordance with the agreed specification.
- g) The purchaser reserves the right to retain the rejected DG Sets and take it into service until the tenderer replaces the defective DG Sets by a new acceptable DG Sets at no extra cost. The tenderer shall repair or replace the DG Sets

within a reasonable period mutually agreed time to the satisfaction of the purchaser at no extra cost.

## **7.10 UPS SYSTEM**

### **7.10.1 General Requirements**

- a) This specification covers the design, manufacture, testing, inspection at Manufacturer's works, packing, forwarding and transport to site, unloading, storing, installation, testing and commissioning of the UPS System as described herein and shown on the drawings.
- b) The UPS system shall consist of rectifier / battery charger, batteries, inverter, static bypass transfer switch, synchronizing devices, protective devices, bypass switch, filter circuits, and accessories as specified herein that will automatically maintain the continuity of electrical power within specified tolerance, without interruption, upon failure of the normal power supply.
- c) The UPS system shall be manufactured in a modular way so as to enable the power of the UPS system installed to be easily increased on the site by paralleling more than one module to meet the new operating requirements and the desired reliability. In this connection, transformation of unitary module into a multi-module configuration shall be able to be carried out directly on site without returning the equipment to the factory for modification and with a minimum installation down time.

### **7.10.2 Quality Assurance**

- a) UPS ratings shall be the final effective values after the application of all appropriate derating factors. These ratings shall be adjusted to suit local conditions, viz. maximum ambient temperature, etc.. Derating factor due to the non-linearity of the load to be connected to the UPS shall be taken into account.
- b) The UPS shall be manufactured for continuous reliable operating such that the "Mean-Time-Between-Failures" (MTBF) for individual modules of the UPS viz. Rectifier / charger unit, inverter unit and static switch, etc.. shall be more than 8760 hours.
- c) To ensure minimum down time, the "Mean-Time-To-Repair (MTTR) of the UPS shall not exceed one (1) hour. The MTTR shall be the time required to

diagnose the fault and restore the UPS to normal working condition, say by means of module replacement at site, but excluding the traveling time.

d) All battery use shall be heavy duty type of life span of minimum 5 years.

e) The factory acceptance test shall include the following as a minimum:

Full load and half load efficiency test.

Frequency and voltage limits over the whole range of load;

Overload voltage and short circuit protection;

Voltage and frequency regulation during sudden load application.

Overload performance

Instrument calibration

Output tests while being supplied for batteries only; and

Battery charging and discharging test.

#### 7.10.3 Submission

7.10.4 All technical submissions shall be approved by the Engineer in charge / Architect.

7.10.5 As a minimum requirement, the submission shall include the following:

Shop drawings showing the co-ordinated installation detail diagram

Client's works requirement;

Battery arrangement and manufacturer confirmation on 'zero' gas emission by battery to meet

Civil Defence requirement without separate room ventilation requirement.

#### 7.10.6 **System Operation**

The UPS system shall generally include its basic and supporting equipment for the monitoring, control and protection of the system, including input the output AC filters, electronic AC line conditioner, AC and DC input and output circuit breakers, converter, inverter, shielded isolation transformer, static by-pass switch and mechanical bypass switch. The battery bank may be in a separate matching battery enclosure (s).

7.10.7 Under normal conditions, power from the mains shall be supplied to the rectifier / charger unit. The rectifier / charger unit shall convert the incoming AC power to DC

power which is fed into the inverter unit and battery unit. The inverter unit shall convert the DC power to AC power, which is then supplied to the load through the static transfer switch. As long as the operable inverter unit is supplied with DC, it shall supply AC to the load.

- 7.10.8 Upon failure of the mains, the battery shall maintain the flow of DC to the inverter unit and the inverter unit shall continue to supply the load without interruption. Upon restoration of mains supply or when the generator supply is available, input power for the inverter unit and for the recharging of the batteries shall automatically be supplied from the rectifier / charger output without interruption. If the battery is exhausted before the availability of the mains or generator supply, the UPS system shall shut down automatically.
- 7.10.9 The static transfer switch shall normally connect the inverter output power to the load. Should the inverter malfunction, the static switch shall automatically transfer the load to the bypass source without interruption of the power supply to the load.
- 7.10.10 During periods when the UPS system is being serviced, the transfer switch shall be operated to transfer the load to the bypass source.
- 7.10.11 In the case of the parallel redundant system, the total system load shall be automatically distributed equally between the two UPS modules under normal conditions. Malfunction in one of the UPS modules shall cause instantaneous isolation of the faulty module from the system and the remaining healthy UPS module shall take over the full critical load without interruption. If both UPS modules fail, the critical load shall be transferred to the bypass source.
- 7.10.12 Functional Requirements
  - a) Contractor shall furnish On-Line Uninterruptible Power Supply (UPS) system of continuous duty of the ratings mentioned in Bill of Quantities. Each UPS shall give regulated filtered & uninterruptible power supply as described in the specifications.
  - b) Contractor shall note that the kVA ratings of the UPS systems shall be guaranteed at 45 deg.C ambient temperature. In case contractor's standard UPS KVA rating are based at a lower temperature, the contractor must consider a derating factor of atleast 1.5% per deg.C for arriving at the specified UPS capacity at 40 deg.C ambient temperature.

- c) In case the calculated /specified UPS capacity is not the same as one of the standard KVA ratings of the UPS manufacturer, the next higher standard KVA rating shall be selected. UPS of non standard rating shall not be acceptable.
- d) UPS system supplied by the contractor shall be the latest state of the art technology system fully digitalized using microprocessor controlled full wave rectification and IGBT inverter.
- e) Batteries shall be valve regulated lead acid specially meant for UPS application.
- f) Monitoring and control system shall also be state of the art technology LCD touch panel type providing all relevant data described in this document.
- g) The monitoring and control system shall be capable of RS232 input software for connecting to customer's computer system for data display and monitoring.
- h) All necessary components required for protecting UPS equipment and connected inputs and outputs shall be furnished by the Contractor as an integral part of the UPS system.
- i) The control logic power supply shall have redundant power supply AC input and the system battery as power sources.
- j) The UPS systems shall include but not be limited to the following equipment :
  - UPS system including 100% capacity float-cum-boost charger with 100% sealed valve regulated lead acid batteries with guaranteed battery life of 5 years.
  - Suitable factory built battery cabinet for housing the batteries, including terminal isolator / breaker and power disconnect device. The enclosure shall conform to IP 20 as minimum.
  - All cables, connectors, accessories like turning, cable trays, conduits etc. required for connection between battery and the UPS unit.

#### 7.10.13 Static Converter

##### General

The static converter (rectifier) shall be a multi-functional converter providing functions of power conversion, battery charging and shall have the additional functions of input power factor improvement and current harmonics reduction by PWM / IGBT filter. The converter equipment shall include all necessary control circuitry and device to conform requirements like voltage regulation, current limiting, wave shaping, transient recovery, automatic synchronization etc. as given below.

The converter shall be a solid state static PWM converter utilizing Intelligent Power Module (IPM) and shall include intelligent features like the drive circuitry, over current protection, over temperature protection, control power failure protection and short circuit protection.

The IPM transistors shall enable high speed switching at 6 KHz thus reducing the heat dissipation in the UPS and thereby providing high efficiency.

The PWM converter shall utilize the above and achieve unity power factor and reduce input current harmonics as given earlier and thus improve the overall power factor of the converter achieving input KVA savings.

During any step inverter load change (0-100%) the converter shall only supply 100% current to the inverter. The battery shall not be cycled at any time during this step load changes.

a) Input Current Limit

The converter logic shall provide input current limiting by limiting the DC output current. Two (2) line-side current transformers shall be employed as a means of sensing the current amplitude. The converter logic shall also be capable of providing auxiliary current limited when the logic is signaled to do so via an external dry contact closure (e.g. UPS fed from generator). The converter shall be capable of supplying overload current in excess to the full load rating. It shall also have sufficient capacity to provide power to a fully loaded inverter while simultaneously recharging the system battery to 95% of full capacity within 10 times the discharge time. The DC output current limit values shall be as follows:

Rectifier output current (maximum) 100% Note : 100% current shall be under the battery recharging mode.

### Battery Charge Current Limited

The converter logic shall provide current limiting function of battery charging to prevent the battery from damage. The following battery current limit and protection shall be provided.

- Battery charge current limit 10% of battery Ah rate.
- Over-current protection at 120% of above item.

### b) Voltage Regulation

The rectifier / charger output voltage does not deviate by more than +/- 1% of the nominal output voltage, due to the following conditions:

- From 0 to 100% loading.
- Rectifier input variations of voltage and frequency within the limitations set.
- Environmental condition variations within the limitations set.

### 7.10.14 Automatic Input Current Walk-in

The converter logic shall employ circuitry to allow a delayed and timed ramping of input current. Subsequent to energizing the converter input, the ramping of current shall be delayed by a maximum of 3 seconds. Upon starting the walk-in process, the ramping of current is timed to assume the load gradually within 1 through 60 seconds (every 1 second selectable).

### 7.10.15 Input Overload Protection

The A/C input fuses shall be provided at the converter input as a means of overload protection. The AC maximum current shall be controlled by the Converter.

### 7.10.16 Equalizing Charge Timer

The UPS logic shall provide an electronic automatic equalize charge timer which shall be selectable 24 hours for Lead Acid type or 8 hour for Alkaline type batteries. The timer circuit, once activated shall provide a high rate equalizing charge voltage to the system battery for the selected time. The circuit shall also be capable of manual activation via the LCD touch panel mounted on the front door. The level of equalizing voltage shall be equal to that stated by the battery manufacturer. Upon

completion of the timer count, the converter output voltage shall automatically return to the specified float voltage.

#### 7.10.17 Step Load Change

During any step inverter load change (0-100%), only the converter shall supply 100% current to the inverter. The batteries SHALL NOT be cycled at any time during these step load changes.

#### 7.10.18 Input Voltage

The converter shall be fed from the Normal Power Supply source.

#### 7.10.19 The converter shall meet the above specifications in addition to other requirements stated in Data Sheet.

##### Static Inverter

##### General

The static inverter shall be of solid state type using proven Pulse Width Modulation (PWM) technique. The inverter equipment shall include all necessary control circuitry and devices to conform requirements like voltage regulation, current limiting, wave shaping, transient recovery, automatic synchronization etc. as given below.

The inverter shall utilize Insulated Gate Bipolar Transistors (IGBT) or Intelligent Power Module (IPM) Transistors which shall provide intelligent features like the drive circuitry, over-current protection, over temperature protection, control power failure protection and short circuit protection.

The IGBT / IPM transistors shall enable high speed switching of 6 KHz thus reducing the heat dissipation in the UPS and thereby providing high efficiency.

The UPS shall utilize both Voltage and Current feedback control circuits so that the inverter shall act not only as a constant voltage source but also as a load required current source. This shall enable the inverter to quickly adapt to the changing load current value and wave shape.

#### 7.10.20 Voltage Regulation

The inverter output voltage shall not deviate by more than +/- 1% RMS due to the following steady state conditions:



- a) From 0 to 100% loading
- b) Inverter DC input voltage varies from maximum to minimum.
- c) Environmental conditions variations within the limitations.

#### 7.10.21 Frequency Control

The inverter output frequency shall be controlled by an oscillator internal to the UPS module logic. It shall be capable of synchronizing to an external reference (e.g. the bypass source or another UPS module) or operating asynchronously. The oscillator shall maintain synchronization with the external reference within the limitations set hereunder. The inverter shall operate on self run mode without synchronism if the bypass frequency exceeds the set value. The oscillator, while running asynchronously, shall maintain the frequency as  $50 \text{ Hz} + 0.01\%$  (or  $+ 0.005 \text{ Hz}$ ). Automatic adjustment of phase relationship between inverter output and standby bypass source shall be gradual at a controlled slew rate which shall be adjustable at the rate of 0.5, 1.0, 2.0, 3.0 Hz / second. (default 2.0 Hz / second).

The inverter output frequency shall not vary during steady state or transient operation due to the following conditions:

- a) From 0 to 100% loading.
- b) Inverter DC input varies from maximum to minimum.
- c) Environmental condition variations within the limitations.

#### 7.10.22 Output Voltage Harmonic Distortion

The inverter output shall limit the amount of harmonic content to the values as indicated in data sheets. The use of excessive or additional filtering shall not be required to limit the harmonic content thus maintaining a high level of efficiency, reliability and original equipment footprint.

#### 7.10.23 Output Overload Capability

The inverter output shall be capable of providing an overload current while maintaining rated output voltage to the values as indicated in data sheets. An LED indicator shall be located on the control panel to identify this condition. If the time limit associated with the overload condition expires or the overload is in excess of the

set current amplitude, the load shall be transferred to the bypass source without interruption.

#### 7.10.24 Inverter Current Limit

The inverter output shall be limited to 150% of rated load current. The two sensing locations shall operate separately and independently thus providing redundancy and, in the event of a failure, preventing unnecessary damage to power transistor components / fuses. Load current above 150% shall cause an immediate transfer of the load to the bypass source for fault clearing.

#### 7.10.25 Inverter Overload Protection

The AC output from the inverter shall utilize fuses for overload protection. The inverter shall utilize a contactor to isolate the inverter output from the critical bus.

The inverter fuses shall be the fast acting semiconductor type.

The inverter output isolation contactor shall be located in the UPS module and shall be controlled by the internal UPS module system logic.

The inverter shall meet the following specifications in addition to other requirements stated in Data Sheet.

#### 7.10.26 Built-in Isolation Transformer

This shall provide neutral separation which shall mean that output neutral will be independent of incoming neutral, hence critical load shall be isolated from the problems like incoming neutral open or, short or, variations in neutral to earth voltage due to sudden loading in neighboring installation.

#### 7.10.27 Reverse Phase Sequence Protection

In the event of Phase sequence reversal at the input, UPS system shall continue to work on the main power supply, or UPS systems shall go into battery mode, and shall not trip the UPS system.

#### 7.10.28 The overall efficiency of complete UPS system shall not be less than or equal to 94%

#### 7.10.29 Bypass And Static Transfer Switch

A bypass circuit shall be provided as an alternate source of power other than the

inverter. A high speed switch and wrap-around contactor shall be used for the critical load during automatic transfers to the bypass circuit. The static switch and wrap-around contactor shall drive power from an upstream bypass feed circuit breaker internal to the UPS module provided for overload protection. The wrap-around contactor shall be electrically connected in parallel to the static switch and shall at the same time as the static switch, energize and upon closure, maintain the bypass source.

The static switch shall only be utilized for the time needed to energize the wrap-around contactor thus increasing reliability. The bypass circuit shall be capable of supplying the UPS rated load current and also provide fault clearing current. The UPS system logic shall employ sensing which shall cause the static switch to energize within 150 microseconds thus providing an uninterrupted transfer to the bypass source when any of the following limitations shall exceed:

- a) Inverter output under voltage or over voltage.
- b) Overload beyond the capability of the inverter
- c) DC circuit under voltage or over voltage
- d) Final end voltage of system battery is reached.
- e) Bypass source present and available
- f) System failure (eg. Logic fail, fuse blown, etc.)

7.10.30 Keeping the above requirements in view, the static switch shall have the following minimum rating. Capacity continuous equal to 100% of continuous rating of the inverter. Capacity overload equivalent to overload characteristics specified for UPS.

Technical parameter are given in Technical Data sheet shall be followed.

7.10.31 Automatic Re-Transfer

In the event that the critical load must be transferred to the bypass source due to an overload, the UPS system logic monitors the overload condition and, upon the overload being cleared, perform an automatic re-transfer back to the inverter output. The UPS system logic shall only allow a re-transfer to occur three times within a ten minute period. Re-transfer shall be inhibited on the fourth transfer due to the likelihood of a recurring problem at the UPS load distribution. The re-transfer a load

to the inverter shall also be inhibited due to the limitations set.

#### 7.10.32 Manual Transfer

The UPS shall be capable of transferring the critical load to / from the bypass source via LCD touch panel. When performing manual transfer to inverter or automatic re-transfers, the UPS system logic shall force the inverter output voltage to match the bypass input voltage and then parallel the inverter and bypass source providing a make-before-break transition allowing a controlled walk-in of load current to the inverter.

#### 7.10.33 Maintenance Bypass Switch (MBS)

The UPS shall include as standard equipment, a zero energy maintenance bypass switch. Full UPS wrap-around enables personnel to do work inside the UPS module or maintenance bypass switchboard without danger from high voltage conditions.

#### 7.10.34 UPS Battery System

- a) The UPS system shall, as an integral part, provide battery system for 15 minutes (Full Load) standby capacity.
- b) The latest state of the art Valve Regulated Sealed Maintenance Free Lead Acid Batteries shall be used with a 20 hours discharge rating.
- c) The battery system shall be sized to provide 15 minutes back up time when the UPS is supplying 100% rated load at 0.8 load power factor.
- d) An ageing factor of 15% shall be applied to the capacity arrived at, to allow for compensation against capacity loss during float operation.
- e) The battery system design shall be provided with necessary devices to prevent deep discharge beyond recommended limits to prevent the batteries discharging beyond end cell voltage specified by the battery maker. The connections from battery to battery shall be by using copper bus bar strips and the entire battery system shall be used in IP20 steel cabinet enclosure and shall be similar to the UPS enclosure.
- f) All batteries shall be clearly identified and identification numbers marked on the batteries and a schematic diagram along with the complete calculations, including manufacturers supporting curves, shall be submitted with the tender.

#### 7.10.35 Operation

- a) Under normal operation, the UPS load will be fed from the Inverter with the bypass switch inhibited. The Converter, apart from providing DC power to the Inverter, also charges the battery under the float charge mode. The battery charge system shall have float charge, equalizing charge and recovery charge modes, to replenish the batteries self-discharging part while the battery is fully charged, equalizing the battery cell voltage to a constant value forcibly and recharging the battery system to the required values when the batteries have been used, respectively.
- b) The Inverter shall constantly monitor the AC source frequency and shall be in synchronization with the AC input source till the frequency of the AC input source is within synchronizing limit and if the frequency of the standby source exceeds the synchronizing limit the Inverter will work on its own internal oscillator maintaining an output frequency of 50 Hz  $\pm$  0.01% under all conditions of load. When the Inverter operates on its internal oscillator, it shall continuously monitor the frequency of the input source and when the input source frequency returns to within synchronization limit, the Inverter shall automatically synchronize itself with the input A/C source frequency and use it as a signal for Inverter output frequency control.
- c) Battery Operation:
- When the A/C input voltage drops below specified limits or in case of a power failure the Inverter continues to supply AC power of constant voltage and constant frequency utilizing the battery system as a power source until the input voltage returns to normal requirement. When the power supply is resumed or the input voltage returns to limits, the Converter shall automatically start and the load fed for normal operation status.
  - If the power failure continues beyond battery back up time or the battery voltage drops to the final discharge voltage, the Inverter should automatically stop and at the same time transferring the load to the bypass circuit. On resumption of power supply, the Converter shall automatically re-start the operations and charge the batteries whereas the Inverter should inhibit automatic start and should be started manually.

#### 7.10.36 Bypass Operation:

When power is supplied from the Inverter in synchronization with the bypass, it shall accomplish the following:

- a) When the UPS output current reaches overload status it shall automatically transfer the load to bypass circuit with no interruption and when the overload status is cleared it automatically re-transfers the load to Inverter.
- b) When the battery final discharge condition is reached, the load shall automatically be transferred to the bypass circuit without interruption.
- c) In case of failure of the UPS, the load shall be automatically transferred to the bypass circuit with no interruption and when the failure is cleared, re-transfer the load to the Inverter shall be done manually.
- d) There should be provision made in the system to prevent, when necessary, asynchronous transfer.
- e) When the UPS goes on bypass mode in any of the conditions described above and if at that time there is no bypass power supply available due to power failure, the UPS shall remain in standby mode and as soon as the bypass power supply is available will transfer the load to bypass.
- f) A maintenance bypass transfer switch shall be provided with lock and key arrangement and should be manually done by authorized personnel only.

#### 7.10.37 Cabinet And Enclosures

- a) The entire UPS system, including all components like inverter, static switch, maintenance bypass, shall be housed in free-standing steel type factory-finished enclosures complying with the protection standards of IP20. The enclosure shall be open able using a special tool for internal access. The colour shall be light grey.
- b) Ventilation

Forced air-cooling shall be provided to allow components to operate within their rated temperature specified. The cooling fans shall have thermal relays protection using a latched cut fire re-setting, as a protection for the cooling fans.

Similarly, the backup battery system shall also be housed as described earlier in an

IP20 cabinet.

#### 7.10.38 Control And Monitoring

- a) The UPS shall utilize state of the art full DDC control software driven Control and Monitoring System. For UPS less than 40kVA software of lower version may be given.
- b) It shall be provided with LED displays. The display system shall have, as a minimum individual LEDs with different colours for the following:
  - Load on Inverter
  - Battery operation
  - Load on Bypass
  - UPS failure
  - LCD failure
  - Overload
- c) The UPS logic should provide one set of normally open dry contact / relay output to allow interfacing of UPS operating status to an external system and should be capable of providing, as a minimum, 10 numbers status and, should the UPS manufacturer's standard product does not provide such software, the bidder must add additional equipment and cost for the same.
- d) The UPS shall also have an RS232 port for interfacing to BAS system or client's centralized computer network.

#### 7.10.39 LCD touch panel

- a) The UPS shall be provided with a operator friendly large scale LCD touch panel.
- b) The LCD touch panel shall also include graphic measurement display, operational procedures of each activity, fault status display and also have capability to record at least 50 faults.
- c) The touch screen panel shall clearly define specified areas for operational function, execution and message display.

- d) It should be possible to operate the entire UPS system and its components and obtain all measurements and data through the touch screen operation. The measurement software should provide capability to measure phase voltage, current in each phase, frequency, power factor, available battery time etc.
- e) Under all operating conditions, the system software should have capability for displaying fault alarm automatically. The tenderer should describe in detail the faults that would be displayed under this mode.

#### 7.10.40 UPS Testing

- a) The Contractor shall perform the following tests, as a minimum, at site prior to handing over, to confirm the functional and the performance specification of the UPS as specified. All required test equipment like Digital Oscilloscope, Voltage Regulator, Measurement Meters, required artificial load etc. shall be the responsibility of the Contractor without any additional cost.
- b) The Contractor shall demonstrate as a minimum the following features on site by providing all required test equipment, such as power factor improvement, input current THD, output voltage THD, output frequency and all other performance monitoring requirements detailed before as required by the Owner. Warrantee/ guarantee certification shall be submitted by Contractor.
- c) Testing procedure is to be given by vendor and approved by Engineer incharge.



## **7.11 LIFTS**

### **7.11.1 General:**

These specifications are intended to cover the complete installation of the elevator plant in the first class work men like manner and include all work and material as specified. Any item not mentioned in the detailed specifications but required to be provided stands included in the contract amount and nothing extra shall be payable for that. The work shall conform to latest amendment upto date IS or relevant code.

### **7.11.2 Standards:**

The latest BIS Standards and Codes of Practice with upto date amendments shall apply to the equipment and the work covered by this contract.

The tenderers shall also take into account local and State regulations as in vogue for the design and installation of lifts.

Wherever appropriate latest upto date Indian Standards are not available, relevant latest upto date British and /or IEC Standards shall be applicable. BIS certified equipment shall be used as a part of the Contract.

### **7.11.3 Driving Mechanism:**

### **7.11.4 Brake:**

The electromagnetic brake shall be spring applied and electrically released. It shall come into action after the elevator has come to a complete halt to hold the car in position. The brake shall operate automatically with the safety devices and failure of the mains. It shall be released electrically. It shall be possible to release the brake manually – such release requiring the action of manual force to move the elevator in short stops.

### **7.11.5 Control:**

The elevators shall have state of art microprocessor based AC variable voltage variable frequency (ACVVVF) drive. Two elevators adjacent to each other in one location shall be provided with Directional Collective/Selective Control for two cars with Group Supervisory Control. The control system shall regulate dispatching of individual cars and shall provide service to all floors as different traffic conditions arise minimizing unproductive factors. The system shall respond automatically to UP and DOWN peak, balanced or light traffic etc. Complete detail of these features shall be furnished alongwith the tender. Some of the technical parameters required are innumerate below. Tenderers shall categorically confirm their compliance or otherwise in the tender.

- a) Starting Current - 1.2 – 1.5 time full load running current
- b) Leveling accuracy -  $\pm 3$  mm
- c) Acceptable Voltage Fluctuation - + 10 to -10%
- d) Rate of acceleration/deceleration ( $M/S^2$ ) - 0.6 – 1.5 (Adjustable at site)
- e) Maximum jerk ( $M/S^3$ ) - 0.7 – 1.5 (Adjustable at site)
- f) Maximum vibration in car horizontal/vertical - 20/18 dBA
- g) Maximum noise level in car during travel - 48 dBA
- h) Maximum noise level in machine room/machine room less at 1 mtr from machine - 62 dBA
- j) Maximum door noise level while closing and opening at a distance of 1 mtr from car door - 52 dBA

The controller shall be wall/floor mounted, vertical, totally enclosed cubicle type with hinged doors on the front and the rear to provide easy access to all components in the controller. The cubicle shall be well ventilated such that the temperature inside never exceeds the safe limits of the components at ambient room conditions in the machine room.

The controller shall operate within the supply voltage variation of plus 10% to minus 20% of the nominal voltage. An inbuilt voltage stabilizer shall be provided in the controller for the purpose.

The controller shall be complete with relay protection against the following:

- a) Over current
- b) Under voltage
- c) Single phasing
- d) Phase reversal
- e) Earth leakage
- f) Over voltage

The controller shall be designed to cut off the power supply, apply the brake and bring the car to a rest in the event of any of the above failures occurring.

The tenderer shall state clearly the form of protection provided for each equipment.

If any devices of the electro mechanical type are used the same shall be equipped with arc chutes to prolong the life of contacts. Tenderers shall stipulate the type of devices used and the material of the contacts.

Tenderer shall support their offers with complete details of experience, number of elevators installed and operational in India, collaboration for equipment design and manufacture etc.

#### 7.11.6 Car Enclosure

The elevator car enclosure including car door, hoistway doors and return panel shall be with stainless steel Grade 304. Height of the enclosures shall be as specified in

technical datasheets. The enclosure shall have hard wood flooring recessed by 25mm to enable Owners to provide floor finish of their choice. The weight to be allowed for flooring shall be 200 kg. for passenger elevator. Enclosure shall have acrylic ceiling with indirect lighting or standard design of ceiling as approved by Project Manager. The enclosure shall have fixtures and fittings including provision of car ventilation as detailed in technical parameters.

#### 7.11.7 Doors

#### 7.11.8 Car Door:

The car entrances for elevators shall be protected by automatic power operated, center opening (or specified in technical datasheets) with stainless steel Brush finish or as specified in the technical data sheets as per standard manufacture of respective manufactures (details to be furnished alongwith the tender).

#### 7.11.9 Hoistway Landing Doors:

The hoistway landings for elevators shall be protected by automatic power operated, center opening door (or specified in technical datasheets) with stainless steel Brush finish as per standard manufacture of respective manufacturers (details to be furnished alongwith the tender). For specific requirement please refer technical datasheets.

#### 7.11.10 Car & Hoistway Door Protection:

A multiple infra red cell electronic door detector shall be provided to regulate the closing motion of the doors for entry of the passengers. When a person is entering the car while the doors are closing the detector shall sense the same and hold the doors to permit entry. For specific requirement please refer technical datasheets.

#### 7.11.11 Car & Hoistway Door Operation:

The equipment shall be complete with electric door operator for opening and closing of Car & Hoistway landing door. The equipment shall consist of a motor on the elevator car to operate the door when the car is stopping at a landing. The car & hoistway doors shall be mechanically connected such that both move simultaneously for opening and closing.

The hoistway landing door shall be provided with an interlock such that.

- a) It shall not be possible for the car to be started or kept in motion until all the landing doors and the car door are locked in the closed position.

- b) It shall not be possible to open the landing door from the landing unless the elevator car is within the particular landing zone.
- c) The car doors & hoistway landing doors open automatically as the car is stopping at a landing. The closing of the car and landing door must occur before the car is set in motion.

#### 7.11.12 Door Hangers and Tracks:

The car and the landing doors shall be provided with two point suspension sheave type hangers complete with tracks. Sheaves and rollers shall be steel with moulded nylon collar and shall include shielded ball bearings. Tracks shall be of suitable steel section with smooth surface. The landing doors shall be complete with headers, sills, frames etc. as required.

#### 7.11.13 Cabin Fan:

A Noiseless pressure fan or blower shall be provided in the elevator cabin with supply grill matching with the interior of the car. For specific requirement please refer technical datasheets.

#### 7.11.14 Emergency Lights:

In addition to normal lighting an emergency light unit using sealed Nickel/Cadmium Maintenance free battery power pack with charger and fluorescent lamp to operate automatically and to illuminate the car for minimum 30 minutes in case of power failure shall be provided in each elevator car.

#### 7.11.15 Automatic Rescue Device:

Each elevator shall be provided with an electronic state of art Emergency Battery Drive for automatically rescuing trap passengers from the elevator during power failure. The rescue device shall automatically bring the elevator car to the nearest landing and open the door so that the trapped persons can walk out of the elevators. The elevators shall resume normal operation on restoration of power supply. For specific requirement please refer technical datasheets.

#### 7.11.16 Operation Buttons And Indications:

The following operation buttons and indications shall be provided:

In each Elevator Car:

Stainless steel panel of suitable thickness flush mounted shall be provided on one side of the door having:-

- a) LED Illuminated push buttons of micro pressure type corresponding to the floors served.
- b) Door open and door close button.
- c) Emergency stop button.
- d) Emergency alarm button.
- e) Two position key operated switch for 'with attendant' and 'without attendant' operation.
- f) Ventilation fan ON/OFF switch with auto OFF when there is no call after 120 seconds.
- g) Built in intercom of the hands free type as well as space for providing EPABX telephone instrument and 5 pair telephone trailing cable to communicate from car to machine room receiver and car to Central Monitoring Station (at remote location) and vice-versa.
- h) Dynamic car direction display
- i) Car position indicator
- j) Audio/Visual overload warning indicator
- k) Digital car temperature indicator
- l) Digital voice synthesizer for announcing special messages with background music shall be quoted.
- m) Non stop button (Only during attendant mode)

#### 7.11.17 At Landings:

##### Terminal Landings

LED illuminated type up down push buttons with travel indication arrow in satin finish stainless steel facia plate.

Digital car position indicator with gong in stainless steel facia plate.

##### Intermediate Landings

Two LED illuminated type up down push buttons with travel indication arrow in satin finish stainless steel facia plate.

Digital car position indicator with gong in stainless steel facia plate.

For specific requirement please refer technical datasheets.

#### 7.11.18 Safety Devices:

All safety devices statutorily required by Elevator Inspector, including but not restricted to the following shall be provided:

**Terminal and Final Limits:**

Terminal limit switches shall be provided to slow down and stop the car automatically at the terminal landings, and final limit switches shall be furnished to automatically cut off power should the car travel beyond the terminal landings.

**Interlocking:**

Adequate interlocking is to be provided so that the car shall not move if the landing doors are even partially open and also the elevator is overloaded.

**Car Safety and Governor:**

The car safety shall be provided to stop the car whenever excessive descending speed is attained.

**Emergency Stop Switches:**

An emergency stop switch for use by maintenance personal shall be provided in each elevator car.

**Self Leveling:**

The elevators shall be provided with self leveling features of  $\pm 3\text{mm}$  accuracy.

**Fireman Switch:**

Each Elevator shall have a Fireman switch with glass from for access by the Fireman. The operation of this switch shall cancel all calls to this elevator and will stop at the next nearest landing if traveling upwards. The doors will not open at this landing and the elevator will return to the ground floor. In case the elevator is traveling downwards when the fireman's switch is operated it will go straight to the ground floor bypassing all calls enroute. The emergency stop button inside the car shall be rendered inoperative.

**7.11.19 Safety Items:**

Following safety items shall be provided in each machine room; Contractor to cover the cost of these items in his quoted rates, nothing extra shall be paid on this account.

First Aid Box

Fire buckets

Danger Plates

Any other safety item that may be required by authorities.

The car rails should be 'TEE' section, duly machined, tongued and grooved. Counter weight rails shall be 'TEE' section, duly machined, tongued and grooved. The guide rails shall have sections, the properties of which shall comply with the requirement of the relevant IS code. The guides shall be capable of withstanding forces resulting from the application of the car or counter weight safety devices.

The suitable heavy duty spring buffers shall be placed below the car and counter weight but in the pit & arranged to sustain any shock, should the lift over travel past the terminal limits. Buffers shall be mounted on RCC foundation blocks. Dowels for the purpose shall be left while casting the pit floor alternatively floor reinforcement could be exposed by chipping for welding additional reinforcement for dowels.

These will be self lubricated, round standard steel wire ropes manufactured from high grade steel and special flexible material and shall conform to the relevant Indian Standards. The number and size of the hoistway ropes shall be so selected that it have the combined breaking strength calculated with a minimum factor of safety of 10 times the combined weight of car with full load and also have adequate traction for the elevator. The governor ropes shall also be wire ropes.

The sills to be provided should be aluminium grooved, with self supporting sill M.S. angle of adequate size.

#### 7.11.20 AC Motor:

The make, type and capacity of hoisting motors should be mentioned. The motor should be suitable for elevator service (S4 duty) with high starting torque & low starting current. Thermistor shall be embedded in starter windings to indicate the temperature rise in the motor.

#### 7.11.21 Electric Power:

The available system of electric supply is 415 Volts +10% -10% between phases and 240 Volts between phase and neutral – 3 phase, 4 wire AC 50 Hz system. In addition, for illumination and control, power at 240 volts AC single phase 50 Hz shall also be available. Any equipment/ component operating at other than the above mentioned power supply shall be provided with necessary transformers/voltage stabilizers. The amount of power required for elevators shall be indicated in the tender. Power shall be provided at one point in each Machine Room at a point to be indicated by the tenderer. All subsequent electrical systems shall be the responsibility of the tenderer.

#### 7.11.22 Alarm Bell:

A butterfly operated emergency alarm bell, including wiring to be provided and connected to a properly marked push button in the car operating panel. The alarm bell shall be located at the ground floor, at the floor landing outside and adjacent to hoistway or as desired by Project Manager.

The alarm unit shall be solid-state siren type, operated by Nickel/Cadmium maintenance free batteries to give a warning siren when the alarm button in the car is pressed momentarily.

#### 7.11.23 Hoistway Gate Interlocks:

Each Hoistway gate shall be provided with an approved interlock and which shall prevent the movement of the car away from the landing unless all gates are closed and locked. The interlock shall also prevent opening of gate except at the landing where the car is stopping or has stopped.

#### 7.11.24 Counter Weight:

The counter weight shall be made of cast iron and consist of structural steel frame which shall travel between rigid guides and also shall be capable of withstanding buffer impacts. The counter weight shall have weight equal to that of the complete elevator car and approximately 50% of the contact load. Suitable metallic counter weight guard of required length shall be provided at the bottom of the hoistway.

#### 7.11.25 Hitches Plates:

Self aligning hitches plates of better roping shall be provided.

#### 7.11.26 Traveling Cables:

Fire proof compound coated traveling cable shall be used and shall conform to IS:4289 - 1967 with latest amendment. The firm can also use flat traveling cables (imported only) with the approval of the consultant.

#### 7.11.27 Guide Rails Shoes:

To prevent car shaking automatic adjustable guide rails shoes should be used. The firm should use teflon guide ribs on lubricated guide rails.

#### 7.11.28 Reverse Phase Relay:

Reverse phase relays should be provided on the controller which should be designed to protect the lift equipment against phase reversal and single phasing and phase failure.



#### 7.11.29 Controller:

Single automatic push button control shall be used. The design of the controller should be such that it can be mounted on a wall and is dust protected, providing sufficient protection against lizards, rodents etc.

#### 7.11.30 Technical Parameters:

The following technical parameters give requirement of various parameters of passenger elevators. Tenderers shall fill in their item wise confirmation/comments in the column provided for the purpose in this annexure. Deviations, if any, from tender requirements shall be clearly brought out in this annexure, failing which it shall be presumed that the offer conforms to the tender requirements fully. Tenders in which these technical parameters are not duly filled in by the tenderers are liable to be summarily rejected.

Note: Wall of Lift enclosure shall be rated for 2 hrs fire rating and shall have vent at the top of area not less than 0.2 sqmtr. Car doors shall be fire rated for not less than 1 hr.

## **7.12 LIST OF ACT / BYE LAWS**

The installations shall also be governed by the following Acts/Bye-laws/Codes as amended upto date in addition to the codes specified in the tender:

- a) ANSI/ASME/CENEN 81 CODE
- b) National Building Code of India - 2005
- c) Energy Conservation Building Codes 2007
- d) Relevant Codes of Bureau of Indian Standards
- e) NEC - NFPA 70, National Electric Code.
- f) Relevant Codes of National Fire Codes 2008

### **NOTE:**

- Equipment, accessories, component parts, raw materials and tests shall in general conform to IS AND IEC.
- Latest edition of above mentioned codes / Bye Laws / Act shall be referred

### **7.13 SPARES AND MAINTENANCE TOOLS AND TACKLES**

#### **7.13.1 GENERAL**

- a) All spares and maintenance tools and tackles shall be designed to enable maintenance to be carried out in the least time and at the least cost and support resources without affecting the performance and safety aspects.
- b) For all major equipment including pumps, fans, drives, heat exchangers and large valves etc., appropriate structural steel members shall be provided for mounting various handling devices which are necessary for the dismantling and re-assembly of the equipment components during maintenance.
- c) All the spares and maintenance tools and tackles supplied shall be new and unused.
- d) The VENDOR/CONTRACTOR shall guarantee that before going out of production of spares and maintenance tools and tackles for the equipment furnished, he shall give at least 12 months advance notice to the PURCHASER, so that the latter may order his requirement in one lot, if so desired.

#### **7.13.2 SPARES**

The BIDDER shall include the following three (3) categories of spares in his scope of supply.

- a) **START-UP AND COMMISSIONING SPARES**

Spares required for start-up and commissioning of the equipment, plant or system shall be indicated by the BIDDER in 'Schedule of Start-up and Commissioning Spares'. Total value of such spares shall be included in the quoted price for supply or erection of the equipment, plant or system. No additional amount is payable to the CONTRACTOR for equipment, plant and system for which erection and commissioning is in the CONTRACTOR's scope..

- b) All spares supplied shall be strictly inter-changeable with the parts for which these are intended to be replacements. The spares shall be treated and packed for long term storage under the climatic conditions prevailing at the site e.g., small items shall be packed in sealed transparent plastic bags with desiccator packs as necessary.
- c) Each spare shall be clearly marked or labelled on the outside of its packing with its description and purpose. When more than one spare is packed in a single case, a general description of the contents shall be shown on the outside of such case and a detailed list enclosed. All cases, containers and other packages shall be suitably marked and numbered for the purposes of identification.

#### **7.14 Approved Make of Electrical Component/Equipment:**

**NOTE:** LIST OF APPROVED MAKES FOR PRODUCTS AND MATERIALS FOR ELECTRICAL WORKS ARE INDICATED IN THE TABLE BELOW. HOWEVER, ANY OTHER MAKE WHICH IS EQUIVALENT AND MEETING THE TENDER SPECIFICATIONS ARE ALSO ACCEPTABLE WITH PRIOR APPROVAL OF THE ENGINEER.

| Sl. No. | Item                   | Sub-Vendor's Name                                                                                                  |
|---------|------------------------|--------------------------------------------------------------------------------------------------------------------|
| 1       | DG Sets                | M/s Kirloskar Electric Co.Ltd.<br>M/s Crompton Greaves Ltd<br>M/s Sudhir<br>M/s Bharat Bijlee<br>M/s Jyoti Limited |
| 2       | Control & Relay Panels | M/s Areva<br>M/s Siemens,<br>M/s ABB,<br>M/s Easun Reyrolle                                                        |
| 3       | Protective Relays      | M/s ABB<br>M/s Schneider Electric<br>M/s L&T<br>M/s GE<br>M/s Siemens<br>M/s Areva T&D<br>M/s Easun Reyrolle       |
| 4       | Current Transformers   | M/s Pragati<br>M/s Jyoti<br>M/s Kappa<br>M/s Ind Coil                                                              |
| 5       | Voltage Transformers   | M/s Pragati<br>M/s Jyoti<br>M/s Kappa<br>M/s Ind Coil                                                              |
| 6       | LT panels / LV         | M/s Schneider Electric                                                                                             |

|    |                                                   |                                                                                                                            |
|----|---------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
|    | Switchgears & Control gears                       | M/s ABB<br>M/s. Siemens<br>M/s GE<br>M/s L&T                                                                               |
| 7  | Lighting Fixtures and Accessories (LED/T5)        | M/s Bajaj Electricals<br>M/s High Beam<br>M/s Philips<br>M/s Havells<br>M/s Wipro<br>M/s Osram<br>M/s Lumileds<br>M/s Cree |
| 8  | Emergency Lighting Fixtures                       | M/s Prolite or equivalent.                                                                                                 |
| 9  | LDB's, UPSDB's, MCB's, RCCB's                     | M/s Indo Kopp<br>M/s Legrand<br>M/s L&T<br>M/s Siemens<br>M/s Schneider                                                    |
| 10 | Switches , Plugs, Sockets, Switchbox, Receptacles | M/s Anchor (Panasonic)<br>M/s Anchor (Roma / Ave)<br>M/s Legrand<br>M/s Havells / M/s Crabtree<br>M/s Schneider            |
| 11 | 1.1kV Cable termination                           | M/s Raychem<br>M/s Mahindra<br>M/s REPL Engineering Ltd.<br>M/s 3M<br>M/s ABB Kabeldon                                     |
| 12 | Selector switches                                 | M/s Kaycee<br>M/s Siemens<br>M/s Kraus & Naimer                                                                            |

|    |                                             |                                                                                           |
|----|---------------------------------------------|-------------------------------------------------------------------------------------------|
|    |                                             | M/s GE Power controls<br>M/s L&T<br>M/s ABB<br>M/s Schneider Electric                     |
| 13 | LED Indicating Lamps                        | M/s Teknic<br>M/s Vaishno<br>M/s Siemens<br>M/s Mathura Switchgears Pvt.Ltd               |
| 14 | Terminal Block                              | M/s Elmex<br>M/s Connectwell                                                              |
| 15 | Control fuses                               | M/s Siemens<br>M/s GE                                                                     |
| 16 | Push Button                                 | M/s Siemens<br>M/s L&T<br>M/s Teknic,<br>M/s Mathura Switchgears Pvt.Ltd<br>M/s Schneider |
| 17 | Meters (Ammeter, Voltmeter)                 | M/s AE<br>M/s Meco<br>M/s Enercon<br>M/s IMP                                              |
| 18 | Cable Trays                                 | M/s Indiana<br>M/s Patni<br>M/s Reliance<br>M/s Sadhana                                   |
| 19 | Digital Multifunction Meters / Load Manager | M/s Rishabh<br>M/s Secure<br>M/s AE<br>M/s Conzerv<br>M/s Enercon                         |
| 20 | LT Power Cables and Wires                   | M/s Universal Cables Ltd.<br>M/s NICCO                                                    |

|    |                            |                                                                                                                                            |
|----|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
|    |                            | M/s KEC International Ltd<br>M/s Cable Corporation Of India Ltd<br>M/s Finolex<br>M/s INCAB<br>M/s Polycab<br>M/s LAPP<br>M/s RR Kabel     |
| 21 | LT Cable Lugs              | M/s Dowells<br>M/s Jainson<br>M/s Comet                                                                                                    |
| 22 | LT Cable Glands            | M/s Braco<br>M/s Dowells<br>M/s Hex<br>M/s Comet                                                                                           |
| 23 | Batteries                  | M/s Amara Raja Batteries Ltd<br>M/s Exide Ltd<br>M/s Standard Batteries Ltd<br>M/s Sherene Electro Controls<br>M/s Amco Power Systems Ltd. |
| 24 | UPS                        | M/s Emerson<br>M/s DB Power Electronics<br>M/s Hi Rel Electronics Pvt.Ltd<br>M/s Enercon Systems Pvt Ltd.<br>M/s APC Schneider             |
| 25 | Sandwich Busduct           | M/s Entraco<br>M/s C&S Protection & Control Ltd<br>M/s M.K. Engineers<br>M/s Godrej<br>M/s Schneider<br>M/s Legrand                        |
| 26 | Lighting poles & High-Mast | M/s Bajaj<br>M/s India Electric Poles Manufacturing co.                                                                                    |

|    |              |                                                                      |
|----|--------------|----------------------------------------------------------------------|
| 27 | Contactors   | M/s L& T<br>M/s Siemens<br>M/s Schneider-Telemecanique               |
| 28 | Ceiling fans | M/s Bajaj<br>M/s Crompton<br>M/s Usha<br>M/s Havells<br>M/s Orient   |
| 29 | PVC Conduits | M/s Precision<br>M/s VIP<br>M/s Avon                                 |
| 30 | Exhaust fan  | M/s Nadi<br>M/s Almonard<br>M/s Bajaj<br>M/s Crompton<br>M/s Havells |
| 31 | Lift         | M/s OTIS<br>M/s Johnson<br>M/s Kone                                  |
| 32 | APFC Panel   | M/s Epcos<br>M/s Aswani<br>M/s Manohar Brothers                      |



**TECHNICAL SPECIFICATION**

**IBMS AND IT WORKS**

## **IBMS & IT WORKS**

### **8.1.BUILDING MANAGEMENT SYSTEM**

#### **8.1.1 Scope of work**

- 8.1.1.1. This specification covers the requirement for design, engineering, manufacturing, testing at Vendor's/Sub-Vendor's works, supply, packaging, forwarding, delivery at site, unloading from carriers, storage at site, transport to site, loading, unloading, installation, commissioning, carrying out performance guarantee / acceptance tests at site of field instruments and Integrated Building Management System (IBMS).
- 8.1.1.2. The BIDDER shall be a recognised leader in integration of IBMS system and capable of supplying all necessary support services including hardware & software support, configuration services, system installation, commissioning & maintenance support. At least One- (1) no. of similar installations of the IBMS offered by the BIDDER should be in continuous operation for a minimum period of one year.
- 8.1.1.3. Microprocessor based Integrated Building Management System (IBMS) with functions distributed both geographically and functionally over the field controllers shall be provided. IBMS shall comprise of Direct Digital Controllers (DDC), IBMS server and IBMS operator station. The field instruments for HVAC system shall be supplied, installed, monitored and controlled by the vendor.
- 8.1.1.4. HVAC system, the Fire Detection & Alarm System (FDAS), Access Control System (ACS), CCTV system, DG sets, UPS, Energy meters and all other utilities and systems as Fire Fighting System shall be integrated with the IBMS system, monitored and controlled from Fire Command Centre room located at First floor in the Administration block.
- 8.1.1.5. It is not the intent to specify completely herein all details of design and construction of equipment or materials to be supplied or of services to be rendered. However, the equipment, materials and services shall conform in all respects to high standards of engineering design, workmanship and be capable of performing in continuous commercial operation in a manner acceptable to PURCHASER who shall interpret the meaning of drawings and specifications and shall have the power to reject any work or material which in his judgement are not in full accordance therewith.

#### **8.1.2 Codes and Standards**

- 8.1.2.1. All equipment, systems and works covered under this specification shall comply with all currently applicable statutes, regulations, standards and safety codes in the locality where the equipment shall be installed.
- 8.1.2.2. In particular, the following standards are applicable
  - BIS : Bureau of Indian Standards
  - IEC : International Electrotechnical Commission
  - NEC : National Electric Code

NEMA : National Electrical Manufacturer's Association

NBC: National Building Code

GRIHA : Green Rating for Integrated Habitat Assessment

8.1.2.3. Other national standards established to be equivalent or superior to the codes and standards specified are also acceptable. The BIDDER shall furnish English translation of all standards specified in this specification.

8.1.2.4. In the event of any conflict between the codes and standards referred to in the specification and the requirements of this specification, the more stringent of these requirements shall govern.

8.1.2.5. Unless indicated otherwise, all codes and standards referred to in this enquiry specification shall be understood to be the latest version on the date of offer made by the Bidder.

### **8.1.3 System Description**

8.1.3.1. Integrated Building Management System (IBMS) shall be a microprocessor based system with functions distributed both geographically and functionally over the field controllers. IBMS shall be PC based system allowing full seamless integration of following:

- a) Energy Management.
- b) Utility Services such as Water Treatment Plant, fire fighting system etc,
- c) DDC/Converters for Software Integration
- d) DDC's for Ventilation system
- e) Fire Detection & Alarm System
- f) Access Control System (ACS)
- g) DG set
- h) CCTV system
- i) Uninterruptible Power Supplies (UPSs)
- j) Lift Monitoring

All the above systems shall be integrated and monitored from the IBMS supervisory workstations.

8.1.3.2. IBMS server will be placed in the server room located at Second floor in the Administration block whereas workstations will be placed in the server room located at Fire command centre, First Floor in the Administration block.

8.1.3.3. Building Management System DDCs shall have facility to connect any standard analog and digital Input / Outputs. Such as 4 to 20 mA, 0 to 10V, RTD and potential free contacts. 20% of used channels installed / wired spares shall be provided while sizing / selecting the DDCs. Energy Management functions such as duty cycling and optimisation for controlling AC&V equipment shall be done in optimum manner.

8.1.3.4. The supply & installation of the DDCs is in the BIDDER's scope.

- 8.1.3.5. These DDCs shall be interfaced with the IBMS system over MODBUS/LON/BACNET protocol and necessary hardware & software required in IBMS for interface shall be provided by the bidder.
- 8.1.3.6. Also the communication cables for interfacing the DDCs to IBMS system shall be provided by the bidder.
- 8.1.3.7. DDC shall have the following software features as minimum:
- 8.1.3.8. Energy management and Control Programs and Associated Data files shall be in non-volatile EEPROM or power-backed RAM memory.
- 8.1.3.9. Each DDC shall contain up to 10 unique User modifiable time programs (TP). Each TP shall consist of daily, weekly and annual programs plus a “TODAY” temporary function.
- DAILY Programs shall be definable for day types such as working day, half day, holiday, weekend etc. Each daily program shall allow a list of time based Analog and Digital commands to be used to user selected plant elements and points.
- WEEKLY programs shall allow a user selected set of daily programs to be defined for each day of the week (MONDAY through SUNDAY).
- The ANNUAL program shall initially be an Automatic Compilation of 52 weekly programs. Selecting a date of the ANNUAL Program shall allow modification of the daily selection entered into the weekly program (such as changing JAN 26 from working day to a Holiday).
- 8.1.3.10. Control Application Software for DDC shall be customised strictly to meet the detailed requirements of the ‘Sequence of Operation’ specified.
- 8.1.3.11. Initial Software shall be fully modifiable, and not restricted by Vendor’s Specific Configuration guidelines.
- 8.1.3.12. All DDC control software shall be designed via a graphic programming facility.
- 8.1.3.13. IBMS Software shall include the following as minimum features:
- a) Microsoft Windows-based operating system.
  - b) User Friendly Graphical interface providing a complete overview of all the systems connected to the IBMS system. The graphics should be universally understood.
  - c) Seamless Integration of the various systems provided in the plant
  - d) Measured values, operating status of drives displayed in real time
  - e) Facility to be provided to the operator to adjust Set point from screen.
  - f) Alarms displayed in real time, can be acknowledged & reset by operator from screen
  - g) Time Scheduling – Time programmes shall ensure that HVAC & lighting are switched off automatically at the end of the day & during holidays. Apart from a 7-day programme, exception programmes shall also be made as required
  - h) Historical Trending

- i) Report Generation – Provides a snapshot of the systems at any specific time or when specific events occurred.
- j) Access of viewing to only authorised users by provision of password at various levels.
- k) Separate screens shall be developed for operation and monitoring of each system. IBMS shall have capability to develop minimum 250 nos. of screens.
- l) Facility shall be provided to monitor and control all the systems from any IBMS operator station.
- m) Facility shall be provided to configure the software for any addition / deletion of data from any IBMS operator station.
- n) General arrangement drawings and architectural drawings for each building will be made available to the CONTRACTOR by client. CONTRACTOR shall develop complete 3D view of the buildings displaying location of each equipment such as VRF's, cameras, access controlled doors, DG sets, stores, receptions etc.

#### **8.1.4 System Specification**

##### **8.1.4.1. Air Conditioning**

###### **a) Variable Refrigerant Flow System (VRF)**

Variable Refrigerant Flow System is monitored and controlled through soft integration using RS 485/MODBUS communication. There shall be total two nos. of VRF controllers for New Admin Block.

- Time scheduled based operation
- Remote start/stop of each VRF unit through BMS.
- Monitor the status of each VRF unit through BMS and keep a log of the number of hours run.
- Monitor the space temperature through BMS & give an alarm for a high/low space temperature.
- Monitor relative humidity in seven no. of specialized labs. 3 Step Electric Heater shall be start/stop to maintain room humidity level within 35%RH - 65% RH.

###### **b) Scrubbers**

There shall be total one no. of scrubbers for Kitchen.

- Time scheduled based operation
- Start/stop of each fan through BMS.
- Monitor the status of each fan through BMS and keep a log of the number of hours run.

##### **8.1.4.2. Electrical System**

- a) Monitor two nos. of Incoming medium voltage breaker (HT) status
- b) Monitor two no. of outgoing low voltage breakers (LT) status. Keep provision for monitoring of one no. of outgoing low voltage breakers (LT) status for future.
- c) Tentatively 8 nos. of energy meters will be provided. However exact quantity and location will be finalised during detail engineering.

The Supply and installation of above system is not in the bidder's scope.

These energy meters shall be interfaced with the IBMS system over MODBUS/LON/BACNET protocol and necessary hardware & software required in IBMS for interface shall be provided by the bidder.

Also the communication cables for interfacing the energy meters to IBMS system shall be provided by the bidder.

This shall mainly focus on the integrated system as a whole for energy conservation at gross level whereas network operation monitors each utility. Electrical management shall be taken care i.e. the following parameters shall be monitored that contributes to the cost of electrical energy.

- Power (KW)
  - Power factor
  - Energy (KW H)
  - Demand
  - Voltage
  - Current
  - Frequency
- d) UPS will be provided at various locations depending upon the load requirement for reliable backup supply. Two nos. of UPS shall be provided in Utility building and two nos. of UPS shall be provided in Admin Building. The supply & installation of UPSs is not in the BIDDER's scope. However these UPSs shall be interfaced with the IBMS system over MODBUS/LON/BACNET protocol and necessary hardware & software required in IBMS for interface shall be provided by the bidder. Also the communication cables for interfacing the UPSs to IBMS system shall be provided by the bidder.

#### 8.1.4.3. Plumbing System

- a) Monitor Hi/Lo level at One no. of Underground Domestic water tank
- b) Monitor Hi/Lo level at One no. of Overhead Domestic water tank
- c) Monitor Hi/Lo level at One no. of Overhead Flushing water tank
- d) Monitor and control One no. of solenoid valve based on Overhead Domestic water tank level. If water is at high level setpoint, then valve shall closed, whereas if water is at low level setpoint, then valve shall open.
- e) Monitor and control One no. of solenoid valve based on Overhead Flushing water tank level. If water is at high level setpoint, then valve shall closed, whereas if water is at low level setpoint, then valve shall open.

- f) Monitor and control 1 Duty +1 Standby Domestic water pump based on Overhead Domestic water tank level and solenoid valve command.

If all Domestic water tank level is at High setpoint and all solenoid valves are command to close, then duty pumps shall command to stop.

If any of Domestic water tank level is at Low setpoint and any of solenoid valve is command to open position, then duty pumps shall command to start.

- g) Monitor and control 1 Duty +1 Standby Domestic water pump based on Overhead Flushing water tank level and solenoid valve command.

If all Domestic water tank level is at High setpoint and all solenoid valves are command to close, then duty pumps shall command to stop.

If any of Domestic water tank level is at Low setpoint and any of solenoid valve is command to open position, then duty pumps shall command to start.

#### 8.1.4.4. Fire Fighting System

- a) Monitor one no. of Booster pump status

#### 8.1.5 Direct Digital Control (DDC) Specification

| Sr. No.   | Description            | Requirement                                                                           |
|-----------|------------------------|---------------------------------------------------------------------------------------|
| <b>A.</b> | <b>GENERAL</b>         |                                                                                       |
| 1.        | Make                   | Bidder to Specify                                                                     |
| 2.        | Model No               | Bidder to Specify                                                                     |
| <b>B.</b> | <b>FEATURES</b>        |                                                                                       |
| 1.        | Type                   | Microprocessor based fully programmable with onboard real time clock                  |
| 2.        | Local display with DDC | Required <input type="checkbox"/><br>Not Required <input checked="" type="checkbox"/> |
| 3.        | Communication port     | Required <input checked="" type="checkbox"/><br>Not Required <input type="checkbox"/> |
| 4.        | Memory                 | Non volatile memory                                                                   |
| 5.        | Network capability     | Required <input checked="" type="checkbox"/><br>Not Required <input type="checkbox"/> |

| Sr. No.   | Description                                                                                                                                    | Requirement                                                                           |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 6.        | Management function as alarm management, trending functions, remote management, access protection levels, time scheduling, data processing etc | Required <input checked="" type="checkbox"/><br>Not Required <input type="checkbox"/> |
| 7.        | Communication between DDC to DDC                                                                                                               | Peer to Peer communication                                                            |
| 8.        | Network interface                                                                                                                              | TCP/ IP                                                                               |
| 9.        | Inputs to DDC                                                                                                                                  | Digital inputs, Analog inputs                                                         |
| 10.       | Outputs to DDC                                                                                                                                 | Digital outputs, Analog outputs and PFC to drive auxiliary contactor                  |
| 11.       | Numbers of I/O module                                                                                                                          | Refer I/O table sheet                                                                 |
| 12.       | Facility to expand I/O channels in each DDC                                                                                                    | Required <input checked="" type="checkbox"/><br>Not Required <input type="checkbox"/> |
| 13.       | LED status for each I/O channel                                                                                                                | Required <input checked="" type="checkbox"/><br>Not Required <input type="checkbox"/> |
| 14.       | Power supply                                                                                                                                   | 230VAC from UPS                                                                       |
| 15.       | Data back-up in case of power failure                                                                                                          | Required <input checked="" type="checkbox"/><br>Not Required <input type="checkbox"/> |
| 16.       | Location of the DDC                                                                                                                            | Please refer floor layout                                                             |
| 17.       | Final paint colour (Exterior)                                                                                                                  | RAL-7032                                                                              |
| 18.       | Final paint colour (Interior)                                                                                                                  | Glossy white                                                                          |
| 19.       | Heat dissipation                                                                                                                               | Bidder to Specify                                                                     |
| 20.       | Rating of relay contact                                                                                                                        | Bidder to Specify                                                                     |
| 21.       | Analog input/ output                                                                                                                           | Refer I/O table sheet                                                                 |
| 22.       | Digital input/ output                                                                                                                          | Refer I/O table sheet                                                                 |
| <b>C.</b> | <b>CONSTRUCTIONAL FEATURES</b>                                                                                                                 |                                                                                       |



| Sr. No.   | Description                                                                   | Requirement                                                                                                                                                                                          |
|-----------|-------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1.        | Sheet material                                                                | CRCA-cold rolled prefabricated                                                                                                                                                                       |
| 2.        | Sheet material thickness                                                      | 2mm                                                                                                                                                                                                  |
| 3.        | Gland plate thickness                                                         | 3mm                                                                                                                                                                                                  |
| 4.        | Neoprene gaskets for doors / covers                                           | Required <input checked="" type="checkbox"/><br>Not Required <input type="checkbox"/>                                                                                                                |
| 5.        | Cable entry                                                                   | Bottom <input checked="" type="checkbox"/><br>Top <input type="checkbox"/><br>Side <input type="checkbox"/>                                                                                          |
| 6.        | Lighting                                                                      | Fluorescent<br>(Fluorescent lamp of 40w shall be provided from one end of the panel to the other end at continuous length and shall be operated by the door switches as well as by manual switches.) |
| 7.        | Name plates                                                                   | Required <input checked="" type="checkbox"/><br>Not Required <input type="checkbox"/>                                                                                                                |
| 8.        | SS metal tags for all instruments (to be tagged at all hardware inside panel) | Required <input checked="" type="checkbox"/><br>Not Required <input type="checkbox"/>                                                                                                                |
| 9.        | Receptacle with fuse switch                                                   | Bidder to Specify<br>(Note: Each section of the panels shall be provided with one each 3 pin receptacles for 230V,1P,50C/S)                                                                          |
| 10.       | Adequate maintenance space                                                    | Required <input checked="" type="checkbox"/><br>Not Required <input type="checkbox"/>                                                                                                                |
| 11.       | Weight of the panel (total)                                                   | Bidder to Specify                                                                                                                                                                                    |
| 12.       | Panel shall be powder coated with thickness of coating of min. 60 microns     | Required <input checked="" type="checkbox"/><br>Not Required <input type="checkbox"/>                                                                                                                |
| <b>D.</b> | <b>ENVIRONMENTAL CHARACTERISTICS</b>                                          |                                                                                                                                                                                                      |

| Sr. No.   | Description               | Requirement                 |
|-----------|---------------------------|-----------------------------|
| 1.        | Ambient temperature range | 0-50°C                      |
| 2.        | Humidity range            | 95%                         |
| 3.        | Weather protection class  | Min. IP52 for indoor panels |
| <b>E.</b> | <b>SPARE</b>              |                             |
| 1.        | Quantity                  | Required                    |

### Input /Output table

| EQUIPMENT                                | QTY | AI | AO | DI | DO |                        |
|------------------------------------------|-----|----|----|----|----|------------------------|
|                                          |     |    |    |    |    |                        |
| <b>SCRUBBER (KITCHEN)</b>                |     |    |    |    |    |                        |
| FAN ON/OFF STATUS                        | 1   | 0  | 0  | 1  | 0  | AT FAN MCC PANEL       |
| FAN START-STOP COMMAND                   | 1   | 0  | 0  | 0  | 1  | AT FAN MCC PANEL       |
| FAN TRIP ALARM                           | 1   | 0  | 0  | 1  | 0  | AT FAN MCC PANEL       |
| MANUAL/OFF/AUTO SWITCH                   | 1   | 0  | 0  | 1  | 0  | MANUAL/OFF/AUTO SWITCH |
|                                          |     |    |    |    |    |                        |
| <b>PLUMBING SYSTEM</b>                   |     |    |    |    |    |                        |
| <u>DOMESTIC WATER</u>                    |     |    |    |    |    |                        |
| WATER TANK HIGH LEVEL (OVERHEAD TANK)    | 1   | 0  | 0  | 1  | 0  | LEVEL SWITCH           |
| WATER TANK LOW LEVEL (OVERHEAD TANK)     | 1   | 0  | 0  | 1  | 0  | LEVEL SWITCH           |
| WATER TANK HIGH LEVEL (UNDERGROUND TANK) | 1   | 0  | 0  | 1  | 0  | LEVEL SWITCH           |
| WATER TANK LOW LEVEL (UNDERGROUND TANK)  | 1   | 0  | 0  | 1  | 0  | LEVEL SWITCH           |
| VALVE ON/OFF COMMAND                     | 1   | 0  | 0  | 0  | 1  | SOLENOID VALVE         |
| VALVE ON/OFF STATUS                      | 1   | 0  | 0  | 1  | 0  | SOLENOID VALVE         |
| PUMP ON/OFF STATUS                       | 2   | 0  | 0  | 1  | 0  | AT PUMP MCC PANEL      |
| PUMP START-STOP COMMAND                  | 2   | 0  | 0  | 0  | 2  | AT PUMP MCC PANEL      |
| PUMP TRIP ALARM                          | 2   | 0  | 0  | 2  | 0  | AT PUMP MCC PANEL      |
| MANUAL/OFF/AUTO SWITCH                   | 2   | 0  | 0  | 2  | 0  | MANUAL/OFF/AUTO SWITCH |
|                                          |     |    |    |    |    |                        |
| <u>FLUSHING WATER</u>                    |     |    |    |    |    |                        |
| WATER TANK HIGH LEVEL (OVERHEAD TANK)    | 1   | 0  | 0  | 1  | 0  | LEVEL SWITCH           |

| EQUIPMENT                                                        | QTY | AI       | AO       | DI        | DO       |                                              |
|------------------------------------------------------------------|-----|----------|----------|-----------|----------|----------------------------------------------|
| WATER TANK LOW LEVEL (OVERHEAD TANK)                             | 1   | 0        | 0        | 1         | 0        | LEVEL SWITCH                                 |
| VALVE ON/OFF COMMAND                                             | 1   | 0        | 0        | 0         | 1        | SOLENOID VALVE                               |
| VALVE ON/OFF STATUS                                              | 1   | 0        | 0        | 1         | 0        | SOLENOID VALVE                               |
| PUMP ON/OFF STATUS                                               | 2   | 0        | 0        | 2         | 0        | AT PUMP MCC PANEL                            |
| PUMP START-STOP COMMAND                                          | 2   | 0        | 0        | 0         | 2        | AT PUMP MCC PANEL                            |
| PUMP TRIP ALARM                                                  | 2   | 0        | 0        | 2         | 0        | AT PUMP MCC PANEL                            |
| MANUAL/OFF/AUTO SWITCH                                           | 2   | 0        | 0        | 2         | 0        | MANUAL/OFF/AUTO SWITCH                       |
|                                                                  |     |          |          |           |          |                                              |
| <b>FIRE FIGHTING SYSTEM</b>                                      |     |          |          |           |          |                                              |
| BOOSTER PUMP STATUS                                              | 1   | 0        | 0        | 1         | 0        | AT PUMP MCC PANEL                            |
|                                                                  |     |          |          |           |          |                                              |
| <b>ELECTRICAL SYSTEM</b>                                         |     |          |          |           |          |                                              |
| INCOMING BREAKERS STATUS (HT)                                    | 1   | 0        | 0        | 2         | 0        |                                              |
| OUTGOING BREAKERS STATUS (LT)                                    | 2   | 0        | 0        | 6         | 0        |                                              |
| SMART METERS                                                     | 8   | 0        | 0        | 0         | 0        | SOFT INTEGRATION                             |
| UPS                                                              | 2   | 0        | 0        | 0         | 0        | SOFT INTEGRATION                             |
|                                                                  |     |          |          |           |          |                                              |
| <b>VARIABLE REFRIGERANT FLOW (VRF) CONTROLLER</b>                | 2   | 0        | 0        | 0         | 0        | SOFT INTEGRATION                             |
|                                                                  |     |          |          |           |          |                                              |
| <b>Heater Control (To maintain Humidity in Specialized Labs)</b> |     |          |          |           |          |                                              |
| Humidity Sensor                                                  | 7   | 7        | 0        | 0         | 0        | Humidity Sensor                              |
| Electric Heater Start Stop                                       | 3   | 0        | 0        | 0         | 9        | One command point for one step is considered |
| Electric Heater Status                                           | 3   | 0        | 0        | 9         | 0        | One status point for one step is considered  |
|                                                                  |     |          |          |           |          |                                              |
| <b>TOTAL</b>                                                     |     | <b>0</b> | <b>0</b> | <b>31</b> | <b>7</b> |                                              |

### 8.1.6 EQUIPMENT & SERVICES PROVIDED BY OTHERS

8.1.6.1. The following are the equipment and services that shall be provided to the CONTRACTOR by others:

- a) 240V AC, Feeder (UPS supply), for IBMS system at one location will be provided by purchaser. CONTRACTOR shall lay the Power cables from the

power supply distribution board to all the equipment supplied by CONTRACTOR.

- b) Uninterruptible Power supply (UPS).
- c) Energy meters
- d) DG set system
- e) Utility Systems as Fire fighting systems, Water Distribution System
- f) HVAC system (excluding field instruments and controls). Tapping for mounting of instruments on HVAC equipment and ducts.
- g) Electrical & Instrument earth Pits

### **8.1.7 Cables and Conduits:-**

#### **8.1.7.1. Cabling**

- a) Contractor shall supply & lay the following cables along with cable trays, conduits and all other installation hardware and accessories
- b) Field instruments / modulating valves to IBMS Server/operator station through DDC
- c) VRF controllers to IBMS Server/operator station through DDC
- d) Ventilation panels to the IBMS Server/operator station through DDC
- e) Power supply cabling from UPS system to the IBMS server/ operator station
- f) Power supply cabling from UPS to DDCs.

8.1.7.2. Cabling (standard communication link) from IBMS to other control systems viz., Fire detection and Alarm system, UPS(s), DG set panel, energy meters for communication.

#### **8.1.7.3. Cable specification for Instrument signals**

- a) For Digital signals 2 core x 1.5 sq.mm stranded annealed tinned copper conductor, PVC insulated, overall shielding with aluminium tape, FRLS sheathed, unarmoured cable. For Analog Signals 1P X 1.0 sq.mm, stranded annealed tinned copper conductor, twisted pair, PVC insulated, overall shielding with aluminium tape, FRLS sheathed, unarmoured cable.
- b) All these cables shall be from field instruments to DDC Controllers and should be laid in conduits.
- c) The cables standards shall be conforming to IS 1554, BS:5308.

8.1.7.4. Conduits shall be UPVC as per IS: 9537 Part III and accessories i.e. junction boxes, tees etc. as per IS: 3419. Flexible conduits shall be used at relevant places. The size of the conduits shall be discussed during detailed engineering.

8.1.7.5. CONTRACTOR shall use UPVC conduits upto 2 runs of cables, above two runs Galvanised Iron covered cable trays shall be used for laying of cables.

### **8.1.8 Installation Works**

8.1.8.1. Bidder has to supply and lay the conduits with the structural steel supports and required accessories. Supply and laying of all the cables of IBMS in the conduits shall be done by the bidder.

8.1.8.2. Bidder shall be responsible for the following:

- a) Exposed conduiting is planned overall, above false ceiling and laying of the exposed conduits along with accessories for the systems shall be by the CONTRACTOR.
- b) Cabling and conduiting for the modules located on walls shall be concealed and laying of concealed conduits shall be by the bidder. CONTRACTOR should carry out necessary chasing in the brick/block walls, laying, fixing, re-doing the plastering and making the surface neat.
- c) CONTRACTOR to estimate the quantity of cables and conduits as per the system layout enclosed.
- d) CONTRACTOR to confirm the BOM based on the system being supplied. Any changes suggested by the CONTRACTOR in the system layouts enclosed with this tender should be supported by valid explanation. On mutual agreement the BOM shall then be revised.
- e) UPS power shall be provided and further distribution at all elevations wherever required shall be by the CONTRACTOR.
- f) CONTRACTOR to indicate the feeder requirements at all elevations.
- g) CONTRACTOR shall use UPVC conduits upto 2 runs of cables, above two cable runs Galvanised Iron covered cable trays shall be used for laying of cables

### **8.1.9 POWER SUPPLY**

8.1.9.1. IBMS shall be operated on 230V AC, single Phase, 50 Hz Supply. The entire IBMS shall be on UPS with battery backup for 30 minutes. The feeder or socket points shall be provided by others at the required points and the further cabling shall be by the bidder. Bidder to indicate total UPS power/feeder requirement at each location.

### **8.1.10 Instrument Grounding**

8.1.10.1. Separate instrument earth pits as required will be provided for grounding the instrument cable shield. Instrument casing will be connected to electrical safety earth. The ground resistance shall be less than / equal to 10 ohms.

8.1.10.2. Earthing:

- a) Earthing for the entire system to be provided, shall be in CONTRACTOR's scope. Separate electrical & instrumentation earth pits shall be provided by others. Both electrical and instrument earth pit will be interconnected. Contractor shall connect the safety ground bus & instrument ground bus for the systems supplied by him to the respective earth pits.

- b) Single point earthing configuration shall be followed for the cable shields i.e. all signal and control cables shields shall be grounded at one end only to avoid ground loop.

#### **8.1.11 SUMMARY OF DATA TO BE FURNISHED ALONG WITH BID AND AFTER ACCEPTANCE OF PURCHASE ORDER**

- 8.1.11.1. The CONTRACTOR shall ensure the following documentation are prepared and submitted to PURCHASER for his review / record.

| <b>Sr.no.</b> | <b>Drawings/Docs.</b>                                                                                                         | <b>To be furnished along with bid</b> | <b>To be furnished after award of contract</b> |
|---------------|-------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|------------------------------------------------|
| 1             | Data sheet & write-up shall be signed/filled and stamped by the CONTRACTOR indicating compliance to the specifications.       | *                                     |                                                |
| 2             | Technical Catalogues of each module/card/instrument of each type required for the complete IBMS system with software features | *                                     |                                                |
| 3             | Overall system Configuration diagram with add on interfacing                                                                  | *                                     |                                                |
| 4             | Dimensional drawings of Panels along with estimated BOQ for each of the systems.                                              |                                       | *                                              |
| 5             | Testing & evaluation plan for the systems offered                                                                             |                                       | *                                              |
| 6             | Operation & maintainance manuals                                                                                              |                                       | *                                              |
| 7             | Quality assurance documentation specific for the project.                                                                     |                                       | *                                              |
| 8             | Final built documentation folder with all items for future reference.                                                         |                                       | *                                              |
| 9             | Unpriced purchase order copy for various bought out / sub contracted equipment / services.                                    |                                       | *                                              |

| Sr.no. | Drawings/Docs.                                                                                                                                                                                      | To be furnished along with bid | To be furnished after award of contract |
|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|-----------------------------------------|
| 10     | Internal wiring diagrams indicating termination details of each component.                                                                                                                          |                                | *                                       |
| 11     | Bill of material indicating tag no, quantity, make / model no. of various cards / modules for IBMS system with software, DDCs, field instruments, any other item required for completion of system. | *                              |                                         |
| 12     | Datasheets & catalogues for power & Communication, I & C cable.                                                                                                                                     |                                | *                                       |
| 13     | Cable schedules & interconnection cable schedules                                                                                                                                                   |                                | *                                       |
| 14     | Copies of the graphics / screens to be developed for operation and monitoring of entire system.                                                                                                     |                                | *                                       |
| 15     | List of signals connected to each DDCs.                                                                                                                                                             |                                | *                                       |
| 16     | Power supply distribution scheme                                                                                                                                                                    |                                | *                                       |
| 17     | Estimated Power consumption location wise                                                                                                                                                           |                                | *                                       |

\* CONTRACTOR shall furnish the data.

### 8.1.12 TRAINING

8.1.12.1. 1 No. Contractor's engineer shall be made available for 1 month for assistance in operation, maintenance, tuning & training of Purchaser's personnel at Site after commissioning of IBMS & PA system with all necessary integration with other systems.

8.1.12.2. Training shall be required on both hardware & application software development.

### 8.1.13 Site Acceptance Test

Full integrated site acceptance test shall be performed before hand over of total system to the PURCHASER. The test shall demonstrate the entire system functionality to the complete satisfaction of client / consultant. The supplier shall provide all personnel, test facilities, equipment and tools etc. for the same.

#### **8.1.14 MAINTENANCE REQUIREMENTS**

In order to carry out preventive maintenance, it should be possible to readily disassemble, repair, and reassemble the equipment in the shortest period and to attend to any defect by a minimum disassembly.

All system must have convenient maintenance characteristics including easy access to replacement part which can be installed by personnel with minimum skill.

#### **8.1.15 ANNUAL MAINTAINANCE CONTRACT**

All components, system software, parts and assemblies supplied by the BIDDER shall be guaranteed against defects in materials and workmanship for one year from acceptance date.

Bidder to quote for Annual maintenance & operations Contract of IBMS system after defects liability period, for a period of three years.

#### **8.1.16 TESTING, INSTALLATION, COMMISSIONING AND ACCEPTANCE**

##### **8.1.16.1. Testing Requirements**

##### **8.1.16.2. Tests on cables**

- Check details are in accordance with the specification.
- Check for physical damage.
- Megger test between each core and armour/sheath
- Continuity check including screen continuity
- Terminations of the cables at both ends.

##### **8.1.16.3. Tests on electrical installation**

- Checking of closing, tripping, supervision and interlocking of control devices.
- Checking operation of all system circuits.

##### **8.1.16.4. Test on complete IBMS system.**

- On completion, the functioning of IBMS systems with all other utilities systems interfaced with it shall be tested to demonstrate its correct operation in accordance with the Specification.
- For testing, the Contractor may provide temporary means to simulate operating conditions, but the system shall not be finally accepted until correct operation has been demonstrated to the satisfaction of the Purchaser.

#### **8.1.17 Commissioning**

##### **8.1.17.1. Commissioning Procedure shall be carried out in a methodical sequence as follows**



- Start-up,
- Initial running,
- Operability adjustment,
- Stable operation
- Final adjustment

8.1.17.2. The Contractor shall check the operating conditions by constantly monitoring operating data.

8.1.17.3. The CONTRACTOR shall specify for each discrete part of the system for which the operational data has to be recorded and the manner in which the data is to be taken. All the operating data shall be recorded, evaluated and submitted to the PURCHASER.

### **8.1.18 SPECIFIC REQUIREMENTS / INSTRUCTION TO BIDDERS**

8.1.18.1. This is a Unit rate contract. The price/ contract value shall be arrived at based on quantities indicated in Bill of Quantity and unit rates for supply & erection quoted by the Bidder. The break-up of unit prices for various items in Bill of Quantity shall be used for future addition/deletion of the items, if any.

8.1.18.2. Contractor shall estimate Cable quantities based on enclosed GA drawings & layouts for bidding purpose only. However the Contractor is advised to visit Site & take actual measurements for arriving at the cable quantities actually required at Site before placement of Order.

8.1.18.3. The construction of this facility requires that, all CONTRACTOR'S adhere to good daily housekeeping practices. During construction the CONTRACTOR shall every day, keep all work and storage areas used by them free from accumulation of waste materials. Scrap / rubbish shall be removed from the site to the satisfaction of the PURCHASER. The CONTRACTOR shall maintain a crew to carry out this function without any additional payment.

8.1.18.4. The equipment to be supplied and erected under this specification shall be in accordance with specification & data sheets.

8.1.18.5. Any item which may not have been specifically mentioned herein but are needed to complete the equipment / system shall also be treated as included and the same shall also be supplied and erected at no extra cost, unless otherwise specifically excluded as indicated.

8.1.18.6. The BIDDER shall comply with all systems / parameters wherever they are specified in data sheets. No credit will be given during tender evaluation, if parameters better than those specified are offered by the BIDDER.

8.1.18.7. Deviation from the specifications, if acceptable to the PURCHASER in so far as practicable shall be converted to rupee value and added to the bid price to compensate for the deviation from the specification. In determining the rupee value of the deviations, the PURCHASER shall use the parameters consistent with that specific in the documents and specifications and other information as necessary and available to the PURCHASER.

#### 8.1.18.8. Bidder's Offer

- a) To enable thorough and fast scrutiny of the BIDDER's offer, BIDDERS are advised to respond all their technical data in the enquiry by clearly marking out their response, wherever they want to provide additional data and / or they deviate from the specified requirements. In case of full compliance, the enquiry specification and data sheets shall remain unaltered. Each data sheet & write up in specification shall be signed and stamped by the BIDDER. This requirement is very important. Non compliance of this by the BIDDER may result in their bid being rejected.
- b) BIDDER is advised to quote for the complete scope and partial response shall not be entertained. In case of few items which do not directly fall under BIDDER's manufacturing range and / or not available from indigenous source, BIDDER should take the responsibility upon themselves to arrange to procure them and supply to ensure that their offer is complete in all respects.

### 8.1.19 SPARES AND MAINTENANCE TOOLS AND TACKLES

#### 8.1.19.1. GENERAL

- a) All spares and maintenance tools and tackles shall be designed to enable maintenance to be carried out in the least time and at the least cost and support resources without affecting the performance and safety aspects.
- b) All the spares and maintenance tools and tackles supplied shall be new and unused.
- c) The VENDOR/CONTRACTOR shall guarantee that before going out of production of spares and maintenance tools and tackles for the equipment furnished, he shall give at least 12 months advance notice to the PURCHASER, so that the latter may order his requirement in one lot, if so desired.

#### 8.1.19.2. SPARES

The BIDDER shall include the following three (3) categories of spares in his scope of supply.

##### a) START-UP AND COMMISSIONING SPARES

Spares required for start-up and commissioning of the equipment, plant or system shall be indicated by the BIDDER in 'Schedule of Start-up and Commissioning Spares'. Unit price and total price to be indicated in this schedule are for information only. Total value of such spares shall be included in the quoted price for supply or erection of the equipment, plant or system. For equipment, plant and system for which erection and commissioning is in the CONTRACTOR's scope, quantity of spares actually used during the start-up and commissioning or its total value may be more than that indicated in the BID. No additional amount is payable to the CONTRACTOR on this account.

##### b) ESSENTIAL SPARES

Essential spares are those, which are considered necessary by the PURCHASER for three (3) years of trouble-free operation of the equipment, plant or system.

These shall be as listed in data sheets A. The BIDDER shall include these in 'Schedule of Essential and Recommended Spares'. Total value of such spares shall not be included in the quoted price for supply or erection of the equipment, plant or system. This value shall be considered for the purpose of the BID evaluation.

c) **RECOMMENDED SPARES**

Recommended spares are those, which are considered necessary by the BIDDER for three (3) years of trouble-free operation of the equipment, plant or system in addition to those, specified as 'Essential Spares' by the PURCHASER. Total value of such spares shall not be included in the quoted price for supply or erection of the equipment, plant or system. This value shall be considered for the purpose of the BID evaluation.

- d) All spares supplied shall be strictly inter-changeable with the parts for which these are intended to be replacements. The spares shall be treated and packed for long term storage under the climatic conditions prevailing at the site e.g., small items shall be packed in sealed transparent plastic bags with desiccator packs as necessary.
- e) Each spare shall be clearly marked or labelled on the outside of its packing with its description and purpose. When more than one spare is packed in a single case, a general description of the contents shall be shown on the outside of such case and a detailed list enclosed. All cases, containers and other packages shall be suitably marked and numbered for the purposes of identification.

**8.1.19.3. MAINTENANCE TOOLS AND TACKLES**

- a) The BIDDER shall indicate and include in his scope of supply all the necessary tools, tackles, appliances and lifting devices for the effective maintenance and servicing of the equipment and its components. The BIDDER shall list the maintenance tools and tackles offered by him in 'Schedule of Maintenance Tools and Tackles'. The BIDDER shall also include and supply the minimum maintenance tools and tackles. PURCHASER reserves the right to exclude any of the above items from the VENDOR's/CONTRACTOR's scope of supply and effect price adjustments on the basis of the unit prices quoted. The despatch of tools, tackles, appliances and lifting devices shall be synchronised with the despatch of the related equipment.
- b) Each tool and tackle shall be clearly marked with its size and purpose. Each set of tools and tackles shall be suitably arranged in fitted boxes of mild steel construction, the number of boxes being determined in relation to the layout of the plant in question. The taps, stocks and dies shall be kept in approved mild steel boxes with compartments for individual items. If the weight of any box and its contents is such that it cannot be conveniently carried, it shall be supplied on steerable rubber tyred wheels.
- c) Each tool box shall be provided with a lock and two keys and shall be painted navy blue and clearly marked, in white letters, with the name of the equipment, plant or system.

- d) The tools and tackles with the appropriate boxes, are to be handed over to the
- e) PURCHASER at the time of issue of the taking-over certificate.

## **8.2.FIRE DETECTION AND ALARM SYSTEM**

### **8.2.1 Scope of work**

- 8.2.1.1. This specification covers specific requirements of design, preparation of detailed drawings, manufacture, testing at manufacturer's works, supply, inspection at Bidder's/Sub-Bidder's works, packing, forwarding, transportation, transit insurance, delivery at site, installation, testing at site and commissioning of the Fire Detection and Alarm System (FDAS).
- 8.2.1.2. FDAS shall be proposed for New Administration block.
- 8.2.1.3. Main Fire Alarm Control Panel (FACP) shall be placed in the Fire command centre room at Reception, Ground Floor in the Administration block. One no. of FACP is placed at Reception area of Training and Production Block and one no. of FACP is placed at Ground Floor of Dining Block. Additionally a repeater fire alarm panel shall be provided at the Main security gate of entire complex.
- 8.2.1.4. Graphical presentation of FDAS system shall be viewed at IBMS monitor in Fire Command Centre, First Floor.
- 8.2.1.5. It is not the intent to specify completely herein all details of design and construction of equipment or materials to be supplied or of services to be rendered. However, the equipment, materials and services shall conform in all respects to high standards of engineering design, workmanship and be capable of performing in continuous commercial operation in a manner acceptable to PURCHASER who will interpret the meaning of drawings and specifications and shall have the power to reject any work or material which in his judgement are not in full accordance therewith.

### **8.2.2 Codes and Standards**

The equipment and installation shall comply with the current and latest edition of the following codes and listing:

#### **8.2.2.1. Codes**

- a. National Fire Protection Association (NFPA):
- NFPA 72      National Fire Alarm Code
  - NFPA 76      Telecommunication Facilities
  - NFPA 101     Life Safety Code
  - NFPA 90A     Air conditioning & ventilation system

#### **8.2.2.2. Listings**

- a. Underwriters Laboratories Inc. (UL) - USA:
- UL 268      Smoke Detectors for Fire Protective Signalling Systems
  - UL 864      Control Units for Fire Protective Signalling Systems 9th Edition
  - UL 268      A Smoke Detectors for Duct Applications
  - UL 521      Heat Detectors for Fire Protective Signalling Systems
  - UL 464      Audible Signalling Appliances
  - UL 38       Manually Actuated Signalling Boxes

- UL 346            Water flow Indicators for Fire Protective Signalling Systems
- UL 1971        Visual Notification Appliances
- UL 228          Door Holders
- UL 1481        Power Supply for fire protective signalling system.
- UL 1711        Amplifiers for Fire Protective Signalling Systems.
- UL 1635        Digital Alarm Communicator System Units

ADDENDUMS thereafter in UL Code for Fire Detection (2007).

- UL 9th Schedule Certification
  - International Standards Organization (ISO)
  - ISO-9000
  - ISO-9001
  - European Union (EU)
  - EMC Directive 89/336/ EEC
  - Electromagnetic Compatibility Requirements
  - Factory Mutual (FM) Approval
- b. Local Codes
- NATIONAL BUILDING CODES
  - IS-2189
- c. European Standards
- EN54

### **8.2.3 System Description**

8.2.3.1. The Fire Detection and Alarm system comprises of the following.

- a. Multi-Criteria Detector
- b. Smoke Detector
- c. Heat detectors
- d. Sounders cum Strobe
- e. Manual call points
- f. Response Indicator
- g. Fault Isolator Module
- h. Control Module
- i. Monitor Module
- j. 1 Nos. FDAS panel
- k. 1 No. Repeater panel to be located in Security gate.
- l. Cabling for FDAS

8.2.3.2. Please refer FDAS layout drawings for location of fire detectors, manual call points and sounders. However it is the contractor's responsibility to evaluate the quantity & type of fire detectors, manual call points and sounders as per the specified Codes & standard.

### **8.2.4 Specifications**

#### 8.2.4.1. Fire Alarm Control Panel Specification

| Sr. No.   | Description                          | Requirement                                                                                                                                                                        |
|-----------|--------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>A.</b> | <b>GENERAL</b>                       |                                                                                                                                                                                    |
| 1.        | Type                                 | Microprocessor Based                                                                                                                                                               |
| 2.        | Panel Location                       | Reception Area, Ground Floor, Administration Building                                                                                                                              |
| <b>B.</b> | <b>DISPLAY ON PANEL</b>              |                                                                                                                                                                                    |
| 1.        | Type                                 | Backlit LCD                                                                                                                                                                        |
| 2.        | Lines X Characters                   | LCD, Alphanumeric, display of addresses, Minimum 80/160 characters                                                                                                                 |
| 3.        | Parameters to be displayed           | <ol style="list-style-type: none"> <li>1. Addresses</li> <li>2. Fire situation</li> <li>3. Fire progression</li> <li>4. Evacuation details</li> <li>5. Fault Conditions</li> </ol> |
| 4.        | LED indication for:                  | <ol style="list-style-type: none"> <li>1. Power ON</li> <li>2. Fire alarm</li> <li>3. Maintenance</li> <li>4. Fault conditions</li> </ol>                                          |
| 5.        | Programming facility                 | <ol style="list-style-type: none"> <li>1. Keypad</li> <li>2. Touch screen</li> </ol>                                                                                               |
| 6.        | Password and selectable access level | Required                                                                                                                                                                           |
| 7.        | Switches / Push buttons              | Acknowledge, Silence and System reset                                                                                                                                              |
| <b>C.</b> | <b>PANEL CHARACTERISTICS</b>         |                                                                                                                                                                                    |
| 1.        | Audio indication on alarm            | Required                                                                                                                                                                           |

| <b>Sr. No.</b> | <b>Description</b>                  | <b>Requirement</b>                                                                                                                                                                                                 |
|----------------|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2.             | Fault isolation capability          | Required                                                                                                                                                                                                           |
| 3.             | Alarm verification capability       | Required                                                                                                                                                                                                           |
| 4.             | Sensitivity adjustment              | Required                                                                                                                                                                                                           |
| 5.             | Sensor self test capability         | Required                                                                                                                                                                                                           |
| 6.             | Zone wise grouping                  | Required                                                                                                                                                                                                           |
| 7.             | Response time                       | 10 Seconds (Max) for full loaded panel.<br>Note: The maximum allowable response delay from activation of an initiating device to receipt and display by the receiver/ fire alarm control unit shall be 10 seconds. |
| 8.             | Fault tolerant wiring capability    | Required                                                                                                                                                                                                           |
| 9.             | No. of loops / Panel                | 2 Nos. Loops (Working + Spares for future)<br>Spare cards shall be mounted inside the panel along with working cards                                                                                               |
| 10.            | Expansion capability                | Required                                                                                                                                                                                                           |
| 11.            | Minimum addressable points per loop | Each loop shall be loaded upto 80% of its capacity. However 20% spare shall be considered in each loop for future additional detectors / devices.                                                                  |
| 12.            | SLC loop cabling type               | Style 6, class 'A' as per NFPA 72                                                                                                                                                                                  |
| 13.            | Loop length supported               | Upto 1.5 Km                                                                                                                                                                                                        |
| 14.            | Memory                              | NON-Volatile, NON-Erasable and NON-Rewritable                                                                                                                                                                      |
| 15.            | Networking                          | 1. Panel to Panel                                                                                                                                                                                                  |



| Sr. No.   | Description               | Requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----------|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|           |                           | 2. Panel to Repeater Panel<br>3. Panel to Graphical User Interface (GUI)<br>4. PC to printer                                                                                                                                                                                                                                                                                                                                                                                                          |
| 16.       | Networking protocol       | RS-485 or Ethernet                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 17.       | Degraded mode operation   | Required                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 18.       | Redundancy for controller | Not Required                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 19.       | Event recorder            | Required                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>D.</b> | <b>POWER</b>              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 1.        | Supply voltage to panel   | 230V - 10%, 50Hz, UPS mains supply                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 2.        | Operating current         | Bidder to specify                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 3.        | Output voltage            | Bidder to specify                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 4.        | Wattage consumption       | Bidder to specify                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 5.        | Types of batteries        | Sealed Maintenance Free (SMF)<br>Note:- Battery shall be supplied having manufacturing date nearer to the supply date of battery.                                                                                                                                                                                                                                                                                                                                                                     |
| 6.        | Battery capacity          | As per NFPA 72<br>Note:- Battery shall have sufficient capacity to power the fire alarm system under non alarm condition for a minimum of 24 hours and shall be capable of operating the system during emergency condition for a period of 15 minutes at maximum connected load, upon normal AC power failure. The full load shall consist of simultaneous operation of all sounders, operation of detectors at least 25% of zones (with minimum of two zones) and the operation of fault indicators. |

| Sr. No.   | Description                             | Requirement                                                                                                                                                                              |
|-----------|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7.        | Terminal blocks for mains supply        | Required                                                                                                                                                                                 |
| 8.        | Isolated earth bar for shield grounding | Required                                                                                                                                                                                 |
| <b>E.</b> | <b>MECHANICAL CHARACTERISTICS</b>       |                                                                                                                                                                                          |
| 1.        | Dimensions                              | Bidder to specify                                                                                                                                                                        |
| 2.        | Weight                                  | Bidder to specify                                                                                                                                                                        |
| 3.        | Mounting                                | <div>Wall <input checked="" type="checkbox"/></div> <div>Surface <input type="checkbox"/></div> <div>Flush <input type="checkbox"/></div> <div>Semi Flush <input type="checkbox"/></div> |
| 4.        | Sheet thickness                         | 1.6mm                                                                                                                                                                                    |
| 5.        | Colour shade                            | Bidder to specify                                                                                                                                                                        |
| 6.        | Housing material                        | CRCA                                                                                                                                                                                     |
| <b>F.</b> | <b>ENVIRONMENTAL CHARACTERISTICS</b>    |                                                                                                                                                                                          |
| 1.        | Ambient temperature range               | 0-50°C                                                                                                                                                                                   |
| 2.        | Humidity range                          | 95%                                                                                                                                                                                      |
| 3.        | Weather protection class                | Min. IP 20 for indoor panels located in air condition space                                                                                                                              |
| <b>G.</b> | <b>APPROVAL / CERTIFICATE</b>           |                                                                                                                                                                                          |
| 1.        | UL/ FM/ VDS/ EN-54/ LPCB                | Required                                                                                                                                                                                 |
| 2.        | Make                                    | Bidder to specify                                                                                                                                                                        |
| 3.        | Model No                                | Bidder to specify                                                                                                                                                                        |

#### 8.2.4.2. Fire Alarm Repeater Panel Specification

| Sr. No.   | Description                          | Requirement                                                                                                                                                                        |
|-----------|--------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>A.</b> | <b>GENERAL</b>                       |                                                                                                                                                                                    |
| 1.        | Make                                 | Bidder to specify                                                                                                                                                                  |
| 2.        | Model No                             | Bidder to specify                                                                                                                                                                  |
| <b>B.</b> | <b>DISPLAY ON PANEL</b>              |                                                                                                                                                                                    |
| 1.        | Type                                 | Backlit LCD                                                                                                                                                                        |
| 2.        | Lines X Characters                   | Alpha-numeric, LCD display with minimum 80 character, with LED indications                                                                                                         |
| 3.        | Parameters to be displayed           | <ol style="list-style-type: none"> <li>1. Addresses</li> <li>2. Fire situation</li> <li>3. Fire progression</li> <li>4. Evacuation details</li> <li>5. Fault Conditions</li> </ol> |
| 4.        | LED indication for:                  | <ol style="list-style-type: none"> <li>1. Power ON</li> <li>2. Fire alarm</li> <li>3. Maintenance</li> <li>4. Fault conditions</li> </ol>                                          |
| 5.        | Programming facility                 | <ol style="list-style-type: none"> <li>1. Keypad</li> <li>2. Touch screen</li> </ol>                                                                                               |
| 6.        | Password and selectable access level | Required                                                                                                                                                                           |
| 7.        | Switches / Push buttons              | Acknowledge, Silence and System reset                                                                                                                                              |
| <b>C.</b> | <b>PANEL CHARACTERISTICS</b>         |                                                                                                                                                                                    |
| 1.        | Audio indication on alarm            | Required                                                                                                                                                                           |

| Sr. No.   | Description                   | Requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----------|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2.        | Alarm verification capability | Required                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 3.        | Response time                 | 10 Seconds (Max) for full loaded panel.<br>Note: The maximum allowable response delay from activation of an initiating device to receipt and display by the receiver/ fire alarm control unit shall be 10 seconds.                                                                                                                                                                                                                                                                                    |
| 4.        | Memory                        | NON-Volatile, NON-Erasable and NON-Rewritable                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 5.        | Networking                    | Required                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 6.        | Networking protocol           | RS-485 or Ethernet                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>D.</b> | <b>POWER</b>                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 1.        | Supply voltage to panel       | 230V - 10%, 50Hz, UPS mains supply                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 2.        | Operating current             | Bidder to specify                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 3.        | Output voltage                | Bidder to specify                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 4.        | Wattage consumption           | Bidder to specify                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 5.        | Types of batteries            | Sealed Maintenance Free (SMF)<br>Note:- Battery shall be supplied having manufacturing date nearer to the supply date of battery.                                                                                                                                                                                                                                                                                                                                                                     |
| 6.        | Battery capacity              | As per NFPA 72<br>Note:- Battery shall have sufficient capacity to power the fire alarm system under non alarm condition for a minimum of 24 hours and shall be capable of operating the system during emergency condition for a period of 15 minutes at maximum connected load, upon normal AC power failure. The full load shall consist of simultaneous operation of all sounders, operation of detectors at least 25% of zones (with minimum of two zones) and the operation of fault indicators. |
| 7.        | Terminal blocks               | Required                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

| Sr. No.   | Description                             | Requirement                                                                                                                                                                              |
|-----------|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|           | for mains supply                        |                                                                                                                                                                                          |
| 8.        | Isolated earth bar for shield grounding | Required                                                                                                                                                                                 |
| <b>E.</b> | <b>MECHANICAL CHARACTERISTICS</b>       |                                                                                                                                                                                          |
| 1.        | Dimensions                              | Bidder to specify                                                                                                                                                                        |
| 2.        | Weight                                  | Bidder to specify                                                                                                                                                                        |
| 3.        | Mounting                                | <div>Wall <input checked="" type="checkbox"/></div> <div>Surface <input type="checkbox"/></div> <div>Flush <input type="checkbox"/></div> <div>Semi Flush <input type="checkbox"/></div> |
| 4.        | Sheet thickness                         | 1.6mm                                                                                                                                                                                    |
| 5.        | Colour shade                            | Bidder to specify                                                                                                                                                                        |
| 6.        | Housing material                        | CRCA                                                                                                                                                                                     |
| <b>F.</b> | <b>ENVIRONMENTAL CHARCTERISTICS</b>     |                                                                                                                                                                                          |
| 1.        | Ambient temperature range               | 0-50°C                                                                                                                                                                                   |
| 2.        | Humidity range                          | 95%                                                                                                                                                                                      |
| 3.        | Weather protection class                | Min. IP20 for indoor panels located in air condition space                                                                                                                               |
| <b>G.</b> | <b>APPROVAL / CERTIFICATE</b>           |                                                                                                                                                                                          |
| 1.        | UL/ FM/ VDS/ EN-54/ LPCB                | Required                                                                                                                                                                                 |
| 2.        | Make                                    | Bidder to specify                                                                                                                                                                        |
| 3.        | Model No                                | Bidder to specify                                                                                                                                                                        |

#### 8.2.4.3. Fire Alarm Control Relay Module Specification

| Sr. No.   | Description                            | Requirement                                                                                                                                                                                      |
|-----------|----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>A.</b> | <b>GENERAL</b>                         |                                                                                                                                                                                                  |
| 1.        | Make                                   | Bidder to specify                                                                                                                                                                                |
| 2.        | Model No                               | Bidder to specify                                                                                                                                                                                |
| <b>B.</b> | <b>MODULE CHARACTERISTICS</b>          |                                                                                                                                                                                                  |
| 1.        | Application                            | <div>Activating conventional Sounder cum Strobe <input checked="" type="checkbox"/></div> <div>To operate the dry contact for third party application <input type="checkbox"/></div>             |
| 2.        | Type                                   | Microprocessor Based                                                                                                                                                                             |
| 3.        | Addressable                            | Required                                                                                                                                                                                         |
| 4.        | Number of relay outputs in each module | <div>1 No. <input checked="" type="checkbox"/></div> <div>2 No. <input type="checkbox"/></div> <div>4 No. <input type="checkbox"/></div> <div>8 No. <input type="checkbox"/></div>               |
| 5.        | Type of relay contact / contact rating | Bidder to specify                                                                                                                                                                                |
| 6.        | Cabling                                | Two wire signal line circuit style 6, class 'A' as per NFPA-72                                                                                                                                   |
| 7.        | Built-in isolator                      | <div>Not Required</div> <div>Note: In case of built-in isolator requirement the approval/ certification shall be VDS/ EN-54/ LPCB else UL/ FM approval/ certification shall be applicable.</div> |
| <b>C.</b> | <b>POWER</b>                           |                                                                                                                                                                                                  |
| 1.        | Operating voltage                      | 24 VDC (Loop powered)                                                                                                                                                                            |
| 2.        | Operating current                      | Bidder to specify                                                                                                                                                                                |
| 3.        | Wattage consumption                    | Bidder to specify                                                                                                                                                                                |

| <b>Sr. No.</b> | <b>Description</b>                  | <b>Requirement</b>                  |
|----------------|-------------------------------------|-------------------------------------|
| <b>D.</b>      | <b>MECHANICAL CHARACTERISTICS</b>   |                                     |
| 1.             | Dimensions                          | Bidder to specify                   |
| 2.             | Weight                              | Bidder to specify                   |
| 3.             | Material of Enclosure               | Non Corrosive                       |
| <b>E.</b>      | <b>ENVIRONMENTAL CHARCTERISTICS</b> |                                     |
| 1.             | Ambient temperature range           | 0-50°C                              |
| 2.             | Humidity range                      | 95%                                 |
| 3.             | Enclosure weather protection class  | For Indoor IP54<br>For Outdoor IP65 |
| 4.             | Explosion proof enclosure           |                                     |
| 5.             | Hazardous area classification       |                                     |
| <b>F.</b>      | <b>APPROVAL / CERTIFICATE</b>       |                                     |
| 1.             | UL/ FM/ VDS/ EN-54/ LPCB            | Required                            |

#### 8.2.4.4. Fire Alarm Heat Detector Specification

| <b>Sr. No.</b> | <b>Description</b>              | <b>Requirement</b>                                                                                            |
|----------------|---------------------------------|---------------------------------------------------------------------------------------------------------------|
| <b>A.</b>      | <b>GENERAL</b>                  |                                                                                                               |
| 1.             | Make                            | Bidder to specify                                                                                             |
| 2.             | Model No                        | Bidder to specify                                                                                             |
| <b>B.</b>      | <b>DETECTOR CHARACTERISTICS</b> |                                                                                                               |
| 1.             | Type                            | Microprocessor Based-Combination of Fixed Temperature and Rate of Rise of <input checked="" type="checkbox"/> |

| Sr. No. | Description                                 | Requirement                                                                                                                                                                                                                                                                                                         |
|---------|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|         |                                             | Temperature<br>Microprocessor Based-Fixed Temperature <input type="checkbox"/><br>Microprocessor Based-Rate of Rise of Temperature <input type="checkbox"/>                                                                                                                                                         |
| 2.      | Addressable                                 | Required                                                                                                                                                                                                                                                                                                            |
| 3.      | LED Status                                  | Multi colored, multi status LED                                                                                                                                                                                                                                                                                     |
| 4.      | Response Time                               | The maximum allowable response delay from activation of an initiating device to receipt and display by the receiver/ fire alarm control unit shall be 10 seconds                                                                                                                                                    |
| 5.      | Terminals for connecting response indicator | Required<br>(Bidder to consider fault isolator module after every 10 Nos. detectors/ devices for UL/ FM offered panel or inbuilt fault isolator base shall be provided for EN-54/ VDS/ LPCB offered panel. Bidder to provide necessary provision to connect the response indicator for any type of fire detectors.) |
| 6.      | Sensor Coverage                             | Bidder to specify                                                                                                                                                                                                                                                                                                   |
| 7.      | Alarm set point for Heat                    | For fixed temperature type - 55°C<br>For rate of rise of temp. type 7°C / Minutes                                                                                                                                                                                                                                   |
| 8.      | Sensitivity Adjustment                      | Required                                                                                                                                                                                                                                                                                                            |
| 9.      | Immune to false alarm                       | Required                                                                                                                                                                                                                                                                                                            |
| 10.     | Cabling                                     | Two wire signal line circuit style 6, class 'A' as per NFPA-72                                                                                                                                                                                                                                                      |
| 11.     | Built-in isolator                           | Not Required<br><br>Note: In case of built-in isolator requirement the approval/ certification shall be VDS/ EN-54/ LPCB else UL/ FM approval/ certification shall be applicable.                                                                                                                                   |



| <b>Sr. No.</b> | <b>Description</b>                   | <b>Requirement</b>    |
|----------------|--------------------------------------|-----------------------|
| <b>C.</b>      | <b>POWER</b>                         |                       |
| 1.             | Operating voltage                    | 24 VDC (Loop powered) |
| 2.             | Operating current                    | Bidder to specify     |
| 3.             | Wattage consumption                  | Bidder to specify     |
| <b>D.</b>      | <b>MECHANICAL CHARACTERISTICS</b>    |                       |
| 1.             | Dimensions                           | Bidder to specify     |
| 2.             | Weight                               | Bidder to specify     |
| 3.             | Material of Enclosure                | Non Corrosive         |
| 4.             | Colour                               | Bidder to specify     |
| <b>E.</b>      | <b>ENVIRONMENTAL CHARACTERISTICS</b> |                       |
| 1.             | Ambient temperature range            | 0-50°C                |
| 2.             | Humidity range                       | 95%                   |
| <b>F.</b>      | <b>APPROVAL / CERTIFICATE</b>        |                       |
| 1.             | UL/ FM/ VDS/ EN-54/ LPCB             | Required              |

#### 8.2.4.5. Fire Alarm Multi-Sensor Detector Specification

| <b>Sr. No.</b> | <b>Description</b>              | <b>Requirement</b>                                                                      |
|----------------|---------------------------------|-----------------------------------------------------------------------------------------|
| <b>A.</b>      | <b>GENERAL</b>                  |                                                                                         |
| 1.             | Make                            | Bidder to specify                                                                       |
| 2.             | Model No                        | Bidder to specify                                                                       |
| <b>B.</b>      | <b>DETECTOR CHARACTERISTICS</b> |                                                                                         |
| 1.             | Type                            | Microprocessor based, combination of smoke and heat detector (Fixed and Rate of Rise of |

| <b>Sr. No.</b> | <b>Description</b>                          | <b>Requirement</b>                                                                                                                                                                                                                                                                                                  |
|----------------|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                |                                             | Temperature type)                                                                                                                                                                                                                                                                                                   |
| 2.             | Addressable                                 | Required                                                                                                                                                                                                                                                                                                            |
| 3.             | LED Status                                  | Multi colored, multi status LED                                                                                                                                                                                                                                                                                     |
| 4.             | Remote / Local Test Capability              | Required                                                                                                                                                                                                                                                                                                            |
| 5.             | Response Time                               | The maximum allowable response delay from activation of an initiating device to receipt and display by the receiver/ fire alarm control unit shall be 10 seconds                                                                                                                                                    |
| 6.             | Terminals for connecting response indicator | Required<br>(Bidder to consider fault isolator module after every 10 Nos. detectors/ devices for UL/ FM offered panel or inbuilt fault isolator base shall be provided for EN-54/ VDS/ LPCB offered panel. Bidder to provide necessary provision to connect the response indicator for any type of fire detectors.) |
| 7.             | Sensor Coverage                             | Bidder to specify                                                                                                                                                                                                                                                                                                   |
| 8.             | Alarm set point for Heat                    | For fixed temperature type - 55°C<br>For rate of rise of temp. type 7°C / Minutes                                                                                                                                                                                                                                   |
| 9.             | Sensitivity Adjustment                      | Required                                                                                                                                                                                                                                                                                                            |
| 10.            | Immune to false alarm                       | Required                                                                                                                                                                                                                                                                                                            |
| 11.            | Cabling                                     | Two wire signal line circuit style 6, class 'A' as per NFPA-72                                                                                                                                                                                                                                                      |
| 12.            | Built-in isolator                           | Not Required<br><br>Note: In case of built-in isolator requirement the approval/ certification shall be VDS/ EN-54/ LPCB else UL/ FM approval/ certification shall be applicable.                                                                                                                                   |
| <b>C.</b>      | <b>POWER</b>                                |                                                                                                                                                                                                                                                                                                                     |
| 1.             | Operating voltage                           | 24 VDC (Loop powered)                                                                                                                                                                                                                                                                                               |

| Sr. No.   | Description                          | Requirement       |
|-----------|--------------------------------------|-------------------|
| 2.        | Operating current                    | Bidder to specify |
| 3.        | Wattage consumption                  | Bidder to specify |
| <b>D.</b> | <b>MECHANICAL CHARACTERISTICS</b>    |                   |
| 1.        | Dimensions                           | Bidder to specify |
| 2.        | Weight                               | Bidder to specify |
| 3.        | Material of Enclosure                | Non Corrosive     |
| 4.        | Colour                               | Bidder to specify |
| <b>E.</b> | <b>ENVIRONMENTAL CHARACTERISTICS</b> |                   |
| 1.        | Ambient temperature range            | 0-50°C            |
| 2.        | Humidity range                       | 95%               |
| <b>F.</b> | <b>APPROVAL / CERTIFICATE</b>        |                   |
| 1.        | UL/ FM/ VDS/ EN-54/ LPCB             | Required          |

#### 8.2.4.6. Fire Alarm Beam Type Smoke Detector Specification

| Sr. No.   | Description                     | Requirement                                                                                                                                                   |
|-----------|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>A.</b> | <b>GENERAL</b>                  |                                                                                                                                                               |
| 1.        | Make                            | Bidder to specify                                                                                                                                             |
| 2.        | Model No                        | Bidder to specify                                                                                                                                             |
| <b>B.</b> | <b>DETECTOR CHARACTERISTICS</b> |                                                                                                                                                               |
| 1.        | Type                            | <div> Reflective beam type smoke detector <input checked="" type="checkbox"/> </div> <div> Projected beam type smoke detector <input type="checkbox"/> </div> |
| 2.        | Addressable                     | Required                                                                                                                                                      |

| Sr. No.   | Description                       | Requirement                                                                                                                                                      |
|-----------|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|           |                                   | Note: In case bidders offers conventional beam detector, same shall be made addressable by providing addressable monitor module.                                 |
| 3.        | LED Status                        | Multi colored, multi status LED                                                                                                                                  |
| 4.        | Remote / Local Test Capability    | Required                                                                                                                                                         |
| 5.        | Response Time                     | The maximum allowable response delay from activation of an initiating device to receipt and display by the receiver/ fire alarm control unit shall be 10 seconds |
| 6.        | Sensor Coverage                   | Bidder to specify                                                                                                                                                |
| 7.        | Alarm set point for Heat          | Bidder to specify                                                                                                                                                |
| 8.        | Sensitivity Adjustment            | Required                                                                                                                                                         |
| 9.        | Immune to false alarm             | Required                                                                                                                                                         |
| 10.       | Cabling                           | Two wire signal line circuit style 6, class 'A' as per NFPA-72                                                                                                   |
| <b>C.</b> | <b>POWER</b>                      |                                                                                                                                                                  |
| 1.        | Operating voltage                 | 24 VDC                                                                                                                                                           |
| 2.        | Operating current                 | Bidder to specify                                                                                                                                                |
| 3.        | Wattage consumption               | Bidder to specify                                                                                                                                                |
| <b>D.</b> | <b>MECHANICAL CHARACTERISTICS</b> |                                                                                                                                                                  |
| 1.        | Dimensions                        | Bidder to specify                                                                                                                                                |
| 2.        | Weight                            | Bidder to specify                                                                                                                                                |
| 3.        | Material of Enclosure             | Non Corrosive                                                                                                                                                    |
| 4.        | Colour                            | Bidder to specify                                                                                                                                                |
| 5.        | Spacing & mounting                | As per the norms of NFPA 72,2010 edition & as per manufacturer's instructions                                                                                    |
| <b>E.</b> | <b>ENVIRONMENTAL</b>              |                                                                                                                                                                  |

| Sr. No.   | Description                   | Requirement                   |
|-----------|-------------------------------|-------------------------------|
|           | <b>CHARACTERISTICS</b>        |                               |
| 1.        | Ambient temperature range     | 0-50°C                        |
| 2.        | Humidity range                | 95%                           |
| 3.        | Weather protection class      | For indoor application: IP 54 |
| <b>F.</b> | <b>APPROVAL / CERTIFICATE</b> |                               |
| 1.        | UL/ FM/ VDS/ EN-54/ LPCB      | Required                      |

#### 8.2.4.7. Fire Alarm Smoke Detector Specification

| Sr. No.   | Description                     | Requirement                                                                                                                                                                                                                                                                   |
|-----------|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>A.</b> | <b>GENERAL</b>                  |                                                                                                                                                                                                                                                                               |
| 1.        | Make                            | Bidder to specify                                                                                                                                                                                                                                                             |
| 2.        | Model No                        | Bidder to specify                                                                                                                                                                                                                                                             |
| <b>B.</b> | <b>DETECTOR CHARACTERISTICS</b> |                                                                                                                                                                                                                                                                               |
| 1.        | Type                            | Microprocessor Base- Photoelectric Type                                                                                                                                                                                                                                       |
| 2.        | Addressable                     | Required                                                                                                                                                                                                                                                                      |
| 3.        | LED Status                      | Multi colored, multi status LED                                                                                                                                                                                                                                               |
| 4.        | Remote / Local Test Capability  | Required                                                                                                                                                                                                                                                                      |
| 5.        | Response Time                   | 10 Seconds Max. For Full Loaded Panel. Detectors Response Time Shall Be Suitable For The Same.<br><br>Note: The maximum allowable response delay from activation of an initiating device to receipt and display by the receiver/ fire alarm control unit shall be 10 seconds. |
| 6.        | Terminals for Connecting        | Required                                                                                                                                                                                                                                                                      |

| Sr. No.   | Description                          | Requirement                                                                                    |
|-----------|--------------------------------------|------------------------------------------------------------------------------------------------|
|           | Response Indicator                   |                                                                                                |
| 7.        | Sensor Coverage                      | Bidder to specify                                                                              |
| 8.        | Sensitivity Adjustment               | Required                                                                                       |
| 9.        | Immune to false alarm                | Required                                                                                       |
| 10.       | Cabling                              | Two wire signal line circuit style 6, class 'A' as per NFPA-72                                 |
| 11.       | Detector Mounting Base               | With Isolator <input type="checkbox"/><br>Without Isolator <input checked="" type="checkbox"/> |
| <b>C.</b> | <b>POWER</b>                         |                                                                                                |
| 1.        | Operating voltage                    | Bidder to specify                                                                              |
| 2.        | Operating current                    | Bidder to specify                                                                              |
| 3.        | Wattage consumption                  | Bidder to specify                                                                              |
| 4.        | Loop Powered                         | Required                                                                                       |
| <b>D.</b> | <b>MECHANICAL CHARACTERISTICS</b>    |                                                                                                |
| 1.        | Dimensions                           | Bidder to specify                                                                              |
| 2.        | Weight                               | Bidder to specify                                                                              |
| 3.        | Material of Enclosure                | Non Corrosive                                                                                  |
| 4.        | Colour                               | Bidder to specify                                                                              |
| 5.        | Spacing & mounting                   | As per the norms of NFPA 72,2010 edition & as per manufacturer's instructions                  |
| <b>E.</b> | <b>ENVIRONMENTAL CHARACTERISTICS</b> |                                                                                                |
| 1.        | Ambient temperature range            | 0-50°C                                                                                         |
| 2.        | Humidity range                       | 95%                                                                                            |
| 3.        | Weather protection class             | For indoor application: IP 65                                                                  |

| Sr. No.   | Description                   | Requirement |
|-----------|-------------------------------|-------------|
| <b>F.</b> | <b>APPROVAL / CERTIFICATE</b> |             |
| 1.        | UL/ FM/ VDS/ EN-54/ LPCB      | Required    |

#### 8.2.4.8. Fire Alarm Monitor Module Specification

| Sr. No.   | Description                            | Requirement                                                                                                                                                                       |
|-----------|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>A.</b> | <b>GENERAL</b>                         |                                                                                                                                                                                   |
| 1.        | Make                                   | Bidder to specify                                                                                                                                                                 |
| 2.        | Model No                               | Bidder to specify                                                                                                                                                                 |
| <b>B.</b> | <b>MODULE CHARACTERISTICS</b>          |                                                                                                                                                                                   |
| 1.        | Application                            | To normally open dry-contact alarm activation devices                                                                                                                             |
| 2.        | Type                                   | Microprocessor Based                                                                                                                                                              |
| 3.        | Addressable                            | Required                                                                                                                                                                          |
| 4.        | Number of relay outputs in each module | 1 No. <input checked="" type="checkbox"/><br>2 No. <input type="checkbox"/><br>4 No. <input type="checkbox"/><br>8 No. <input type="checkbox"/>                                   |
| 5.        | Response time                          | The maximum allowable response delay from activation of an initiating device to receipt and display by the receiver/ fire alarm control unit shall be 10 seconds                  |
| 6.        | Cabling                                | Two wire signal line circuit style 6, class 'A' as per NFPA-72                                                                                                                    |
| 7.        | Built-in isolator                      | Not Required<br><br>Note: In case of built-in isolator requirement the approval/ certification shall be VDS/ EN-54/ LPCB else UL/ FM approval/ certification shall be applicable. |

| <b>Sr. No.</b> | <b>Description</b>                  | <b>Requirement</b>                  |
|----------------|-------------------------------------|-------------------------------------|
| <b>C.</b>      | <b>POWER</b>                        |                                     |
| 1.             | Operating voltage                   | 24 VDC (Loop powered)               |
| 2.             | Operating current                   | Bidder to specify                   |
| 3.             | Wattage consumption                 | Bidder to specify                   |
| <b>D.</b>      | <b>MECHANICAL CHARACTERISTICS</b>   |                                     |
| 1.             | Dimensions                          | Bidder to specify                   |
| 2.             | Weight                              | Bidder to specify                   |
| 3.             | Material of Enclosure               | Non Corrosive                       |
| <b>E.</b>      | <b>ENVIRONMENTAL CHARCTERISTICS</b> |                                     |
| 1.             | Ambient temperature range           | 0-50°C                              |
| 2.             | Humidity range                      | 95%                                 |
| 3.             | Enclosure weather protection class  | For Indoor IP54<br>For Outdoor IP65 |
| 4.             | Explosion proof enclosure           | Bidder to specify                   |
| 5.             | Hazardous area classification       | Bidder to specify                   |
| <b>F.</b>      | <b>APPROVAL / CERTIFICATE</b>       |                                     |
| 1.             | UL/ FM/ VDS/ EN-54/ LPCB            | Required                            |

#### 8.2.4.9. Manual Call Point (MCP) Specification

| <b>Sr. No.</b> | <b>Description</b> | <b>Requirement</b> |
|----------------|--------------------|--------------------|
| <b>A.</b>      | <b>GENERAL</b>     |                    |



| Sr. No.   | Description                                                                                     | Requirement                                                                                                                                                                       |
|-----------|-------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1.        | Make                                                                                            | Bidder to specify                                                                                                                                                                 |
| 2.        | Model No                                                                                        | Bidder to specify                                                                                                                                                                 |
| <b>B.</b> | <b>MCP CHARACTERISTICS</b>                                                                      |                                                                                                                                                                                   |
| 1.        | Type                                                                                            | Break glass type <input checked="" type="checkbox"/><br>Push and pull type <input checked="" type="checkbox"/><br>Lift and pull type <input checked="" type="checkbox"/>          |
| 2.        | Clear and visible operating instructions on the body                                            | Required                                                                                                                                                                          |
| 3.        | The word "FIRE" indication on the front of MCP in raised letters, 1.75 inches (44 mm) or larger | Required                                                                                                                                                                          |
| 4.        | Response Time                                                                                   | The maximum allowable response delay from activation of an initiating device to receipt and display by the receiver/ fire alarm control unit shall be 10 seconds                  |
| 5.        | Cabling                                                                                         | Two wire signal line circuit style 6, class 'A' as per NFPA-72                                                                                                                    |
| 6.        | Built-in isolator                                                                               | Not Required<br><br>Note: In case of built-in isolator requirement the approval/ certification shall be VDS/ EN-54/ LPCB else UL/ FM approval/ certification shall be applicable. |
| <b>C.</b> | <b>POWER</b>                                                                                    |                                                                                                                                                                                   |
| 1.        | Operating voltage                                                                               | 24 VDC (Loop powered)                                                                                                                                                             |
| 2.        | Operating current                                                                               | Bidder to specify                                                                                                                                                                 |
| 3.        | Wattage consumption                                                                             | Bidder to specify                                                                                                                                                                 |
| <b>D.</b> | <b>MECHANICAL CHARACTERISTICS</b>                                                               |                                                                                                                                                                                   |
| 1.        | Dimensions                                                                                      | Bidder to specify                                                                                                                                                                 |
| 2.        | Weight                                                                                          | Bidder to specify                                                                                                                                                                 |

| <b>Sr. No.</b> | <b>Description</b>                  | <b>Requirement</b>                      |
|----------------|-------------------------------------|-----------------------------------------|
| 3.             | Material of Enclosure               | Non Corrosive                           |
| 4.             | Colour                              | Bidder to specify                       |
| <b>E.</b>      | <b>ENVIRONMENTAL CHARCTERISTICS</b> |                                         |
| 1.             | Ambient temperature range           | 0-50°C                                  |
| 2.             | Humidity range                      | 95%                                     |
| 3.             | Enclosure weather protection class  | For Indoor IP54<br>For Outdoor IP65     |
| 4.             | Explosion proof enclosure           | Bidder to specify                       |
| 5.             | Hazardous area classification       | Bidder to specify                       |
| <b>F.</b>      | <b>APPROVAL / CERTIFICATE</b>       |                                         |
| 1.             | UL/ FM/ VDS/ EN-54/ LPCB            | Required                                |
| 2.             | ATEX/ CCOE                          | Not Required (For Explosion Proof type) |

8.2.4.10. SOUNDER cum STROBE Specification

| <b>Sr. No.</b> | <b>Description</b>                     | <b>Requirement</b>                                                                                                                        |
|----------------|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| <b>A.</b>      | <b>GENERAL</b>                         |                                                                                                                                           |
| 1.             | Make                                   | Bidder to specify                                                                                                                         |
| 2.             | Model No                               | Bidder to specify                                                                                                                         |
| <b>B.</b>      | <b>SOUNDER/ STROBE CHARACTERISTICS</b> |                                                                                                                                           |
| 1.             | Type                                   | Loop Powered <input type="checkbox"/><br>Externally Powered <input checked="" type="checkbox"/><br>Note: Externally powered through FACP. |
| 2.             | Addressable                            | Required                                                                                                                                  |

| Sr. No.   | Description                       | Requirement                                                                                                                                                                       |
|-----------|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 3.        | Response time                     | The maximum allowable response delay from activation of an initiating device to receipt and display by the receiver/ fire alarm control unit shall be 10 seconds                  |
| 4.        | dB level                          | 90 db at 10 Feet from device                                                                                                                                                      |
| 5.        | Light intensity                   | 15/30/75/110 cd                                                                                                                                                                   |
| 6.        | Number of selectable tones        | Minimum 4                                                                                                                                                                         |
| 7.        | Cabling                           | Two wire signal line circuit style 6, class 'A' as per NFPA-72                                                                                                                    |
| 8.        | Built-in isolator                 | Not Required<br><br>Note: In case of built-in isolator requirement the approval/ certification shall be VDS/ EN-54/ LPCB else UL/ FM approval/ certification shall be applicable. |
| <b>C.</b> | <b>POWER</b>                      |                                                                                                                                                                                   |
| 1.        | Operating voltage                 | 24 VDC                                                                                                                                                                            |
| 2.        | Operating current                 | Bidder to specify                                                                                                                                                                 |
| 3.        | Wattage consumption               | Bidder to specify                                                                                                                                                                 |
| 4.        | Power Supply                      | Bidder to specify                                                                                                                                                                 |
| <b>D.</b> | <b>MECHANICAL CHARACTERISTICS</b> |                                                                                                                                                                                   |
| 1.        | Dimensions                        | Bidder to specify                                                                                                                                                                 |
| 2.        | Weight                            | Bidder to specify                                                                                                                                                                 |
| 3.        | Material of Enclosure             | Non Corrosive                                                                                                                                                                     |
| 4.        | Mounting                          | <div>Wall <input checked="" type="checkbox"/></div> <div>Surface <input type="checkbox"/></div> <div>Structure beam <input type="checkbox"/></div>                                |

| <b>Sr. No.</b> | <b>Description</b>                   | <b>Requirement</b>                                                  |
|----------------|--------------------------------------|---------------------------------------------------------------------|
|                |                                      | Note: - All accessories shall be supplied and erected as applicable |
| <b>E.</b>      | <b>ENVIRONMENTAL CHARACTERISTICS</b> |                                                                     |
| 1.             | Ambient temperature range            | 0-50°C                                                              |
| 2.             | Humidity range                       | 95%                                                                 |
| 3.             | Weather protection class             | IP 65                                                               |
| <b>F.</b>      | <b>APPROVAL / CERTIFICATE</b>        |                                                                     |
| 1.             | UL/ FM/ VDS/ EN-54/ LPCB             | Required                                                            |
| 2.             | ATEX/ CCOE                           | Not Required (For explosion proof type)                             |

8.2.4.11. Fire Alarm Fault Isolator Module Specification

| <b>Sr. No.</b> | <b>Description</b>                          | <b>Requirement</b>   |
|----------------|---------------------------------------------|----------------------|
| <b>A.</b>      | <b>GENERAL</b>                              |                      |
| 1.             | Make                                        | Bidder to specify    |
| 2.             | Model No                                    | Bidder to specify    |
| <b>B.</b>      | <b>MODULE CHARACTERISTICS</b>               |                      |
| 1.             | Type                                        | Microprocessor Based |
| 2.             | Addressable                                 | Required             |
| 3.             | After every numbers of detector/devices     | 18 nos.              |
| 4.             | Automatically resets on correction of short | Required             |
| 5.             | Wide viewing angle of LED                   | Required             |

| <b>Sr. No.</b> | <b>Description</b>                   | <b>Requirement</b>                                             |
|----------------|--------------------------------------|----------------------------------------------------------------|
| 6.             | Cabling                              | Two wire signal line circuit style 6, class 'A' as per NFPA-72 |
| <b>C.</b>      | <b>POWER</b>                         |                                                                |
| 1.             | Operating voltage                    | 24 VDC (Loop powered)                                          |
| 2.             | Operating current                    | Bidder to specify                                              |
| 3.             | Wattage consumption                  | Bidder to specify                                              |
| <b>D.</b>      | <b>MECHANICAL CHARACTERISTICS</b>    |                                                                |
| 1.             | Dimensions                           | Bidder to specify                                              |
| 2.             | Weight                               | Bidder to specify                                              |
| 3.             | Material of Enclosure                | Non Corrosive                                                  |
| <b>E.</b>      | <b>ENVIRONMENTAL CHARACTERISTICS</b> |                                                                |
| 1.             | Ambient temperature range            | 0-50°C                                                         |
| 2.             | Humidity range                       | 95%                                                            |
| 3.             | Enclosure Weather protection class   | For Indoor IP54<br>For Outdoor IP65                            |
| <b>F.</b>      | <b>APPROVAL / CERTIFICATE</b>        |                                                                |
| 1.             | UL/ FM/ VDS                          | Required                                                       |

### 8.2.5 Interlocks for FDAS

8.2.5.1. Minimum 8 nos. of Potential free contacts shall be provided from the FDAS Panel through relay module for following Interlocks in the event of fire:

- a. Building Management System
- b. Sprinkler / Pumps System
- c. Access control system

### 8.2.6 Installation

- 8.2.6.1. Installation shall be in accordance with the IS 2189, NEC, NFPA 72, local and state codes, as shown on the drawings, and as recommended by the major equipment manufacturer.
- 8.2.6.2. The complete installation hardware and cabling for FDAS system is in scope of Contractor.
- 8.2.6.3. All conduit, junction boxes, conduit supports and hangers shall be concealed in finished areas and may be exposed in unfinished areas.
- 8.2.6.4. Detectors shall not be installed prior to the system programming and test period.
- 8.2.6.5. If construction is ongoing during this period, measures shall be taken to protect smoke detectors from contamination and physical damage.
- 8.2.6.6. All fire detection and alarm system devices, control panels and remote annunciators shall be flush mounted when located in finished areas and may be surface mounted when located in unfinished areas.
- 8.2.6.7. Manual fire alarm boxes shall be suitable for surface mounting or semi-flush mounting and shall be installed not less than 42 inches (1067 mm), nor more than 48 inches (122 mm) above the finished floor.

#### **8.2.7 Power Supply**

- 8.2.7.1. One feeder of 240 V AC, UPS power shall be made available in the UPS for the Fire Alarm & Detection System. The Contractor shall lay cables from UPS to the FDAS system. All the other necessary power supply required for the functioning of the FDAS system shall be derived by the contractor from this power supply.

#### **8.2.8 Power Cables**

- a. The specifications for power cables shall be as below:
- b. Conductor material: Stranded Copper
- c. Insulation Material: Cables shall be PVC insulated as per application.
- d. Voltage grade: 1100 V
- e. Armouring: All power cables shall be GI wire armoured.
- f. Sheathing Material: Inner & Outer sheaths shall be FRLS PVC

#### **8.2.9 I&C Cables**

- 8.2.9.1. All multipair & multicore cables shall be provided with 20% (of used pairs/cores) spare pairs & cores for future use. Cables for Ethernet connectivity shall be CAT 6 cables which shall be armoured. Cables for RS-485 connection shall be twisted pair cables, shielded & armoured.
- 8.2.9.2. Cable Glands
  - All cable glands shall be of double compression type with high quality neoprene gaskets. Cable glands shall be of brass with nickel plating.
- 8.2.9.3. Cable trays

Cable trays shall be perforated of hot dipped galvanized steel. Cable trays shall have 50 mm collar height. The cable trays shall be covered type.

The cables coming in the beam area shall be allowed to pass through conduits.

The cables laid between two different buildings shall be laid in conduits in cable trenches.

I&C Cables and power cables shall be routed through different cable trays to avoid Electromagnetic Interference.

Minimum 300 mm distance shall be maintained between I&C cables / 24 V DC power supply cables and 415 V AC/ 230 V AC power cables.

All cable trays shall be provided with 20% spare space for future use.

#### 8.2.9.4. Fire proof Sealing for Cable penetration

Cables/ cable tray openings in walls and floors or through pipe sleeves from one area to another or one elevation to another shall be sealed by a fireproof sealing compound. The fire-proof sealing compound shall effectively prevent the spread of fire from the flaming to non-flaming side, in the event of fire.

#### 8.2.9.5. The specifications of cables shall be as mentioned below.

|                                   |     | Description                       |    | Power Cable                                     | Control cable      | Signal cable                                                                                |      | Triad Cable           |      |  |
|-----------------------------------|-----|-----------------------------------|----|-------------------------------------------------|--------------------|---------------------------------------------------------------------------------------------|------|-----------------------|------|--|
| GENERAL                           | 1.  | Type                              |    | Armoured                                        | Screened, armoured | Twisted, screened, armoured                                                                 |      |                       |      |  |
|                                   | 2.  | Voltage grade                     |    | 1100 V                                          | 1100 V             | 660 V                                                                                       |      |                       |      |  |
| CONDUCTOR                         | 3.  | Material                          |    | Annealed Tinned Copper                          |                    |                                                                                             |      |                       |      |  |
|                                   | 4.  | Shape of conductor                |    | Stranded circular                               |                    |                                                                                             |      |                       |      |  |
|                                   | 5.  | Size                              |    |                                                 |                    |                                                                                             |      |                       |      |  |
|                                   | 6.  | No. of strands                    |    | 7 nos.                                          |                    |                                                                                             |      |                       |      |  |
| PRIMARY INSULATION                | 7.  | Material                          |    | Extruded Polyethylene (PE) as per BS-EN 50290-2 |                    |                                                                                             |      |                       |      |  |
|                                   | 8.  | Thickness of insulation (Nominal) |    | 0.8 mm                                          |                    |                                                                                             |      |                       |      |  |
|                                   | 9.  | Colour code                       |    |                                                 | Grey               | White +ve, Black –ve (For each pair)                                                        |      | Brown, Black and blue |      |  |
| INDIVIDUAL PAIRS / TRIADS         | 10. | Twist                             |    | NA                                              | NA                 | Min. 10 nos. twist / meter for each pair                                                    |      |                       |      |  |
|                                   | 11. | Identification                    |    | NA                                              | NA                 | Numbers at not more than 250mm length                                                       |      |                       |      |  |
| INDIVIDUAL PAIR / TRIAD SCREENING | 12. | Material                          |    | NA                                              | NA                 | AL Mylar tape applied helically with metallic side down in contact with drain wire          |      |                       |      |  |
|                                   | 13. | Tape thickness                    |    | NA                                              | NA                 | Minimum 0.075 mm thick for single pair cables<br>Minimum 0.05 mm thick for multipair cables |      |                       |      |  |
|                                   | 14. | Overlap                           | NA |                                                 | NA                 | Min. 25%                                                                                    | 100% | Min. 25%              | 100% |  |
|                                   | 15. | Polyester tape                    |    | NA                                              | NA                 | Polyester tape of 0.05 mm thick each. two tapes with min. 25% overlap & 100% coverage       |      |                       |      |  |

|                   |                       |                                     |                      |                                                                                                                                                                              |                                                                                    |       |                                                          |       |          |      |
|-------------------|-----------------------|-------------------------------------|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------|----------------------------------------------------------|-------|----------|------|
|                   | 16.                   | <u>Drain wire</u>                   |                      |                                                                                                                                                                              |                                                                                    |       |                                                          |       |          |      |
|                   | 17.                   | Material                            |                      | NA                                                                                                                                                                           | NA                                                                                 |       | Annealed Tinned Copper                                   |       |          |      |
|                   | 18.                   | Size                                |                      | NA                                                                                                                                                                           | NA                                                                                 |       | 0.5mm <sup>2</sup> , with 7 strands, each of 0.3 mm dia. |       |          |      |
| OVERALL SCREENING | 19.                   | Material                            |                      | NA                                                                                                                                                                           | AL Mylar tape applied helically with metallic side down in contact with drain wire |       |                                                          |       |          |      |
|                   | 20.                   | Tape thickness                      |                      | NA                                                                                                                                                                           | Minimum 0.075 mm                                                                   |       |                                                          |       |          |      |
|                   | 21.                   | Overlap                             | Coverage             | NA                                                                                                                                                                           | Min. 25%                                                                           | 100 % | Min. 25%                                                 | 100 % | Min. 25% | 100% |
|                   | 22.                   | <u>Drain wire</u>                   |                      | NA                                                                                                                                                                           |                                                                                    |       |                                                          |       |          |      |
|                   | 23.                   | Material                            |                      | NA                                                                                                                                                                           | Annealed Tinned Copper                                                             |       |                                                          |       |          |      |
|                   | 24.                   | Size                                |                      | NA                                                                                                                                                                           | 0.5mm <sup>2</sup> , with 7 strands, each of 0.3 mm dia.                           |       |                                                          |       |          |      |
| BINDER TAPE       | 25.                   | Type                                |                      | Non-Hygroscopic, two tapes with min. overlap of 25% & 100% coverage                                                                                                          |                                                                                    |       |                                                          |       |          |      |
|                   | 26.                   | Tape Thickness                      |                      | Each tape of min. 0.023 mm thick                                                                                                                                             |                                                                                    |       |                                                          |       |          |      |
| INNER SHEATH      | 27.                   | Material                            |                      | Extruded flame retardant PVC type ST-2, 90°C as per IS-5831 , oxygen index over 30% and temp. index over 250 deg C.                                                          |                                                                                    |       |                                                          |       |          |      |
|                   | 28.                   | Thickness (Nominal)                 |                      | As per BS-EN 50288 part 7 (Note-2)                                                                                                                                           |                                                                                    |       |                                                          |       |          |      |
|                   | 29.                   | Colour                              |                      | Black                                                                                                                                                                        |                                                                                    |       |                                                          |       |          |      |
|                   | 30.                   | Diameter over inner sheath          |                      | Bidder to Specify<br>Note:- Cable dimensions (OD under armour, OD over armour, overall OD) shall be as per BS-EN-50288-7. Maximum tolerance in dimensions shall be +/- 2 mm. |                                                                                    |       |                                                          |       |          |      |
|                   | 31.                   | Rip Chord                           |                      | Non-metallic required under inner sheath                                                                                                                                     |                                                                                    |       |                                                          |       |          |      |
|                   | ARMOURING             | 32.                                 | Material             |                                                                                                                                                                              | Galvanised steel                                                                   |       |                                                          |       |          |      |
| 33.               |                       | Size                                |                      | As per BS-EN 50288                                                                                                                                                           |                                                                                    |       |                                                          |       |          |      |
| 34.               |                       | Diameter over armour                |                      | Bidder to Specify<br>Note:- Cable dimensions (OD under armour, OD over armour, overall OD) shall be as per BS-EN-50288-7. Maximum tolerance in dimensions shall be +/- 2 mm. |                                                                                    |       |                                                          |       |          |      |
| OUTER SHEATH      | 35.                   | Material                            |                      | Extruded flame retardant PVC IEC-332, Type ST-2, 90°C as per IS-5831                                                                                                         |                                                                                    |       |                                                          |       |          |      |
|                   | 36.                   | Thickness (Nominal)                 |                      | As per BS-EN 50288 part 7 (Note-2)                                                                                                                                           |                                                                                    |       |                                                          |       |          |      |
|                   | 37.                   | Colour                              |                      | Black                                                                                                                                                                        | Black, for Intrinsic safe light blue                                               |       |                                                          | Black |          |      |
|                   | 38.                   | Overall Diameter                    |                      | Bidder to Specify<br>Note:- Cable dimensions (OD under armour, OD over armour, overall OD) shall be as per BS-EN-50288-7. Maximum tolerance in dimensions shall be +/- 2 mm. |                                                                                    |       |                                                          |       |          |      |
|                   | 39.                   | Cable identification                |                      | Running length printed at min. every 1 metre interval                                                                                                                        |                                                                                    |       |                                                          |       |          |      |
|                   | ELECTRICAL PROPERTIES | 40.                                 | Conductor resistance |                                                                                                                                                                              | As per BS-EN 50288 part 7                                                          |       |                                                          |       |          |      |
| 41.               |                       | Drain wire resistance               |                      | NA                                                                                                                                                                           | ≤ 30 ohms/km @ 20 deg c. Noise rejection ratio ≥ 76 db.                            |       |                                                          |       |          |      |
| 42.               |                       | Insulation resistance               |                      | 1 G Ω/KM as per BS EN 50288                                                                                                                                                  |                                                                                    |       |                                                          |       |          |      |
| 43.               |                       | Mutual capacitance                  |                      | NA                                                                                                                                                                           | ≤ 110 nF/KM @ 1 KHz                                                                |       |                                                          |       |          |      |
| 44.               |                       | Capacitance between core and screen |                      | NA                                                                                                                                                                           | ≤ 400 nF/KM @ 1 KHz                                                                |       |                                                          |       |          |      |
| 45.               |                       | Inductance                          |                      | NA                                                                                                                                                                           | ≤ 1 mH/KM @ 1 kHz                                                                  |       |                                                          |       |          |      |
| 46.               |                       | L/R Ratio                           |                      | NA                                                                                                                                                                           | As per BS-EN 50288 part 7                                                          |       |                                                          |       |          |      |



## **8.2.10 Panels Accessories & Wiring**

### **8.2.10.1. Wiring**

All inter cubical and internal wiring for all panels shall be carried out with 1100V grade, stranded tinned copper conductors with PVC insulation. The minimum size of the stranded copper conductor used for the panel wiring shall be 0.5 mm<sup>2</sup> for analog signals and 1.0 mm<sup>2</sup> for commands. For power supply, the conductor size shall be provided as per the load rating (min. 2.5 sq. mm for 230 V AC). Control & Power wiring shall be segregated and routed in PVC troughs. Different colour wires shall be used for different voltages.

Engraved core identification plastic ferrules, marked to correspond with the panel-wiring diagram shall be fitted at both ends of each wire. Cross ferruling shall be done. This shall also be applicable for fibre optic cable & cores.

All spare contacts and spare terminals of the panel mounted equipment and devices shall be wired to the terminal blocks.

### **8.2.10.2. Plug Points and Interior Lighting**

A 5/15 Amp 230V, 1 phase, 50 Hz, AC 3 pin plug point shall be provided in the interior of each panel with ON/OFF control switch and MCB.

For interior lighting 230V, 1 Phase, 50 Hz, 40W compact fluorescent lamp with operating door switch and protective devices like MCBs shall also be provided.

Power supply for all exhaust fans shall be provided through MCBs.

### **8.2.10.3. Relays**

All relays used for interposing shall have at least 2 nos. changeover contacts. The relays shall have status indication and shall be provided with free wheeling diodes.

### **8.2.10.4. Labels**

All front mounted equipment, as well as equipment mounted inside the panels/control desks shall be provided with individual labels with equipment designation engraved. These shall be phenolic overlays (1.6 mm thick) with black background and white lettering and shall be fixed to the panel by stainless steel screws (counter sunk). The panels shall also be provided at the top with a label engraved with the designation. Lettering for panel designation shall be 6 mm.

The minimum lettering size for instrument/device labels shall be 3mm. The lettering on the labels shall be subject to PURCHASER'S approval. Labels of internally mounted equipment shall be clearly visible.

### **8.2.10.5. Earthing**

Each panel shall be provided with a safety ground bus & system ground bus made of copper securely fixed along the inside base of the panels. These buses shall be typically of 25 mm wide and 6 mm thick of copper. The safety ground bus shall be properly secured to the plant safety earthing. All metallic cases/frames of relays, instruments, other panel mounted equipment shall be connected to the safety ground bus and shields & drain wires of signal/control cables shall be connected to the system ground bus by independent copper wires of not less than 2.5 sq. mm. The

system ground bus shall be electrically isolated from AC mains earthing bus. The system ground bus shall be insulated from the panel body. The insulation colour code for earthing wires shall be green with yellow bands.

#### **8.2.11 SUMMARY OF DATA TO BE FURNISHED ALONG WITH BID AND AFTER ACCEPTANCE OF PURCHASE ORDER**

The BIDDER shall ensure the following documentation are prepared and submitted to PURCHASER for his review / record.

##### **8.2.11.1. Technical Bid**

The following drawings/ documents shall be submitted:

- a. Data sheet and catalogs of instruments/ equipments
- b. Dimensional Drawings of Panels along with estimated BOQ for each of the systems.
- c. Overall System Configuration Diagram
- d. Engineering activity and manufacturing schedule giving activity wise breakup to meet the delivery schedule.
- e. Testing & Evaluation plan for the systems offered.

##### **8.2.11.2. Final Documents**

- a. Operation and maintenance manuals.
- b. Quality assurance documentation specific for the project.
- c. Final as built documentation folder containing all items for future reference.

#### **8.2.12 SCHEDULE FOR SUBMISSION OF DATA AND DRAWINGS BY CONTRACTOR (DATA TO BE FURNISHED AFTER THE AWARD OF CONTRACT)**

The CONTRACTOR shall submit the following drawings / documents after award of contract for review & approval. CONTRACTOR shall adhere to the delivery schedule as submitted along with the BID. CONTRACTOR shall also refer to data sheets for list of deliverables to be submitted for various instruments/ panels.

| <u>Sl. No.</u> | <u>Details</u>                                                                                                                   |
|----------------|----------------------------------------------------------------------------------------------------------------------------------|
| (a)            | Bar chart for the design, manufacturing, erection, commissioning, trial operation and performance testing of the system offered. |
| (b)            | Overall System Configuration Diagram indicating all components including networking.                                             |
| (c)            | Unpriced purchase order copy for various bought out /sub                                                                         |

| <u>Sl. No.</u> | <u>Details</u>                                                                                                                                                                                               |
|----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                | contracted equipment / services.                                                                                                                                                                             |
| (d)            | Following drawings for panels:                                                                                                                                                                               |
|                | Front facia layout showing all instruments with cut-outs, bezel dimensions, construction details, foundation details and interior G.A. drawings showing interior layout of various modules, instruments etc. |
|                | Internal wiring diagrams indicating termination details of each component.                                                                                                                                   |
|                | Bill of Material (B.O.M.) indicating tag no, quantity, service & model no. of the various modules/instruments/items.                                                                                         |
| (e)            | FDAS Configuration and Layout drawings.                                                                                                                                                                      |
| (f)            | Data Sheets & catalogues for I&C cables & power cables.                                                                                                                                                      |
| (g)            | Earthing diagrams                                                                                                                                                                                            |
| (h)            | Cable Schedules and Interconnection cable schedules.                                                                                                                                                         |
| (l)            | Load calculations for FDAS system                                                                                                                                                                            |
| (j)            | QAPs for all instruments & panels for each system, I&C cables, Power cables & fibre optic cables.                                                                                                            |
| (k)            | Standard FAT & SAT for the specified systems                                                                                                                                                                 |
| (l)            | ‘As Built’ drawings                                                                                                                                                                                          |
| (m)            | Instruction manual for installation and start-up (for each system)                                                                                                                                           |
| (n)            | System operation and maintenance manual                                                                                                                                                                      |

### **8.2.13 TRAINING**

8.2.13.1.1 No. Contractor’s engineer shall be made available for 2 weeks for assistance in operation, maintenance, tuning & training of Purchaser’s personnel at Site after commissioning of each system.

8.2.13.2. Training shall be required on both hardware & application software development.

## **8.2.14 TESTING, INSTALLATION, COMMISSIONING AND ACCEPTANCE**

### **8.2.14.1. General**

On the basis of guidelines specified in this specification Bidder shall submit their own testing, installation, commissioning and acceptance procedure. The procedure shall include purpose of test, test definition, results expected and acceptance criteria. For software it shall include details of the method, list of tests, sequence of execution, results expected and acceptance criteria.

### **8.2.14.2. Site Acceptance Tests (SAT)**

Full integrated site acceptance test shall be performed before hand over of total system to the PURCHASER. The test shall demonstrate functionality of the entire system supplied & erected by the Contractor. The Contractor shall provide all personnel, test facilities, equipment and tools etc. for the same. All test instruments shall have calibration certificates from approved test house, valid for minimum 6 months. A test procedure is required for approval 2 weeks prior to the schedule start.

### **8.2.14.3. Testing Requirements**

#### **a. Tests on cables**

- Check details are in accordance with the specification.
- Check for physical damage.
- Megger test between each core and armour/sheath (For electrical cables)
- Continuity check including screen continuity (For electrical cables)
- Terminations of the cables at both ends.

#### **b. Fire Alarm System**

- Before energizing the cables and wires, check for correct connections and test for short circuits, ground faults, continuity, and insulation.
- Open initiating device circuits and verify that the trouble signal actuates.
- Open and short signalling line circuits and verify that the trouble signal actuates.
- Open and short notification appliance circuits and verify that trouble signal actuates.
- Ground all circuits and verify response of trouble signals.
- Check presence and audibility of tone at all alarm notification devices.
- Check installation, supervision, and operation of all intelligent smoke detectors using the walk test.
- Each of the alarm conditions that the system is required to detect should be introduced on the system. Verify the proper receipt and the proper processing of the signal at the FDAS PANEL and the correct activation of the control points.
- When the system is equipped with optional features, the manufacturer's manual shall be consulted to determine the proper testing procedures. This is intended to address such items as verifying controls performed by

individually addressed or grouped devices, sensitivity monitoring, verification functionality and similar.

- c. It shall be ensured that erection of all panels is as per approved layout drawings. Checking for tagging/identifications of all the panels shall be done. Checks for continuity and termination of all power, signal, control and fibre optic cables as per approved drawings shall be carried out. All the panels supplied & erected by the Contractor shall be checked at site by carrying out the following tests:
  - Visual & Mechanical testing.
  - Power up tests
  - Checks on incoming voltage and power distribution
  - Checking of incoming power supply to the panels supplied & erected by the Contractor.
  - Switching on the incoming supply to panels by switching on MCCBs/MCBs one after the other.
  - Power 'ON' PCs for Fire Alarm System
  - Demonstration of all system functions for Fire Alarm System
  - Checking of 100% logic as per sequences
  - Checking of all HMI screens, alarms etc.
  - Checking of proper functioning of all Printers with printouts of alarm lists, reports, important alarms etc.
- d. Tests on electrical installation
  - Checking of closing, tripping, supervision and interlocking of control devices.
  - Checking operation of all alarm circuits.
- e. Test on complete control system.
  - On completion, the functioning of all systems shall be tested to demonstrate its correct operation in accordance with the Specification.
  - For testing, the Contractor may provide temporary means to simulate operating conditions, but the system shall not be finally accepted until correct operation has been demonstrated to the satisfaction of the Purchaser.

### **8.2.15 Commissioning**

8.2.15.1. Commissioning Procedure shall be carried out in a methodical sequence as follows

- Start-up,
- Initial running,
- Operability adjustment,
- Stable operation
- Final adjustment

8.2.15.2. The Contractor shall check the operating conditions by constantly monitoring operating data.

8.2.15.3. The Contractor shall specify for each discrete part of the system for which the operational data has to be recorded and the manner in which the data is to be taken. All the operating data shall be recorded, evaluated and submitted to the Purchaser

## **8.2.16 EQUIPMENT & SERVICES TO BE PROVIDED BY THE CONTRACTOR**

8.2.16.1. This specification covers specific requirements of design, preparation of detailed drawings, manufacture, testing at manufacturer's works, inspection at Vendor's/Sub-Vendor's works, packing, forwarding, transportation, transit insurance, delivery at site, installation, testing at site, erection and commissioning of Fire Detection & Alarm System (FDAS) as per specification and data sheets enclosed.

8.2.16.2. The following shall be in the scope of the CONTRACTOR

FDAS comprising of FDAS control panel, initiating devices such as smoke Detectors, heat type Detectors, Manual Call Points (MCP), Sounders, isolators, 1 No. Repeater panel at security gate, software (to be installed in IBMS PC), A4 size monochrome LASER jet Printer, all associated cabling and installation hardware for the system as detailed in the specification and data sheets enclosed.

8.2.16.3. Cabling

a) Contractor shall supply & lay the following cables along with all the installation hardware and accessories:

- UPS to FDAS panel
- FDAS system cabling

b) Cable Trays & Conduits

8.2.16.4. Earthing

- a) Earthing for the entire system to be provided by the Contractor shall be in his scope. Separate electrical & instrumentation earth pits shall be provided by others. This earth pit shall be interconnected with electrical earth pit. Contractor shall connect the safety ground bus & system ground bus for the systems supplied by him to the respective earth pits.
- b) Single point earthing configuration shall be followed for the cable shields i.e. all signal and control cables shields shall to be grounded at one end only to avoid ground loop.

## **8.2.17 EQUIPMENT & SERVICES TO BE PROVIDED BY OTHERS**

8.2.17.1. The following are the equipment and services that shall be provided to the CONTRACTOR:

- a) 240V AC, Feeder (UPS supply), for FDAS system. Contractor shall lay the Power cables from the panel to each system.
- b) Uninterruptible Power supply (Electrical Contractor Scope)

- c) Electrical & Instrument earth Pits.

#### **8.2.18 SPECIFIC REQUIREMENTS / INSTRUCTION TO BIDDERS**

- 8.2.18.1. This is a Unit rate contract. The price/ contract value shall be arrived at based on quantities indicated in Bill of Quantity and unit rates for supply & erection quoted by the Bidder. The break-up of unit prices for various items in Bill of Quantity shall be used for future addition/deletion of the items, if any.
- 8.2.18.2. Contractor shall estimate Cable quantities based on enclosed GA drawings & layouts for bidding purpose only. However the Contractor is advised to visit Site & take actual measurements for arriving at the cable quantities actually required at Site before placement of Order.
- 8.2.18.3. The construction of this facility requires that, all CONTRACTOR'S adhere to good daily housekeeping practices. During construction the CONTRACTOR shall every day, keep all work and storage areas used by them free from accumulation of waste materials. Scrap / rubbish shall be removed from the site to the satisfaction of the PURCHASER. The CONTRACTOR shall maintain a crew to carry out this function without any additional payment.
- 8.2.18.4. The equipment to be supplied and erected under this specification shall be in accordance with specification & data sheets.
- 8.2.18.5. Any item which may not have been specifically mentioned herein but are needed to complete the equipment / system shall also be treated as included and the same shall also be supplied and erected at no extra cost, unless otherwise specifically excluded as indicated.
- 8.2.18.6. The BIDDER shall comply with all systems / parameters wherever they are specified in data sheets. No credit will be given during tender evaluation, if parameters better than those specified are offered by the BIDDER.
- 8.2.18.7. Deviation from the specifications, if acceptable to the PURCHASER in so far as practicable shall be converted to rupee value and added to the bid price to compensate for the deviation from the specification. In determining the rupee value of the deviations, the PURCHASER shall use the parameters consistent with that specific in the documents and specifications and other information as necessary and available to the PURCHASER.
- 8.2.18.8. Bidder's Offer
- a) To enable thorough and fast scrutiny of the BIDDER's offer, BIDDERS are advised to respond all their technical data in the enquiry by clearly marking out their response, wherever they want to provide additional data and / or they deviate from the specified requirements. In case of full compliance, the enquiry specification and data sheets shall remain unaltered. Each data sheet & write up in specification shall be signed and stamped by the BIDDER. This requirement is very important. Non compliance of this by the BIDDER may result in their bid being rejected.
  - b) BIDDER is advised to quote for the complete scope and partial response shall not be entertained. In case of few items which do not directly fall under

BIDDER's manufacturing range and / or not available from indigenous source, BIDDER should take the responsibility upon themselves to arrange to procure them and supply to ensure that their offer is complete in all respects.



## **8.2.19 SPARES AND MAINTENANCE TOOLS AND TACKLES**

### **8.2.19.1. GENERAL**

- a) All spares and maintenance tools and tackles shall be designed to enable maintenance to be carried out in the least time and at the least cost and support resources without affecting the performance and safety aspects.
- b) All the spares and maintenance tools and tackles supplied shall be new and unused.
- c) The VENDOR/CONTRACTOR shall guarantee that before going out of production of spares and maintenance tools and tackles for the equipment furnished, he shall give at least 12 months advance notice to the PURCHASER, so that the latter may order his requirement in one lot, if so desired.

### **8.2.19.2. SPARES**

The BIDDER shall include the following three (3) categories of spares in his scope of supply.

#### **a) START-UP AND COMMISSIONING SPARES**

Spares required for start-up and commissioning of the equipment, plant or system shall be indicated by the BIDDER in 'Schedule of Start-up and Commissioning Spares'. Unit price and total price to be indicated in this schedule are for information only. Total value of such spares shall be included in the quoted price for supply or erection of the equipment, plant or system. For equipment, plant and system for which erection and commissioning is in the CONTRACTOR's scope, quantity of spares actually used during the start-up and commissioning or its total value may be more than that indicated in the BID. No additional amount is payable to the CONTRACTOR on this account.

#### **b) ESSENTIAL SPARES**

Essential spares are those, which are considered necessary by the PURCHASER for three (3) years of trouble-free operation of the equipment, plant or system. These shall be as listed in data sheets A. The BIDDER shall include these in 'Schedule of Essential and Recommended Spares'. Total value of such spares shall not be included in the quoted price for supply or erection of the equipment, plant or system. This value shall be considered for the purpose of the BID evaluation.

#### **c) RECOMMENDED SPARES**

Recommended spares are those, which are considered necessary by the BIDDER for three (3) years of trouble-free operation of the equipment, plant or system in addition to those, specified as 'Essential Spares' by the PURCHASER. Total value of such spares shall not be included in the quoted price for supply or erection of the equipment, plant or system. This value shall be considered for the purpose of the BID evaluation.

- d) All spares supplied shall be strictly inter-changeable with the parts for which these are intended to be replacements. The spares shall be treated and packed for long term storage under the climatic conditions prevailing at the site e.g.,

small items shall be packed in sealed transparent plastic bags with desiccator packs as necessary.

- e) Each spare shall be clearly marked or labelled on the outside of its packing with its description and purpose. When more than one spare is packed in a single case, a general description of the contents shall be shown on the outside of such case and a detailed list enclosed. All cases, containers and other packages shall be suitably marked and numbered for the purposes of identification.

#### 8.2.19.3. MAINTENANCE TOOLS AND TACKLES

- a) The BIDDER shall indicate and include in his scope of supply all the necessary tools, tackles, appliances and lifting devices for the effective maintenance and servicing of the equipment and its components. The BIDDER shall list the maintenance tools and tackles offered by him in 'Schedule of Maintenance Tools and Tackles'. The BIDDER shall also include and supply the minimum maintenance tools and tackles. PURCHASER reserves the right to exclude any of the above items from the VENDOR's/CONTRACTOR's scope of supply and effect price adjustments on the basis of the unit prices quoted. The despatch of tools, tackles, appliances and lifting devices shall be synchronised with the despatch of the related equipment.
- b) Each tool and tackle shall be clearly marked with its size and purpose. Each set of tools and tackles shall be suitably arranged in fitted boxes of mild steel construction, the number of boxes being determined in relation to the layout of the plant in question. The taps, stocks and dies shall be kept in approved mild steel boxes with compartments for individual items. If the weight of any box and its contents is such that it cannot be conveniently carried, it shall be supplied on steerable rubber tyred wheels.
- c) Each tool box shall be provided with a lock and two keys and shall be painted navy blue and clearly marked, in white letters, with the name of the equipment, plant or system.
- d) The tools and tackles with the appropriate boxes, are to be handed over to the
- e) PURCHASER at the time of issue of the taking-over certificate.

### **8.3.CLOSED CIRCUIT TELEVISION SYSTEMS**

#### **8.3.1 Scope of Work**

- 8.3.1.1. This specification covers specific requirements of design, preparation of detailed drawings, manufacture, testing at manufacturer's works, inspection at Vendor's/Sub-Vendor's works, packing, forwarding, transportation, loading, unloading, transit insurance, delivery at site, installation, testing at site and commissioning of CCTV System.
- 8.3.1.2. This Specification and its associated Data Sheets covers the minimum technical requirements for the design, manufacture, supply, testing, installation and commissioning of Close Circuit Television System (CCTV) Equipment, which shall be supplied under this Contract.
- 8.3.1.3. Analog Type Close Circuit Television System (CCTV) is proposed for following locations.
  - a) At Building Entrance (Outdoor type bullet camera varifocal lens weather proof)
  - b) Interior area ( Indoor type dome camera varifocal lens )
  - c) Server/IT room, Fire command centre room ( Indoor type dome camera varifocal lens)
- 8.3.1.4. It is not the intent to specify completely herein all details of design and construction of equipment or materials to be supplied or of services to be rendered. However, the equipment, materials and services shall conform in all respects to high standards of engineering design, workmanship and be capable of performing in continuous commercial operation in a manner acceptable to PURCHASER who will interpret the meaning of drawings and specifications and shall have the power to reject any work or material which in his judgement are not in full accordance therewith.

#### **8.3.2 SYSTEM DESCRIPTION**

- 8.3.2.1. The provision of a CCTV system at the Technology centre, Mumbai is required for operation and security purposes.
- 8.3.2.2. Indoor cameras suitable for both day and night coverage shall be strategically positioned to monitor activities within buildings.
- 8.3.2.3. CCTV Surveillance shall be made available from Fire command centre at First Floor, Admin Building.
- 8.3.2.4. Analog cameras with mounting adapter, Ceiling / wall mount, enclosure and all other accessories shall be provided at various location of New Administration Building. Please refer CCTV System Layout for location of CCTV.

- 8.3.2.5. The design of the CCTV system shall be modular, such that faults and damage experienced in one module does not render the entire system non-functional.
- 8.3.2.6. Indoor equipment shall be with a degree of protection of IP 20, while outdoor equipment shall be with a degree of protection of IP 65.
- 8.3.2.7. It shall be possible to place a camera almost anywhere. There shall be no limitations tied to physical inputs or frame grabbers.
- 8.3.2.8. Memory to maintain a record of one month (30 Days) minimum, unless local laws require a longer storage time. By storing the images on hard disks, it shall be possible to erase any old unwanted images automatically.
- 8.3.2.9. The Contractor shall guarantee satisfactory performance of the equipment under stipulated variations of voltage and frequency. The design and manufacture shall be such that equipment/components of same type and rating shall be interchangeable.
- 8.3.2.10. The Contractor shall submit the following data / drawings after award of contract:
- Detailed block schematic / configuration drawing.
  - Power wiring diagram
  - Layout drawing indicating exact location of cameras
  - Cable routing drawings
- 8.3.2.11. All systems and designs must be flexible enough to accommodate changes in size, operation, configuration, and technology updates that may become necessary due to future expansions and requirements

### 8.3.3 SPECIFICATIONS

#### 8.3.3.1. CCTV Camera Specification

| Sr. No.   | Description    | Requirement                                                                        |
|-----------|----------------|------------------------------------------------------------------------------------|
| <b>A.</b> | <b>GENERAL</b> |                                                                                    |
| 1.        | Make           | Bidder to specify                                                                  |
| 2.        | Model No       | Bidder to specify                                                                  |
| 3.        | Camera details | Colour - Day/ Night camera                                                         |
| 4.        | Image sensor   | 1/3" CCD <input type="checkbox"/><br>1/3" CMOS <input checked="" type="checkbox"/> |
| 5.        | Lens type      | Fixed lens <input checked="" type="checkbox"/>                                     |

| Sr. No. | Description                                                                                                | Requirement                                                                                                                                                 |
|---------|------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
|         |                                                                                                            | Varifocal lens <input checked="" type="checkbox"/><br>IR corrected lens <input checked="" type="checkbox"/><br>Motorized zoom lens <input type="checkbox"/> |
| 6.      | Lens format                                                                                                | Minimum 1/3", shall be compatible with image sensor                                                                                                         |
| 7.      | IR cut filter <input checked="" type="checkbox"/><br>or<br>IR corrected lens <input type="checkbox"/>      | Required                                                                                                                                                    |
| 8.      | IRIS                                                                                                       | Automatic                                                                                                                                                   |
| 9.      | F-STOP Range                                                                                               | F/1.4 to F/16                                                                                                                                               |
| 10.     | Sensitivity for usable video                                                                               | Minimum 0.1 Lux @(F1.2,AGC ON),<br>0 Lux with IR                                                                                                            |
| 11.     | Resolution                                                                                                 | WD1 (960×480)                                                                                                                                               |
| 12.     | Automatic shutter                                                                                          | Required                                                                                                                                                    |
| 13.     | Backlight compensation                                                                                     | Required                                                                                                                                                    |
| 14.     | Wide dynamic range (WDR)                                                                                   | Required                                                                                                                                                    |
| 15.     | Signal to noise ratio (SNR)                                                                                | > 50dB (minimum)                                                                                                                                            |
| 16.     | Auto contrast adjustment                                                                                   | Required                                                                                                                                                    |
| 17.     | Horizontal & vertical angle of view                                                                        | 70° Horizontal Minimum                                                                                                                                      |
| 18.     | White balance                                                                                              | Required                                                                                                                                                    |
| 19.     | Video compression<br><br>H.264 <input checked="" type="checkbox"/><br>Motion JPEG <input type="checkbox"/> | Bidder to specify                                                                                                                                           |
| 20.     | Video data rate range                                                                                      | Bidder to specify                                                                                                                                           |

| <b>Sr. No.</b> | <b>Description</b>                         | <b>Requirement</b>                                                                                                                                                            |
|----------------|--------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 21.            | Frames per second for viewing              | 25 FPS                                                                                                                                                                        |
| 22.            | Frames per second for recording            | 15 FPS Minimum                                                                                                                                                                |
| 23.            | Automatic gain control (AGC) 20 dB Minimum | Bidder to specify                                                                                                                                                             |
| 24.            | Power supply                               | UPS Power                                                                                                                                                                     |
| 25.            | Housing                                    | Box camera housing for indoor and outdoor use shall be vandal proof, rugged, durable, industrial grade,<br>M.O.C is cast aluminium, with in-built heater /blower & sunshield. |
| 26.            | IP Rating for indoor camera                | IP52                                                                                                                                                                          |
| 27.            | IP Rating for outdoor camera               | IP66                                                                                                                                                                          |
| 28.            | Operating temperature                      | -10 <sup>0</sup> C to 60 <sup>0</sup> C For Outdoor camera<br>-10 <sup>0</sup> C to 50 <sup>0</sup> C For Indoor camera                                                       |
| 29.            | Operating humidity                         | 95 RH                                                                                                                                                                         |
| 30.            | Mounting accessories                       | All necessary accessories are required                                                                                                                                        |
| 31.            | Tampering alarm                            | Required (tampering such as dis-focus/ move viewing direction/ masking)                                                                                                       |
| 32.            | Spares                                     | 10% or 1 no. (whichever is higher) shall be provided for each type of camera                                                                                                  |
| 33.            | Standards UL, CE                           | Required                                                                                                                                                                      |

#### 8.3.3.2. CCTV MONITOR SPECIFICATION

| <b>Sr. No.</b> | <b>Description</b> | <b>Requirement</b> |
|----------------|--------------------|--------------------|
|----------------|--------------------|--------------------|

| <b>Sr. No.</b> | <b>Description</b>                               | <b>Requirement</b>                                                                |
|----------------|--------------------------------------------------|-----------------------------------------------------------------------------------|
| <b>A.</b>      | <b>GENERAL</b>                                   |                                                                                   |
| 1.             | Make                                             | Bidder to specify                                                                 |
| 2.             | Model No                                         | Bidder to specify                                                                 |
| 3.             | Display size                                     | 32"                                                                               |
| 4.             | Resolution                                       | 1920 X 1080                                                                       |
| 5.             | Dynamic contrast ratio                           | Required                                                                          |
| 6.             | Wide colour enhancer                             | Required                                                                          |
| 7.             | Aspect ratio                                     | 16:9                                                                              |
| 8.             | Audio                                            | Not required                                                                      |
| 9.             | Connectivity:<br>VGA<br>HDMI : 2 ports (Minimum) | Required                                                                          |
| 10.            | Mounting                                         | Wall <input checked="" type="checkbox"/><br>Desk <input type="checkbox"/>         |
| 11.            | Power supply                                     | 110 V AC <input type="checkbox"/><br>230 V AC <input checked="" type="checkbox"/> |
| 12.            | Power consumption                                | Bidder to specify                                                                 |
| 13.            | Dimensions : (W x H x D)                         | Bidder to specify                                                                 |
| 14.            | Weight                                           | Bidder to specify                                                                 |
| 15.            | Accessories                                      | As required for proper operation                                                  |

#### 8.3.3.3. DVR (Digital Video Recorder) SPECIFICATION

| <b>Sr. No.</b> | <b>Description</b> | <b>Requirement</b> |
|----------------|--------------------|--------------------|
| <b>A.</b>      | <b>GENERAL</b>     |                    |

| Sr. No.   | Description                  | Requirement                                                                                                                                           |
|-----------|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1.        | Make                         | Bidder to specify                                                                                                                                     |
| 2.        | Model No                     | Bidder to specify                                                                                                                                     |
| <b>B.</b> | <b>Video Input</b>           |                                                                                                                                                       |
| 1.        | Video Compression            | H.264                                                                                                                                                 |
| 2.        | Video Input                  | <div>4 Channel <input type="checkbox"/></div> <div>8 Channel <input type="checkbox"/></div> <div>16 Channel <input checked="" type="checkbox"/></div> |
| <b>C.</b> | <b>Video Output</b>          |                                                                                                                                                       |
| 1.        | HDMI/VGA Output              | 1920 X 1080                                                                                                                                           |
| 2.        | Encoding Resolution          | WD1                                                                                                                                                   |
| 3.        | Frame Rate                   | 25 FPS or better                                                                                                                                      |
| <b>D.</b> | <b>Hard Disk</b>             |                                                                                                                                                       |
| 1.        | SATA                         | 2 SATA Interface                                                                                                                                      |
| 2.        | Capacity                     | Minimum 30 Days                                                                                                                                       |
| <b>E.</b> | <b>External Interface</b>    |                                                                                                                                                       |
| 1.        | Network Interface            | RJ45                                                                                                                                                  |
| 2.        | Serial Interface             | RS-485                                                                                                                                                |
| 3.        | USB Interface                | USB 2.0                                                                                                                                               |
| <b>F.</b> | <b>Power</b>                 |                                                                                                                                                       |
| 1.        | Power Supply                 | 12 VDC                                                                                                                                                |
| 2.        | Consumption                  | 20 W                                                                                                                                                  |
| <b>G.</b> | <b>Mechanical Properties</b> |                                                                                                                                                       |
| 1.        | Dimensions                   | Bidder to Specify                                                                                                                                     |
| 2.        | Weight                       | Bidder to Specify                                                                                                                                     |



| Sr. No. | Description                     | Requirement                             |
|---------|---------------------------------|-----------------------------------------|
| H.      | <b>Environmental Properties</b> |                                         |
| 1.      | Temperature                     | -10 <sup>0</sup> C to 50 <sup>0</sup> C |
| 2.      | Humidity                        | 95 RH                                   |

### 8.3.4 RECORDING SYSTEM FEATURES

8.3.4.1. The recording system shall be based on DVR (Digital Video Recorder) technology and must support the following features:

- a) Event based recording
- b) Alarm activated recording
- c) Customizable alarm specific recording
- d) Continuous (24 X 7) recording

8.3.4.2. There shall be a facility for regular back-up of the recorded data. Back-up facility shall be deployed automatically when the recorder has reached particular data size or other operator set parameters like date / time etc. The system shall also be provided with a DVD burn /DAT recording facility for backing up particular incident data from the processor.

8.3.4.3. The replay mode shall be password protected and should not interrupt the ongoing recording of video and data.

### 8.3.5 SCHEDULE FOR SUBMISSION OF DATA AND DRAWINGS BY CONTRACTOR (DATA TO BE FURNISHED AFTER THE AWARD OF CONTRACT)

The CONTRACTOR shall submit the following drawings / documents after award of contract for review & approval by Department. CONTRACTOR shall adhere to the delivery schedule as submitted alongwith the BID. CONTRACTOR shall also refer to data sheets for list of deliverables to be submitted for various instruments/ panels.

| <u>Sr. No.</u> | <u>Details</u>                                                                                                                   |
|----------------|----------------------------------------------------------------------------------------------------------------------------------|
| (a)            | Bar chart for the design, manufacturing, erection, commissioning, trial operation and performance testing of the system offered. |
| (b)            | Overall System Configuration Diagram indicating all components including networking.                                             |
| (c)            | Unpriced purchase order copy for various bought out /sub                                                                         |

| <u>Sr.<br/>No.</u> | <u>Details</u>                                                                                                                                                                                                                                                 |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                    | contracted equipment / services.                                                                                                                                                                                                                               |
| (d)                | Following drawings for panels:                                                                                                                                                                                                                                 |
|                    | <ul style="list-style-type: none"> <li>Front facia layout showing all instruments with cut-outs, bezel dimensions, construction details, foundation details and interior G.A. drawings showing interior layout of various modules, instruments etc.</li> </ul> |
|                    | <ul style="list-style-type: none"> <li>Internal wiring diagrams indicating termination details of each component.</li> </ul>                                                                                                                                   |
|                    | <ul style="list-style-type: none"> <li>Bill of Material (B.O.M.) indicating tag no., quantity, service &amp; model no. of the various modules/instruments/items.</li> </ul>                                                                                    |
| (e)                | Make, Model No., Catalogues, data sheets for each item/ sub-item of CCTV System.                                                                                                                                                                               |
| (f)                | CCTV Configuration and Layout drawings.                                                                                                                                                                                                                        |
| (g)                | Data Sheets & catalogues for I&C cables & power cables.                                                                                                                                                                                                        |
| (i)                | Earthing diagrams                                                                                                                                                                                                                                              |
| (j)                | Cable Schedules and Interconnection cable schedules.                                                                                                                                                                                                           |
| (k)                | Load calculations for each system                                                                                                                                                                                                                              |
| (l)                | QAPs for all instruments & panels for each system, I&C cables, power cables & fibre optic cables.                                                                                                                                                              |
| (m)                | Standard SAT for the specified systems                                                                                                                                                                                                                         |
| (n)                | 'As Built' drawings                                                                                                                                                                                                                                            |
| (o)                | Instruction manual for installation and start-up (for each system)                                                                                                                                                                                             |
| (p)                | System operation and maintenance manual                                                                                                                                                                                                                        |

### 8.3.6 TRAINING

1 No. Contractor's engineer shall be made available for 2 weeks for assistance in operation, maintenance, tuning & training of Purchaser's personnel at Site after commissioning of each system. The rates of the engineer shall be indicated

Schedule of personnel for supervision of erection, start-up, commissioning and performance.

Training shall be required on both hardware & application software development.

### **8.3.7 TESTING, INSTALLATION, COMMISSIONING AND ACCEPTANCE**

#### **8.3.7.1. General**

On the basis of guidelines specified in this specification Bidder shall submit their own testing, installation, commissioning and acceptance procedure. The procedure shall include purpose of test, test definition, results expected and acceptance criteria. For software it shall include details of the method, list of tests, sequence of execution, results expected and acceptance criteria.

#### **8.3.7.2. Site Acceptance Tests (SAT)**

Full integrated site acceptance test shall be performed before hand over of total system to the PURCHASER. The test shall demonstrate functionality of the entire system supplied & erected by the Contractor. The Contractor shall provide all personnel, test facilities, equipment and tools etc. for the same. All test instruments shall have calibration certificates from approved test house, valid for minimum 6 months. A test procedure is required for approval 2 weeks prior to the schedule start.

#### **8.3.7.3. Testing Requirements**

Tests on cables

- Check details are in accordance with the specification.
- Check for physical damage.
- Megger test between each core and armour/sheath (For electrical cables)
- Continuity check including screen continuity (For electrical cables)
- Terminations of the cables at both ends.

8.3.7.4. It shall be ensured that erection of all panels is as per approved layout drawings. Checking for tagging/identifications of all the panels shall be done. Checks for continuity and termination of all power, signal, control and fibre optic cables shall be carried out as per approved drawings. All the panels supplied & erected by the Contractor shall be checked at site by carrying out the following tests:

- Visual & Mechanical testing.
- Power up tests
- Checks on incoming voltage and power distribution
- Checking of incoming power supply to the panels supplied & erected by the Contractor.
- Switching on the incoming supply to panels by switching on MCCBs/MCBs one after the other.
- Power 'ON' PCs for CCTV System.

- Demonstration of all system functions of CCTV System.
  - Checking of all HMI screens, alarms etc.
  - Integrated testing of the IBMS and CCTV System.
  - Checking of proper functioning of all Printers with printouts of alarm lists, reports, important alarms etc.
- 8.3.7.5. The Contractor shall co-ordinate with other Contractors for the other systems and integration with IBMS system.
- 8.3.7.6. Tests on electrical installation
- Checking of closing, tripping, supervision and interlocking of control devices.
  - Checking operation of all alarm circuits.
- 8.3.7.7. Test on complete control system.
- On completion, the functioning of all systems shall be tested to demonstrate its correct operation in accordance with the Specification.
  - For testing, the Contractor may provide temporary means to simulate operating conditions, but the system will not be finally accepted until correct operation has been demonstrated to the satisfaction of the Purchaser.
- 8.3.7.8. Commissioning
- a. Commissioning Procedure shall be carried out in a methodical sequence as follows
    - Start-up,
    - Initial running,
    - Operability adjustment,
    - Stable operation
    - Final adjustment
  - b. The Contractor shall check the operating conditions by constantly monitoring operating data.
  - c. The Contractor shall specify for each discrete part of the system for which the operational data has to be recorded and the manner in which the data is to be taken. All the operating data shall be recorded, evaluated and submitted to the Purchaser.

### **8.3.8 SPECIFIC REQUIREMENTS / INSTRUCTION TO BIDDERS**

- 8.3.8.1. This is a Unit rate contract. The price/ contract value shall be arrived at based on quantities indicated in Bill of Quantity and unit rates for supply & erection quoted by the Bidder. The break-up of unit prices for various items in Bill of Quantity shall be used for future addition/deletion of the items, if any.
- 8.3.8.2. Contractor shall estimate Cable quantities based on enclosed GA drawings & layouts for bidding purpose only. However the Contractor is advised to visit Site &

take actual measurements for arriving at the cable quantities actually required at Site before placement of Order.

- 8.3.8.3. The construction of this facility requires that, all CONTRACTOR'S adhere to good daily housekeeping practices. During construction the CONTRACTOR shall every day, keep all work and storage areas used by them free from accumulation of waste materials. Scrap / rubbish shall be removed from the site to the satisfaction of the PURCHASER. The CONTRACTOR shall maintain a crew to carry out this function without any additional payment.
- 8.3.8.4. The equipment to be supplied and erected under this specification shall be in accordance with specification & data sheets.
- 8.3.8.5. Any item which may not have been specifically mentioned herein but are needed to complete the equipment / system shall also be treated as included and the same shall also be supplied and erected at no extra cost, unless otherwise specifically excluded as indicated.
- 8.3.8.6. The BIDDER shall comply with all systems / parameters wherever they are specified in data sheets. No credit will be given during tender evaluation, if parameters better than those specified are offered by the BIDDER.
- 8.3.8.7. Deviation from the specifications, if acceptable to the PURCHASER in so far as practicable shall be converted to rupee value and added to the bid price to compensate for the deviation from the specification. In determining the rupee value of the deviations, the PURCHASER shall use the parameters consistent with that specific in the documents and specifications and other information as necessary and available to the PURCHASER.
- 8.3.8.8. Bidder's Offer
  - a) To enable thorough and fast scrutiny of the BIDDER's offer, BIDDERS are advised to respond all their technical data in the enquiry by clearly marking out their response, wherever they want to provide additional data and / or they deviate from the specified requirements. In case of full compliance, the enquiry specification and data sheets shall remain unaltered. Each data sheet & write up in specification shall be signed and stamped by the BIDDER. This requirement is very important. Non compliance of this by the BIDDER may result in their bid being rejected.
  - b) BIDDER is advised to quote for the complete scope and partial response shall not be entertained. In case of few items which do not directly fall under BIDDER's manufacturing range and / or not available from indigenous source, BIDDER should take the responsibility upon themselves to arrange to procure them and supply to ensure that their offer is complete in all respects.

### **8.3.9 SPARES AND MAINTENANCE TOOLS AND TACKLES**

#### **8.3.9.1. GENERAL**

- a) All spares and maintenance tools and tackles shall be designed to enable maintenance to be carried out in the least time and at the least cost and support resources without affecting the performance and safety aspects.

- b) All the spares and maintenance tools and tackles supplied shall be new and unused.
- c) The VENDOR/CONTRACTOR shall guarantee that before going out of production of spares and maintenance tools and tackles for the equipment furnished, he shall give at least 12 months advance notice to the PURCHASER, so that the latter may order his requirement in one lot, if so desired.

#### 8.3.9.2. SPARES

The BIDDER shall include the following three (3) categories of spares in his scope of supply.

##### a) START-UP AND COMMISSIONING SPARES

Spares required for start-up and commissioning of the equipment, plant or system shall be indicated by the BIDDER in 'Schedule of Start-up and Commissioning Spares'. Unit price and total price to be indicated in this schedule are for information only. Total value of such spares shall be included in the quoted price for supply or erection of the equipment, plant or system. For equipment, plant and system for which erection and commissioning is in the CONTRACTOR's scope, quantity of spares actually used during the start-up and commissioning or its total value may be more than that indicated in the BID. No additional amount is payable to the CONTRACTOR on this account.

##### b) ESSENTIAL SPARES

Essential spares are those, which are considered necessary by the PURCHASER for three (3) years of trouble-free operation of the equipment, plant or system. These shall be as listed in data sheets A. The BIDDER shall include these in 'Schedule of Essential and Recommended Spares'. Total value of such spares shall not be included in the quoted price for supply or erection of the equipment, plant or system. This value shall be considered for the purpose of the BID evaluation.

##### c) RECOMMENDED SPARES

Recommended spares are those, which are considered necessary by the BIDDER for three (3) years of trouble-free operation of the equipment, plant or system in addition to those, specified as 'Essential Spares' by the PURCHASER. Total value of such spares shall not be included in the quoted price for supply or erection of the equipment, plant or system. This value shall be considered for the purpose of the BID evaluation.

- d) All spares supplied shall be strictly inter-changeable with the parts for which these are intended to be replacements. The spares shall be treated and packed for long term storage under the climatic conditions prevailing at the site e.g., small items shall be packed in sealed transparent plastic bags with desiccator packs as necessary.
- e) Each spare shall be clearly marked or labelled on the outside of its packing with its description and purpose. When more than one spare is packed in a single case, a general description of the contents shall be shown on the outside of such case and a detailed list enclosed. All cases, containers and other

packages shall be suitably marked and numbered for the purposes of identification.

#### 8.3.9.3. MAINTENANCE TOOLS AND TACKLES

- a) The BIDDER shall indicate and include in his scope of supply all the necessary tools, tackles, appliances and lifting devices for the effective maintenance and servicing of the equipment and its components. The BIDDER shall list the maintenance tools and tackles offered by him in 'Schedule of Maintenance Tools and Tackles'. The BIDDER shall also include and supply the minimum maintenance tools and tackles. PURCHASER reserves the right to exclude any of the above items from the VENDOR's/CONTRACTOR's scope of supply and effect price adjustments on the basis of the unit prices quoted. The despatch of tools, tackles, appliances and lifting devices shall be synchronised with the despatch of the related equipment.
- b) Each tool and tackle shall be clearly marked with its size and purpose. Each set of tools and tackles shall be suitably arranged in fitted boxes of mild steel construction, the number of boxes being determined in relation to the layout of the plant in question. The taps, stocks and dies shall be kept in approved mild steel boxes with compartments for individual items. If the weight of any box and its contents is such that it cannot be conveniently carried, it shall be supplied on steerable rubber tyred wheels.
- c) Each tool box shall be provided with a lock and two keys and shall be painted navy blue and clearly marked, in white letters, with the name of the equipment, plant or system.
- d) The tools and tackles with the appropriate boxes, are to be handed over to the
- e) PURCHASER at the time of issue of the taking-over certificate.

## **8.4.ACCESS CONTROL SYSTEMS**

### **8.4.1 Scope of Work**

- 8.4.1.1. The scope of work shall include the design, supply, installation, commissioning, integrating, guaranteeing and maintenance of an integrated access control system. Scope shall also include laying of cabling, necessary for installation of the system as indicated in the specification and Bill of Quantities. Any openings/chasing in the wall/ceiling required for the installation shall be made good in appropriate manner.
- 8.4.1.2. Access control system shall be provided at New Administration Building.
- 8.4.1.3. Attendance monitoring facility shall be provided at Entrance of New Administration Building. The system shall be interfaced with Finance software for recording in/out time of employee and generate salaries accordingly.
- 8.4.1.4. Access control system shall be integrated with Fire alarm system. In case of fire occurrence, all door access shall be disabled for uninterrupted and fast evacuation of occupants.
- 8.4.1.5. This document is specifying the minimum criteria for the Design, Supply, Installation and Commissioning & Maintenance of Access Control System. Bidder shall be responsible for detailed engineering based on products proposed.

### **8.4.2 System Description**

- 8.4.2.1. Access control system (ACS) shall be provided for the New Administration Block and will be a part of the Integrated Building Management System. Integrated Building Management System (IBMS) mainly integrates the data / information from various sub systems and facilitates smooth, effective and efficient administration of day-to-day activities. It also stores the information obtained from various systems and compiles them to generate the reports for management information in a required format. It also facilitates in regulating safety and security of specified area of New Administration Block.
- 8.4.2.2. The ACS shall comprise of
  - a. Smart Cards
  - b. Smart Card readers
  - c. Controllor
  - d. Electro Magnetic locks
  - e. Exit push buttons
  - f. Central server PC and printer.
- 8.4.2.3. The ACS server shall be located in the Server Room at 2<sup>nd</sup> Floor, Administration block. Reports like time-in, time-out, attendance etc. shall be generated and stored



in the system. The ACS shall be provided with complete required software and hardware.

- 8.4.2.4. All doors shall be either wooden / aluminium. In case of glass doors, a U-clap and L-Bracket shall be provided around the door. Maximum thickness in either case will be 2". Doors will open only in one direction and will be equipped with automatic door closer of suitable size (depending on the type of door). Doors will be single leafed. If they are double leafed then one leaf of the door will be permanently bolted and entry for access control purposes will be necessarily through the other leaf.
- 8.4.2.5. Magna locks will be installed on the door frame at the top and will give a feedback on the door position also.
- 8.4.2.6. Exit push button will be installed just beside the door on a wooden boxing.
- 8.4.2.7. Controller for Access Control System shall be mounted on each block of each floor in the Electrical room. The controller shall be a compact panel mounted, stand-alone type of access controller with provision for controlling the doors. The Controller shall allow the opening and closing of the door with the event of authorised read for an adjustable time.

#### **8.4.3 Access Control System Hardware Specification:**

##### **8.4.3.1. Operator Workstation – Man Machine Interface (MMI)**

The function of the MMI is to provide a user friendly operator interface (GUI) and to provide data archiving facilities. For system reliability, the MMI shall not be required to perform any of the data processing for the regular functioning of the Access Control System.

##### **8.4.3.2. Operator Interface**

The entire database of the central access controller shall be definable at the operator workstation.

##### **8.4.3.3. Operator Commands**

The operator interface shall allow the operator to perform commands including, but not limited to the following

- Operator Log and Access Privileges
- Override all doors to Access Mode of Operation
- Release Overrides
- Command Door to Access Mode
- Command Door to Secure Mode
- Command Door to Temporarily open
- Silence Local Alarms
- Manage Personnel Access Levels & Time Zones
- Control Remote Processors

- System operators shall, from the operator interface, be able to manually unlock controlled doors for a variable time period, or program an event to automatically unlock and lock doors during a particular time period.

#### 8.4.3.4. Logs & Summaries

Reports shall be generated and directed to MMI, printers or disk files. At minimum, the system shall allow the user to easily obtain the following:

- List of all cardholders
- List of all transactions currently available (Audit Trail)

#### 8.4.3.5. Access Controllers

- a. The Access Control System Controller shall be configurable, distributed processing access control panel that communicates with a host computer and dedicated peripheral devices to perform access control functionality. It monitors a wide variety of access control input devices such as readers, door contacts, request to exit switches, etc. and controls output devices such as door locks and alarms.
- b. Built-in programming shall allow the system controller to maintain its operation in the event of loss of communications with the host computer. The system shall be modular in structure for ease of installation, maintenance and future expansion.
- c. The System shall be configured by selection of plug-in modules that offer these advantages:
  - Plug-in reader and I/O modules shall be used to configure each panel on an individual basis to satisfy the requirements for that area. Facility expansion shall be possible by adding modules to an existing panel or by adding more panels. Technicians shall troubleshoot and replace plug-in modules without disrupting the entire system. Pluggable terminal blocks shall allow modular removal without disturbing wiring connections
  - All access controller panels shall be housed in a cabinet designed for mounting directly to a wall or vertical surface. Its door shall contain a key lock. To eliminate the possibilities of compromises, due to the accessibility of the electronics, the access controller should contain a tamper switch to protect against unauthorised enclosure access. The field controller shall provide, or be capable of expansion to, the following capacities:
 

|                     |               |
|---------------------|---------------|
| i. Card Readers     | Minimum 8     |
| ii. Card Capacity   | 500 (minimum) |
| iii. Alarm Points   | 8             |
| iv. Access Levels   | 256           |
| v. Time Zones       | 256           |
| vi. Password Levels | 25            |

- |                       |                                                                       |
|-----------------------|-----------------------------------------------------------------------|
| vii. Card Transaction | 4000 with lithium battery (Buffer)<br>for storage and battery back up |
| viii. Real Time Clock | Yes                                                                   |
| ix. Battery Back Up   | Yes                                                                   |
- x. The system shall be capable of storing 4000 transactions per access controller
- d. The access controller shall communicate with the Reader. When a card is read at a reader, the card number and issue level are sent to the controller. The controller shall be programmed to process this data and after comparing it with the card data base resident in the access controller, shall grant access to the card holder. If access is granted, the controller shall send a signal to the appropriate electronic lock to activate the door. If access is denied, the transactions will be recorded in the controller and an alarm is raised identifying time date, Controller name & card name at HMI.
- e. The system shall be flexible to designate certain readers to control entry or exit, and shall require a card holder using a card at any entry reader to subsequently use it at any exit reader before again entering the secured area. This shall prevent “passing back” a card to an un-authorised second user. Individual cards may be programmed for special privileges to override access level and time zone parameters. In event of a power loss, a battery backup shall be provided full controller operation for up to 8 hours. Cards shall be programmed into system / controller individually.
- f. The access controller shall provide a buffer to store 4000 historical transactions if communication is lost with the MMI.

#### 8.4.3.6. Reader Interface Modules (RIM)

- a. The Smart type Card Readers shall be attached to the RIM. The RIM shall control the electric lock, visual access indicators, access and shunt timers. The RIM shall monitor door status via a door contact sensor and lock status via a lock contact. An alarm shall be reported when the door is not closed or when the door is forced open. An alarm shall be reported when the lock is not closed properly. Readers shall be flush mounted.
- b. In case RIM is not provided a multipair cable shall be laid from the Door lock, Card reader's up to the Controller in the Control room.

#### 8.4.3.7. Smart Cards & Card readers

- a. The cards for this access control system shall be of top quality, highly durable and resilient material designed for use with Smart card readers. Each card shall be encoded with a digit unique to the access system, and individual card number. Supply of suitable programming device and printing units for the cards shall be included in the scope of bidder, so that no external agencies shall be involved after getting the basic equipment for ACS except the dummy cards. The manufacturer shall have the capability to provide custom printed dummy cards, in accordance to the manufacturer's guidelines, to meet the needs specified by the system owner.

- b. Cards shall be size of a credit card and have the feature to laminate a photo or other identifying information on it. The cards should be ISO thickness capable of being printed directly. The access cards must have the ability to print the card holder's video image directly on the cards surface. The card is simply presented within 100 mm of the reader. The reader as a minimum must have LED indication upon presentation of the Access card.

#### 8.4.3.8. Basic Access Control Software Features:

The basic access control software features shall be as follows:

- a. User database
- b. Database system settings & partitioning
- c. Control access to areas via text
- d. Timed control access
- e. Backup and archive
- f. Password protection and operator level privileges
- g. Data import / export
- h. Anti Pass back – Soft or Hard
- i. Personnel movement tracking
- j. Display of alarm & sensor status
- k. Context sensitive help screens
- l. Audit Trail archiving & retrieval
- m. Custom reports such as attendance statement with first in and last out timings, weekly/quarterly/monthly/summaries based on employees' code/plant/area/gate/ time or any other parameter that is tagged in to the database.
- n. Networkable either via a LAN, WAN or leased line

#### 8.4.3.9. Electro Magnetic Lock

600lbs / magnetic lock, Single / Double EM locks should be designed to meet fire/life safety applications by providing an auxiliary locking mechanism that has no moving parts to bind or wear out for trouble free operation. This should ensure inhibited release at all times where they have become extremely prevalent in applications other than fire/life safety. Suitable for access controlled & secure areas within buildings with Single / double leaf doors. The Magnetic Lock should consist of Magnet mounted frame onto door frame and a steel plate attached to the top of the door. This will be strongly bonded when magnet get energized and holding the steel plate. Instant release should be possible when power supply is cut-off, in an emergency situation.

- Holding Force – 600 lbs / magnet
- Operating Voltage – 12V / 24V Selectable
- Current Draw – 300-500 mA
- Operating Temperature - -10 to 55 Deg C

#### 8.4.3.10. Exit Push Button

Exit Push Button with Includes break glass switch assembly use to egress swinging or sliding doors that are electrically or electronically locked. In perimeter protection systems that involve the central control of electric locking devices, an on-site emergency release may be required. The “break glass” concept may be preferred over the pull station, because it is less vulnerable to misuse or tamper actuation. It shall be Surface mount in a standard 3-gang enclosure. It shall be Compatible with all Fail Safe type electronic locking systems. It shall be Models with LED or audible alarm. Also clearly marked signage indicating purpose of the release.

### 8.4.4 Power Supply

8.4.4.1. Feeders (1 no.) of 230 V AC, UPS power shall be made available in the UPS Room for the Access Control System. UPS will be located in the Electrical room as shown in the Location layout drawing. Contractor shall lay cables from UPS to each of the system panels.

### 8.4.5 Power Cables

8.4.5.1. The specifications for power cables shall be as below:

- Conductor Material : Stranded Copper
- Insulation Material : Cables shall be PVC insulated as per application.
- Voltage Grade : 1100 V
- Armouring : All power cables will be GI wire armoured.
- Sheathing Material : Inner & Outer sheaths shall be FRLS PVC

### 8.4.6 I&C Cables

8.4.6.1. All multipair & multicore cables shall be provided with 20% (of used pairs/cores) spare pairs & cores for future use. Cables for Ethernet connectivity shall be CAT 6 cables which shall be armoured. Cables for RS-485 connection shall be twisted pair cables, shielded & armoured.

#### 8.4.6.2. Cable Glands

All cable glands shall be of double compression type with high quality neoprene gaskets. Cable glands shall be of brass with nickel plating.

#### 8.4.6.3. Cable trays

Cable trays shall be perforated of hot dipped galvanized steel. Cable trays shall have 50 mm collar height. The cable trays shall be covered type.

The cables coming in the beam area shall be allowed to pass through conduits.

The cables laid between two different buildings shall be laid in conduits in cable trenches.

I&C Cables and power cables shall be routed through different cable trays to avoid Electromagnetic Interference.

Minimum 300 mm distance shall be maintained between I&C cables / 24 V DC power supply cables and 415 V AC/ 230 V AC power cables.

All cable trays shall be provided with 20% spare space for future use.

#### 8.4.6.4. Fire proof Sealing for Cable penetration

Cables/ cable tray openings in walls and floors or through pipe sleeves from one area to another or one elevation to another shall be sealed by a fireproof sealing compound. The fire-proof sealing compound shall effectively prevent the spread of fire from the flaming to non-flaming side, in the event of fire.

#### 8.4.6.5. The specifications of cables shall be as mentioned below.

|                                   |     | Description                       | Power Cable                                                         | Control cable                                                                      | Signal cable                                                                                |          | Triad Cable           |          |          |      |
|-----------------------------------|-----|-----------------------------------|---------------------------------------------------------------------|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|----------|-----------------------|----------|----------|------|
| GENERAL                           | 1.  | Type                              | Armoured                                                            | Screened, armoured                                                                 | Twisted, screened, armoured                                                                 |          |                       |          |          |      |
|                                   | 2.  | Voltage grade                     | 1100 V                                                              | 1100 V                                                                             | 660 V                                                                                       |          |                       |          |          |      |
| CONDUCTOR                         | 3.  | Material                          | Annealed Tinned Copper                                              |                                                                                    |                                                                                             |          |                       |          |          |      |
|                                   | 4.  | Shape of conductor                | Stranded circular                                                   |                                                                                    |                                                                                             |          |                       |          |          |      |
|                                   | 5.  | Size                              |                                                                     |                                                                                    |                                                                                             |          |                       |          |          |      |
|                                   | 6.  | No. of strands                    | 7 nos.                                                              |                                                                                    |                                                                                             |          |                       |          |          |      |
| PRIMARY INSULATION                | 7.  | Material                          | Extruded Polyethylene (PE) as per BS-EN 50290-2                     |                                                                                    |                                                                                             |          |                       |          |          |      |
|                                   | 8.  | Thickness of insulation (Nominal) | 0.8 mm                                                              |                                                                                    |                                                                                             |          |                       |          |          |      |
|                                   | 9.  | Colour code                       |                                                                     | Grey                                                                               | White +ve, Black –ve (For each pair)                                                        |          | Brown, Black and blue |          |          |      |
| INDIVIDUAL PAIRS / TRIADS         | 10. | Twist                             | NA                                                                  | NA                                                                                 | Min. 10 nos. twist / meter for each pair                                                    |          |                       |          |          |      |
|                                   | 11. | Identification                    | NA                                                                  | NA                                                                                 | Numbers at not more than 250mm length                                                       |          |                       |          |          |      |
| INDIVIDUAL PAIR / TRIAD SCREENING | 12. | Material                          | NA                                                                  | NA                                                                                 | AL Mylar tape applied helically with metallic side down in contact with drain wire          |          |                       |          |          |      |
|                                   | 13. | Tape thickness                    | NA                                                                  | NA                                                                                 | Minimum 0.075 mm thick for single pair cables<br>Minimum 0.05 mm thick for multipair cables |          |                       |          |          |      |
|                                   | 14. | Overlap                           | NA                                                                  |                                                                                    | NA                                                                                          | Min. 25% | 100%                  | Min. 25% | 100%     |      |
|                                   | 15. | Polyester tape                    | NA                                                                  | NA                                                                                 | Polyester tape of 0.05 mm thick each. two tapes with min. 25% overlap & 100% coverage       |          |                       |          |          |      |
|                                   | 16. | Drain wire                        |                                                                     |                                                                                    |                                                                                             |          |                       |          |          |      |
|                                   | 17. | Material                          | NA                                                                  | NA                                                                                 | Annealed Tinned Copper                                                                      |          |                       |          |          |      |
|                                   | 18. | Size                              | NA                                                                  | NA                                                                                 | 0.5mm <sup>2</sup> , with 7 strands, each of 0.3 mm dia.                                    |          |                       |          |          |      |
| OVERALL SCREENING                 | 19. | Material                          | NA                                                                  | AL Mylar tape applied helically with metallic side down in contact with drain wire |                                                                                             |          |                       |          |          |      |
|                                   | 20. | Tape thickness                    | NA                                                                  | Minimum 0.075 mm                                                                   |                                                                                             |          |                       |          |          |      |
|                                   | 21. | Overlap                           | Coverage                                                            | NA                                                                                 | Min. 25%                                                                                    | 100%     | Min. 25%              | 100%     | Min. 25% | 100% |
|                                   | 22. | Drain wire                        | NA                                                                  |                                                                                    |                                                                                             |          |                       |          |          |      |
|                                   | 23. | Material                          | NA                                                                  |                                                                                    | Annealed Tinned Copper                                                                      |          |                       |          |          |      |
|                                   | 24. | Size                              | NA                                                                  |                                                                                    | 1 mm <sup>2</sup> , with 7 strands, each of 0.3 mm dia.                                     |          |                       |          |          |      |
| BINDER TAPE                       | 25. | Type                              | Non-Hygroscopic, two tapes with min. overlap of 25% & 100% coverage |                                                                                    |                                                                                             |          |                       |          |          |      |
|                                   | 26. | Tape Thickness                    | Each tape of min. 0.023 mm thick                                    |                                                                                    |                                                                                             |          |                       |          |          |      |

|                       |     |                                     |                                                                                                                                                                              |                                                         |       |
|-----------------------|-----|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|-------|
| INNER SHEATH          | 27. | Material                            | Extruded flame retardant PVC type ST-2, 90°C as per IS-5831 , oxygen index over 30% and temp. index over 250 deg C.                                                          |                                                         |       |
|                       | 28. | Thickness (Nominal)                 | As per BS-EN 50288 part 7 (Note-2)                                                                                                                                           |                                                         |       |
|                       | 29. | Colour                              | Black                                                                                                                                                                        |                                                         |       |
|                       | 30. | Diameter over inner sheath          | Bidder to Specify<br>Note:- Cable dimensions (OD under armour, OD over armour, overall OD) shall be as per BS-EN-50288-7. Maximum tolerance in dimensions shall be +/- 2 mm. |                                                         |       |
|                       | 31. | Rip Chord                           | Non-metallic required under inner sheath                                                                                                                                     |                                                         |       |
| ARMOURING             | 32. | Material                            | Galvanised steel                                                                                                                                                             |                                                         |       |
|                       | 33. | Size                                | As per BS-EN 50288                                                                                                                                                           |                                                         |       |
|                       | 34. | Diameter over armour                | Bidder to Specify<br>Note:- Cable dimensions (OD under armour, OD over armour, overall OD) shall be as per BS-EN-50288-7. Maximum tolerance in dimensions shall be +/- 2 mm. |                                                         |       |
| OUTER SHEATH          | 35. | Material                            | Extruded flame retardant PVC IEC-332, Type ST-2, 90°C as per IS-5831                                                                                                         |                                                         |       |
|                       | 36. | Thickness (Nominal)                 | As per BS-EN 50288 part 7 (Note-2)                                                                                                                                           |                                                         |       |
|                       | 37. | Colour                              | Black                                                                                                                                                                        | Black, for Intrinsic safe light blue                    | Black |
|                       | 38. | Overall Diameter                    | Bidder to Specify<br>Note:- Cable dimensions (OD under armour, OD over armour, overall OD) shall be as per BS-EN-50288-7. Maximum tolerance in dimensions shall be +/- 2 mm. |                                                         |       |
|                       | 39. | Cable identification                | Running length printed at min. every 1 metre interval                                                                                                                        |                                                         |       |
| ELECTRICAL PROPERTIES | 40. | Conductor resistance                | As per BS-EN 50288 part 7                                                                                                                                                    |                                                         |       |
|                       | 41. | Drain wire resistance               | NA                                                                                                                                                                           | ≤ 30 ohms/km @ 20 deg c. Noise rejection ratio ≥ 76 db. |       |
|                       | 42. | Insulation resistance               | 1 G Ω/KM as per BS EN 50288                                                                                                                                                  |                                                         |       |
|                       | 43. | Mutual capacitance                  | NA                                                                                                                                                                           | ≤ 110 nF/KM @ 1 KHz                                     |       |
|                       | 44. | Capacitance between core and screen | NA                                                                                                                                                                           | ≤ 400 nF/KM @ 1 KHz                                     |       |
|                       | 45. | Inductance                          | NA                                                                                                                                                                           | ≤ 1 mH/KM @ 1 kHz                                       |       |
|                       | 46. | L/R Ratio                           | NA                                                                                                                                                                           | As per BS-EN 50288 part 7                               |       |

## 8.4.7 Panels Accessories & Wiring

### 8.4.7.1. Wiring

All inter cubical and internal wiring for all panels shall be carried out with 1100V grade, stranded tinned copper conductors with PVC insulation. The minimum size of the stranded copper conductor used for the panel wiring shall be 0.5 mm<sup>2</sup> for analog signals and 1.0 mm<sup>2</sup> for commands. For power supply, the conductor size shall be provided as per the load rating (min. 2.5 sq. mm for 230 V AC). Control & Power wiring shall be segregated and routed in PVC troughs. Different colour wires shall be used for different voltages.

Engraved core identification plastic ferrules, marked to correspond with the panel-wiring diagram shall be fitted at both ends of each wire. Cross ferruling shall be done. This shall also be applicable for fibre optic cable & cores.

All spare contacts and spare terminals of the panel mounted equipment and devices shall be wired to the terminal blocks.

#### 8.4.7.2. Relays

All relays used for interposing shall have at least 2 nos. changeover contacts. The relays shall have status indication and shall be provided with free wheeling diodes.

#### 8.4.7.3. Labels

All front mounted equipment, as well as equipment mounted inside the panels/control desks shall be provided with individual labels with equipment designation engraved. These shall be phenolic overlays (1.6 mm thick) with black background and white lettering and shall be fixed to the panel by stainless steel screws (counter sunk). The panels shall also be provided at the top with a label engraved with the designation. Lettering for panel designation shall be 6 mm.

The minimum lettering size for instrument/device labels shall be 3mm. The lettering on the labels shall be subject to PURCHASER'S approval. Labels of internally mounted equipment shall be clearly visible.

#### 8.4.7.4. Earthing

Each panel shall be provided with a safety ground bus & system ground bus made of copper securely fixed along the inside base of the panels. These buses shall be typically of 25 mm wide and 6 mm thick of copper. The safety ground bus shall be properly secured to the plant safety earthing. All metallic cases/frames of relays, instruments, other panel mounted equipment shall be connected to the safety ground bus and shields & drain wires of signal/control cables shall be connected to the system ground bus by independent copper wires of not less than 2.5 sq. mm. The system ground bus shall be electrically isolated from AC mains earthing bus. The system ground bus shall be insulated from the panel body. The insulation colour code for earthing wires shall be green with yellow bands.

### **8.4.8 SUMMARY OF DATA TO BE FURNISHED ALONG WITH BID AND AFTER ACCEPTANCE OF PURCHASE ORDER**

The BIDDER shall ensure the following documentation are prepared and submitted to PURCHASER for his review / record.

#### 8.4.8.1. Technical Bid

The following drawings/ documents shall be submitted:

- a. Data sheet and catalogs of instruments/ equipments
- b. Dimensional Drawings of Panels along with estimated BOQ for each of the systems.
- c. Overall System Configuration Diagram
- d. Engineering activity and manufacturing schedule giving activity wise breakup to meet the delivery schedule.
- e. Testing & Evaluation plan for the systems offered.

#### 8.4.8.2. Final Documents



- a. Operation and maintenance manuals.
- b. Quality assurance documentation specific for the project.
- c. Final as built documentation folder containing all items for future reference.

#### **8.4.9 SCHEDULE FOR SUBMISSION OF DATA AND DRAWINGS BY CONTRACTOR (DATA TO BE FURNISHED AFTER THE AWARD OF CONTRACT)**

The CONTRACTOR shall submit the following drawings / documents after award of contract for review & approval. CONTRACTOR shall adhere to the delivery schedule as submitted along with the BID. CONTRACTOR shall also refer to data sheets for list of deliverables to be submitted for various instruments/ panels.

| <u>Sl. No.</u> | <u>Details</u>                                                                                                                                                                                                                                                 |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| (a)            | Bar chart for the design, manufacturing, erection, commissioning, trial operation and performance testing of the system offered.                                                                                                                               |
| (b)            | Overall System Configuration Diagram indicating all components including networking.                                                                                                                                                                           |
| (c)            | Unpriced purchase order copy for various bought out /sub contracted equipment / services.                                                                                                                                                                      |
| (d)            | Following drawings for panels:                                                                                                                                                                                                                                 |
|                | <ul style="list-style-type: none"> <li>Front facia layout showing all instruments with cut-outs, bezel dimensions, construction details, foundation details and interior G.A. drawings showing interior layout of various modules, instruments etc.</li> </ul> |
|                | <ul style="list-style-type: none"> <li>Internal wiring diagrams indicating termination details of each component.</li> </ul>                                                                                                                                   |
|                | <ul style="list-style-type: none"> <li>Bill of Material (B.O.M.) indicating tag no., quantity, service &amp; model no. of the various modules/instruments/items.</li> </ul>                                                                                    |
|                | <ul style="list-style-type: none"> <li>Make, Model No., Catalogues, data sheets for each item/ sub-item of Access Control System.</li> </ul>                                                                                                                   |
|                | <ul style="list-style-type: none"> <li>ACS Configuration and Layout drawings.</li> </ul>                                                                                                                                                                       |
|                | <ul style="list-style-type: none"> <li>Data Sheets &amp; catalogues for I&amp;C cables &amp; power cables.</li> </ul>                                                                                                                                          |
|                | <ul style="list-style-type: none"> <li>Data sheets &amp; catalogues for Fibre Optic cables, RS-485 to Fibre Optic Converters, F/O convertors &amp; all connectors.</li> </ul>                                                                                  |
|                | <ul style="list-style-type: none"> <li>Earthing diagrams</li> </ul>                                                                                                                                                                                            |
|                | <ul style="list-style-type: none"> <li>Cable Schedules and Interconnection cable schedules.</li> </ul>                                                                                                                                                         |

| <u>Sl. No.</u> | <u>Details</u>                                                                                    |
|----------------|---------------------------------------------------------------------------------------------------|
| (e)            | Load calculations for each system                                                                 |
| (f)            | QAPs for all instruments & panels for each system, I&C cables, power cables & fibre optic cables. |
| (g)            | Standard FAT & SAT for the specified systems                                                      |
| (h)            | ‘As Built’ drawings                                                                               |
| (i)            | Instruction manual for installation and start-up (for each system)                                |
| (j)            | System operation and maintenance manual as described in specification.                            |

#### **8.4.10 TRAINING**

8.4.10.1.1 No. Contractor’s engineer shall be made available for 2 weeks for assistance in operation, maintenance, tuning & training of Purchaser’s personnel at Site after commissioning of each system.

8.4.10.2. Training shall be required on both hardware & application software development.

#### **8.4.11 TESTING, INSTALLATION, COMMISSIONING AND ACCEPTANCE**

##### **8.4.11.1. General**

On the basis of guidelines specified in this specification Bidder shall submit their own testing, installation, commissioning and acceptance procedure. The procedure shall include purpose of test, test definition, results expected and acceptance criteria. For software it shall include details of the method, list of tests, sequence of execution, results expected and acceptance criteria.

##### **8.4.11.2. Factory Acceptance Tests (FAT)**

- a. Contractor shall demonstrate functional integrity of the various items in the systems supplied by him, including the system hardware and software covered in this specification. No material or equipment shall be transported until all required tests are completed & Purchaser gives the despatch clearance.
- b. Purchaser reserves the right to involve and satisfy himself at each and every stage of testing. They shall be free to request specific tests on equipment considered necessary by them, although not listed in this specification. The cost of performing all tests shall be borne by the Contractor.
- c. Bidder to note that acceptance of any equipment or the exemption of inspection testing shall in no way absolve the bidder of the responsibility for delivering the equipment meeting all the specified requirements.

- d. It shall be Contractor's responsibility to modify and/or replace any item (hardware or software) if the specified functions are not completely achieved satisfactorily during FAT.
- e. Contractor shall not replace any component/module/subsystem unless it has failed and a log of such failures & analysis of the failure generated in form of a report shall be maintained during FAT. If a malfunction of module/component in a subsystem repeats, the test shall be terminated and contractor shall replace the faulty component/module. Thereafter test shall start all over again. If a subsystem fails during FAT and is not repaired and made successfully operational within 4 hours of active repair time after the failure, the test shall be suspended and restarted all over again only after contractor has replaced the device into acceptable operational condition.
- f. The FAT for the various items shall be performed in accordance with the approved QAPs.
- g. Testing & FAT shall be carried out in two phases. The minimum requirement for testing during these two phases shall be as follows:  
 Under the first phase bidder shall perform tests at his works to ensure that all components function in accordance with the specifications. A test report shall be submitted for the Purchaser's review within one week of completion of this test. Bidder shall perform the following minimum tests for the various systems and reports shall be forwarded to the Purchaser:
  - i. Quality control test which shall be carried out to assure quality of all components and modules
  - ii. Visual check of panels, all instruments, all modules, fibre optic converters etc.
  - iii. High voltage test as per relevant IS standard
  - iv. Megger test
  - v. System power-up test, which shall test functionally all hardware, racks, cabinets etc.
  - vi. Functional testing. This shall include the simulation of each item in the various systems supplied & wired by the Contractor and achieving the functional requirements as called for in the specifications and to verify proper system response. This is applicable for the Fire Alarm System. All testing for fire alarm system shall be in accordance with NFPA 72.
  - vii. Functional testing of networking.

8.4.11.3. After the Contractor has performed the tests satisfactorily, the Contractor shall perform tests on all the items to be witnessed by Purchaser as per approved QAPs. Contractor shall notify the Purchaser at least three (3) weeks prior to factory acceptance test. This shall be the second phase of testing which shall be carried out systematically, fully and functionally test all hardware and software in the presence of Purchaser's representative.

All test instruments shall have calibration certificates from approved test house, valid for minimum 6 months.

#### 8.4.11.4. Site Acceptance Tests (SAT)

Full integrated site acceptance test shall be performed before hand over of total system to the PURCHASER. The test shall demonstrate functionality of the entire system supplied & erected by the Contractor. The Contractor shall provide all personnel, test facilities, equipment and tools etc. for the same. All test instruments shall have calibration certificates from approved test house, valid for minimum 6 months. A test procedure is required for approval 2 weeks prior to the schedule start.

#### 8.4.11.5. Testing Requirements

- a. Tests on cables
  - Check details are in accordance with the specification.
  - Check for physical damage.
  - Megger test between each core and armour/sheath (For electrical cables)
  - Continuity check including screen continuity (For electrical cables)
  - Terminations of the cables at both ends.
- b. It shall be ensured that erection of all panels is as per approved layout drawings. Checking for tagging/identifications of all the panels shall be done. Checks for continuity and termination of all power, signal, control and fibre optic cables shall be carried out as per approved drawings. All the panels supplied & erected by the Contractor shall be checked at site by carrying out the following tests:
  - Visual & Mechanical testing.
  - Power up tests
  - Checks on incoming voltage and power distribution
  - Checking of incoming power supply to the panels supplied & erected by the Contractor.
  - Switching on the incoming supply to panels by switching on MCCBs/MCBs one after the other.
  - Power 'ON' PCs for Access Control System.
  - Demonstration of all system functions Access Control System.
  - Checking of all HMI screens, alarms etc.
  - Integrated testing of the IBMS and Access Control System.
  - Checking of proper functioning of all Printers with printouts of alarm lists, reports, important alarms etc.
- c. The Contractor shall co-ordinate with other Contractors for the other systems and integration with IBMS system.
- d. Tests on electrical installation
  - Checking of closing, tripping, supervision and interlocking of control devices.
  - Checking operation of all alarm circuits.
- e. Test on complete control system
  - On completion, the functioning of all systems shall be tested to demonstrate its correct operation in accordance with the Specification.

- For testing, the Contractor may provide temporary means to simulate operating conditions, but the system will not be finally accepted until correct operation has been demonstrated to the satisfaction of the Purchaser.

#### **8.4.12 Commissioning**

8.4.12.1. Commissioning Procedure shall be carried out in a methodical sequence as follows

- Start-up,
- Initial running,
- Operability adjustment,
- Stable operation
- Final adjustment

8.4.12.2. The Contractor shall check the operating conditions by constantly monitoring operating data.

8.4.12.3. The Contractor shall specify for each discrete part of the system for which the operational data has to be recorded and the manner in which the data is to be taken. All the operating data shall be recorded, evaluated and submitted to the Purchaser

#### **8.4.13 EQUIPMENT & SERVICES TO BE PROVIDED BY THE CONTRACTOR**

8.4.13.1. This specification covers specific requirements of design, preparation of detailed drawings, manufacture, testing at manufacturer's works, inspection at Vendor's/Sub-Vendor's works, packing, forwarding, transportation, transit insurance, delivery at site, installation, testing at site, erection and commissioning of Access control System (ACS) as per specification and data sheets enclosed.

8.4.13.2. The following shall be in the scope of the CONTRACTOR

ACS comprising of Access cards (smart type), card readers, magna locks, exit push buttons, Access Management controller, PC with 15" Flat TFT LCD monitor, software, all associated cabling and installation hardware for the system.

8.4.13.3. Cabling

- a) Contractor shall supply & lay the following cables along with all the installation hardware and accessories:
  - UPS to ACS panel
  - ACS system cabling
- b) Cable Trays & Conduits shall be routed above the false ceiling.

8.4.13.4. Earthing

- a) Earthing for the entire system to be provided by the Contractor. Separate electrical & instrumentation earth pits shall be provided by Others. This earth pit shall be interconnected with electrical earth pit. Contractor shall connect the safety ground bus & system ground bus for the systems supplied by him to the respective earth pits.

- b) Single point earthing configuration shall be followed for the cable shields i.e. all signal and control cables shields shall be grounded at one end only to avoid ground loop.

#### 8.4.13.5. Interfacing with third party devices

The Access control system shall be interfaced with the Integrated Building Management system (IBMS) at the Server Room, 2<sup>nd</sup> Floor, Admin Block.

### **8.4.14 EQUIPMENT & SERVICES TO BE PROVIDED BY OTHERS**

The following are the equipment and services that shall be provided to the CONTRACTOR:

- a) 230V AC, Feeder (UPS supply for ACS panel). Contractor shall lay the Power cables from the panel to the system.
- b) Uninterruptible Power supply.
- c) Data Servers.
- d) Electrical & Instrument earth Pits.

### **8.4.15 SPECIFIC REQUIREMENTS / INSTRUCTION TO BIDDERS**

- 8.4.15.1. This is a Unit Rate contract. The price/ contract value shall be arrived at based on quantities indicated in Bill of Quantity and unit rates for supply & erection quoted by the Bidder. The break-up of unit prices for various items in Bill of Quantity shall be used for future addition/deletion of the items, if any.
- 8.4.15.2. Contractor shall estimate Cable quantities based on enclosed GA drawings & layouts for bidding purpose only. However the Contractor is advised to visit Site & take actual measurements for arriving at the cable quantities actually required at Site before placement of Order.
- 8.4.15.3. The construction of this facility requires that, all CONTRACTOR'S adhere to good daily housekeeping practices. During construction the CONTRACTOR shall every day, keep all work and storage areas used by them free from accumulation of waste materials. Scrap / rubbish shall be removed from the site to the satisfaction of the PURCHASER. The CONTRACTOR shall maintain a crew to carry out this function without any additional payment.
- 8.4.15.4. The equipment to be supplied and erected shall be in accordance with specification.
- 8.4.15.5. Any item which may not have been specifically mentioned herein but are needed to complete the equipment / system shall also be treated as included and the same shall also be supplied and erected at no extra cost, unless otherwise specifically excluded as indicated.
- 8.4.15.6. The BIDDER shall comply with all systems / parameters wherever they are specified in data sheets and specification. No credit will be given during tender evaluation, if parameters better than those specified are offered by the BIDDER.
- 8.4.15.7. Deviation from the specifications, if acceptable to the PURCHASER insofar as practicable, will be converted to rupee value and added to the bid price to

compensate for the deviation from the specification. In determining the rupee value of the deviations, the PURCHASER will use the parameters consistent with that specific in the documents and specifications and other information as necessary and available to the PURCHASER.

#### 8.4.15.8. Bidder's Offer

- a) To enable thorough and fast scrutiny of the BIDDER's offer, BIDDERS are advised to respond all their technical data in the enquiry by clearly marking out their response, wherever they want to provide additional data and / or they deviate from the specified requirements. In case of full compliance, the enquiry specification and data sheets will remain unaltered. Each data sheet & writeup shall be signed and stamped by the BIDDER. This requirement is very important. Non compliance of this by the BIDDER may result in their bid being rejected.
- b) BIDDER is advised to quote for the complete scope and partial response will not be entertained. In case of few items which do not directly fall under BIDDER's manufacturing range and / or not available from indigenous source, BIDDER should take the responsibility upon themselves to arrange to procure them and supply to ensure that their offer is complete in all respects.

### **8.4.17 SPARES AND MAINTENANCE TOOLS AND TACKLES**

#### 8.4.16.1. GENERAL

- a) All spares and maintenance tools and tackles shall be designed to enable maintenance to be carried out in the least time and at the least cost and support resources without affecting the performance and safety aspects.
- b) All the spares and maintenance tools and tackles supplied shall be new and unused.
- c) The VENDOR/CONTRACTOR shall guarantee that before going out of production of spares and maintenance tools and tackles for the equipment furnished, he shall give at least 12 months advance notice to the PURCHASER, so that the latter may order his requirement in one lot, if so desired.

#### 8.4.16.2. SPARES

The BIDDER shall include the following three (3) categories of spares in his scope of supply.

##### a) START-UP AND COMMISSIONING SPARES

Spares required for start-up and commissioning of the equipment, plant or system shall be indicated by the BIDDER in 'Schedule of Start-up and Commissioning Spares'. Unit price and total price to be indicated in this schedule are for information only. Total value of such spares shall be included in the quoted price for supply or erection of the equipment, plant or system. For equipment, plant and system for which erection and commissioning is in the CONTRACTOR's scope, quantity of spares actually used during the start-up and commissioning or its total value may be more than that indicated in the BID. No additional amount is payable to the CONTRACTOR on this account.

b) ESSENTIAL SPARES

Essential spares are those, which are considered necessary by the PURCHASER for three (3) years of trouble-free operation of the equipment, plant or system. These shall be as listed in data sheets A. The BIDDER shall include these in 'Schedule of Essential and Recommended Spares'. Total value of such spares shall not be included in the quoted price for supply or erection of the equipment, plant or system. This value shall be considered for the purpose of the BID evaluation.

c) RECOMMENDED SPARES

Recommended spares are those, which are considered necessary by the BIDDER for three (3) years of trouble-free operation of the equipment, plant or system in addition to those, specified as 'Essential Spares' by the PURCHASER. Total value of such spares shall not be included in the quoted price for supply or erection of the equipment, plant or system. This value shall be considered for the purpose of the BID evaluation.

- d) All spares supplied shall be strictly inter-changeable with the parts for which these are intended to be replacements. The spares shall be treated and packed for long term storage under the climatic conditions prevailing at the site e.g., small items shall be packed in sealed transparent plastic bags with desiccator packs as necessary.
- e) Each spare shall be clearly marked or labelled on the outside of its packing with its description and purpose. When more than one spare is packed in a single case, a general description of the contents shall be shown on the outside of such case and a detailed list enclosed. All cases, containers and other packages shall be suitably marked and numbered for the purposes of identification.

#### 8.4.16.3. MAINTENANCE TOOLS AND TACKLES

- a) The BIDDER shall indicate and include in his scope of supply all the necessary tools, tackles, appliances and lifting devices for the effective maintenance and servicing of the equipment and its components. The BIDDER shall list the maintenance tools and tackles offered by him in 'Schedule of Maintenance Tools and Tackles'. The BIDDER shall also include and supply the minimum maintenance tools and tackles. PURCHASER reserves the right to exclude any of the above items from the VENDOR's/CONTRACTOR's scope of supply and effect price adjustments on the basis of the unit prices quoted. The despatch of tools, tackles, appliances and lifting devices shall be synchronised with the despatch of the related equipment.
- b) Each tool and tackle shall be clearly marked with its size and purpose. Each set of tools and tackles shall be suitably arranged in fitted boxes of mild steel construction, the number of boxes being determined in relation to the layout of the plant in question. The taps, stocks and dies shall be kept in approved mild steel boxes with compartments for individual items. If the weight of any box and its contents is such that it cannot be conveniently carried, it shall be supplied on steerable rubber tyred wheels.



- c) Each tool box shall be provided with a lock and two keys and shall be painted navy blue and clearly marked, in white letters, with the name of the equipment, plant or system.
- d) The tools and tackles with the appropriate boxes, are to be handed over to the PURCHASER at the time of issue of the taking-over certificate.

## 8.5. IT & TELEPHONE SYSTEMS

### 8.5.1 Scope of Work

Extension to the existing Technology Centre (TC) is planned at MSME, Mumbai. New TC have G+3 building with having Administration area, Canteen Area, Customer cell, Calibration & testing Labs, Server room, conference rooms and Training & Class rooms Area. These blocks shall have data connectivity for operating computer System, Network Equipment and also provide connectivity to safety and security system such as CCTV Surveillance system, Access control System, Fire Alarm System, Time & Attendance System. Intercom and telephone system is also planned for communication. Technology Centre at Mumbai will also have server room for installation of servers for different Software used in tool room, Operational software and operating System. System Architecture for data network is shown in figure 1.1 and data and intercom telephone points are listed in Table 1.1 below.

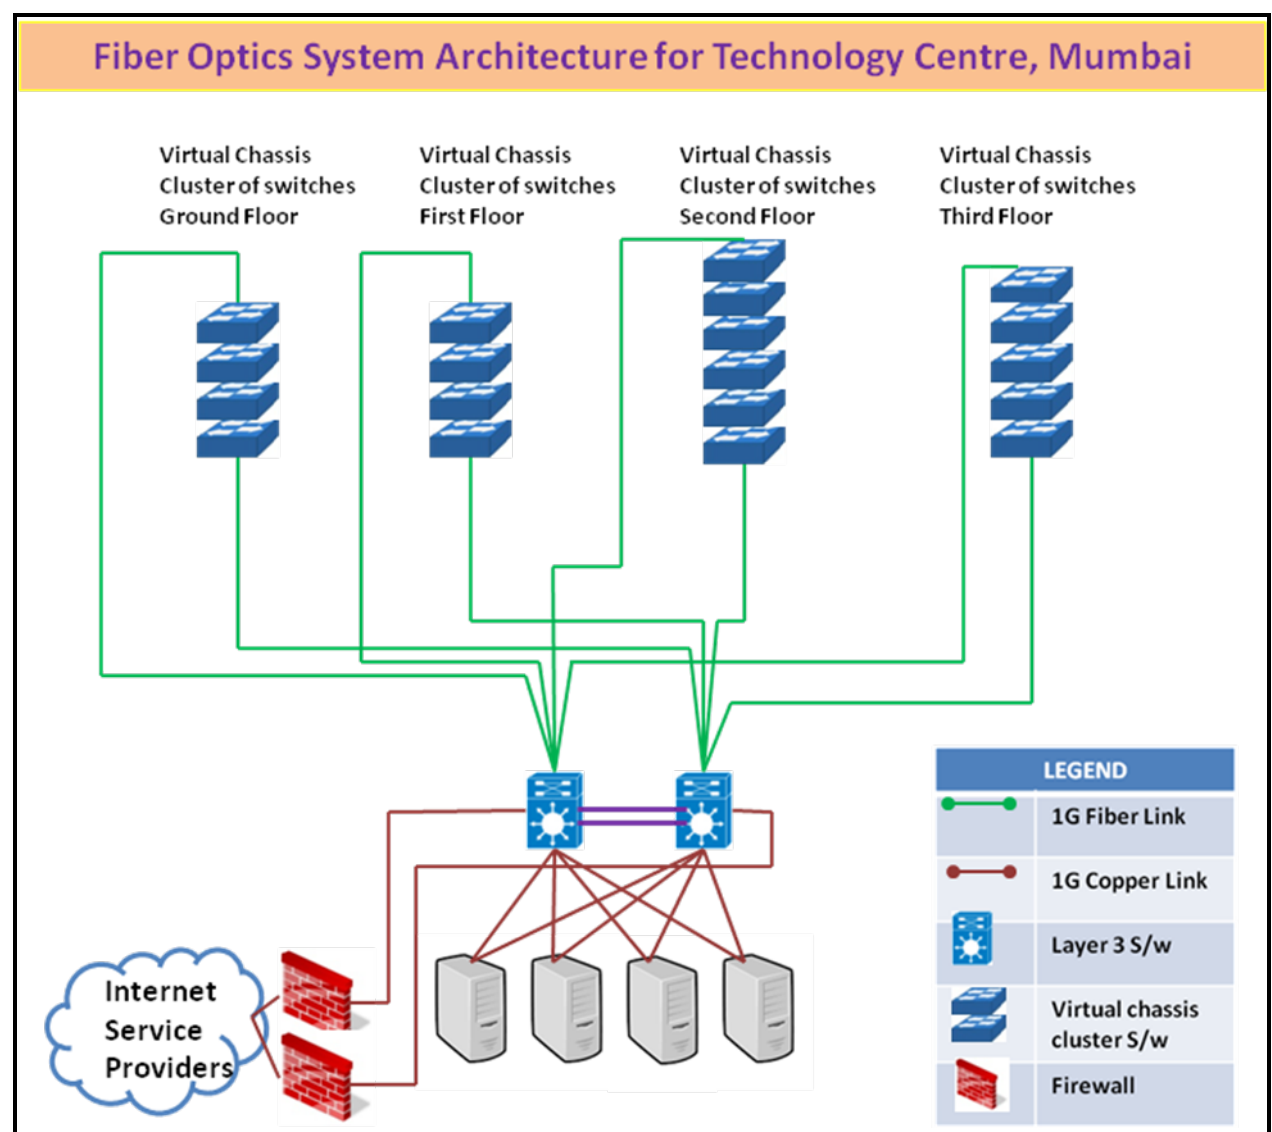


**Figure: 8.1: Architecture Diagram for Data Network**

**Table 8.1: Data and Telecom points**

| MSME Technology Centre Mumbai |                 |     |                      |      |                            |           |
|-------------------------------|-----------------|-----|----------------------|------|----------------------------|-----------|
| Sr. No.                       | Location / Area |     | Connections required |      | Total Connections required |           |
|                               |                 | Qty | DATA                 | Tele | DATA                       | Tele      |
| 1                             | Ground Floor    | 1   | 24                   | 18   | 24                         | 18        |
| 2                             | First Floor     | 1   | 18                   | 14   | 18                         | 14        |
| 3                             | Second Floor    | 1   | 28                   | 11   | 28                         | 11        |
| 4                             | Third Floor     | 1   | 46                   | 9    | 46                         | 9         |
|                               | <b>Total</b>    |     |                      |      | <b>116</b>                 | <b>52</b> |

## 8.5.2 Technical Specifications of the components required

### 8.5.2.1. Layer 3 Core Switch Specifications

- 24 1G SFP slots equipped with 12 1G copper ports for server connectivity, additional 4 10G SFP+ slots, equipped with internal Redundant Power System(RPS)
- Should support active-active clustering Virtual Switching System (VSS) / equivalent technology for higher availability of Layer 2 and Layer 3 (RIP, RIPng, OSPF, OSPFv3, BGP, PIM) including video applications
- The switch should have provision to support VSS/ equivalent clustering bandwidth 80Gbps per switch with two switches in virtual chassis
- Layer 2 Features:** GVRP, VLAN creation based on protocol and Ports, IEEE 802.1Q Virtual LAN (VLAN) bridges, IEEE 802.1v , port IEEE 802.3ac VLAN tagging, Q In Q, Up to 4K configurable VLAN's, IEEE 802.1D MAC bridges, IEEE 802.1s Multiple Spanning Tree Protocol (MSTP), IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)
- Layer 3 Features:** Should support Static routing, RIP, RIPng, OSPF, OSPFv3, PIM v4 SM, DM and SSM, PIMv6-SM, BGP, BGP4, IEEE 802.3az, IEEE 802.3ac
- Should support IEEE 802.17/ERPS/equivalent for sub 50ms ring protection in following scenario : single, dual fibre cuts in ring and when fibre cut at common shared link in between two or more rings
- Security:** Should support ACLs, DHCP snooping, IP source guard and Dynamic ARP Inspection (DAI), MAC address filtering and MAC address lock-down, Tri-authentication: MAC-based, web-based and IEEE 802.1x,
- Management :** CLI, GUI, USB interface for taking backup of software release files configurations, digital optical monitoring, time domain reflectometry (TDR) diagnostic, sFlow or equivalent
- The High available switch shall also act as an Centralized management / provisioning console for dynamic policy roll out across the switches or for selected switches in the network using instant access/equivalent technology

10. The High available switch shall support automated scheduled back up of running configuration files from all the network switches which will be deployed in network to ensure ease of management.
11. The High available switch shall also act as an Centralized management / provisioning console to ensure Zero touch replacement of field switches across network in case of any switch failure and also ensure the last running configuration is pushed through the central chassis upon successful detection of the new replaced field unit without any human intervention
12. The Virtual chassis cluster should also provide the functionality of centralized Software firmware roll and management to all the switches across the network to ensure consistent software image is maintained centrally across the network switches.
13. The Centralized Management / Provisioning console for Zero touch replacement , Dynamic Policy roll out , Dynamic Network provisioning / Centralized Software Firmware roll out shall support these technical functionalities over the LAN and WAN network
14. Switch should be capable of inbuilt wireless controller functionality for the management of min 40 Wi-Fi access points.

For ease of integration, all switches, AP, firewall, SFP's should be of same OEM.  
Approved Makes: Cisco, HP, Juniper, Allied Telesis

#### 8.5.2.2. 48 Port Access Switch

1. 48 100/1000 Base-T Ports Additional 4x1G SFP slots. The 4 1G SFP ports should be scalable to support 10G SFP+ modules
2. Switching Capacity: Non-Blocking Forwarding Rate: Wire Speed
3. Should support active-active clustering VSS / equivalent technology for higher availability of Layer 2 and Layer 3 including video applications
4. The Active - Active Virtual chassis cluster should support technology functionality locally or over geographically diversified locations For Diversified Data centre high availability operations
5. The Active - Active Virtual chassis bandwidth between the 2 high available cluster switches should be of min of 20Gbps when clustered locally or over geographically diversified locations
6. **Layer 3 Features:** Should be upgradable to support Static routing, RIP, RIPng, OSPF, OSPFv3, PIM v4 SM, DM and SSM, PIMv6-SM,
7. **Layer 2 Features:** GVRP, VLAN creation based on protocol and Ports, IEEE 802.1Q Virtual LAN (VLAN) bridges, IEEE 802.1v VLAN classification by protocol and port IEEE 802.3ac VLAN tagging, Q In Q, Up to 4K configurable VLAN 's, IEEE 802.1D MAC bridges, IEEE 802.1s Multiple Spanning Tree Protocol (MSTP), IEEE 802.1w Rapid Spanning Tree Protocol (RSTP), IEEE 802.3az, PVST+ compatibility mode

8. **Resiliency:** Should support IEEE 802.17/equivalent for sub 50ms ring protection in following scenario : single, dual fibre cuts in ring and when fibre cut at common shared link in between two or more rings
9. **Security:** Should support ACLs, DHCP snooping, IP source guard and Dynamic ARP Inspection (DAI), MAC address filtering and MAC address lock-down, Tri-authentication: MAC-based, web-based and IEEE 802.1x, DHCPv4 (server, relay and client)
10. **IPv6 Features:** DHCPv6 relay, DHCPv6 client, DNSv6 relay, DNSv6 client, IPv4 and IPv6 dual stack, IPv6 QoS and hardware ACLs, SNMPv6, Telnetv6, SSHv6 and Syslogv6, NTPv6 client and server, IPv6 static unicast and multicast routing
11. **Multicast Features:** IGMP snooping (v1, v2 and v3), MLD snooping (v1 and v2), PIM-SM and SSM for IPv6, Bootstrap Router (BSR) mechanism for PIM-SM IGMP query solicitation, PIM Dense Mode (DM)
12. **Management Features:** SNMPv1, v2c and v3, IEEE 802.1AB Link Layer Discovery Protocol (LLDP), Web GUI, sFlow, CLI, GUI, SNMPv3, SNMP Console management port, Port mirroring locally with in switch and across Virtual chassis cluster, TFTP, NTP, Syslog , An USB or equivalent memory card socket , allowing software release files, configuration and other files to be stored for backup and distribution to other switches, DDM – Optical digital diagnostic monitoring as per SFF – 8472 or equivalent standards, time domain reflectometry (TDR) diagnostic
13. Should support functionality to continuously monitor the received optical power of fibre ports and send SNMP trap when received optical power crosses predefined threshold level to avoid physical intrusion on fibre links
14. Should seamlessly integrate with core switch
15. Certifications: UL,
16. Approved Makes: Cisco, HP, Juniper, Allied Telesis

#### 8.5.2.3. 24 Port Access Switch

1. 24 100/1000 Base-T Ports Additional 4x1G SFP slots. The 4 1G SFP ports should be scalable to support 10G SFP+ modules
2. Switching Capacity: Non-Blocking Forwarding Rate: Wire Speed
3. Should support active-active clustering VSS / equivalent technology for higher availability of Layer 2 and Layer 3 including video applications
4. The Active - Active Virtual chassis cluster should support technology functionality locally or over geographically diversified locations For Diversified Data centre high availability operations
5. The Active - Active Virtual chassis bandwidth between the 2 high available cluster switches should be of min of 20Gbps when clustered locally or over geographically diversified locations
6. **Layer 3 Features:** Should be upgradable to support Static routing, RIP, RIPng, OSPF, OSPFv3, PIM v4 SM, DM and SSM, PIMv6-SM,

7. **Layer 2 Features:** GVRP, VLAN creation based on protocol and Ports, IEEE 802.1Q Virtual LAN (VLAN) bridges, IEEE 802.1v VLAN classification by protocol and port IEEE 802.3ac VLAN tagging, Q In Q, Up to 4K configurable VLAN 's, IEEE 802.1D MAC bridges, IEEE 802.1s Multiple Spanning Tree Protocol (MSTP), IEEE 802.1w Rapid Spanning Tree Protocol (RSTP), IEEE 802.3az, PVST+ compatibility mode
8. **Resiliency:** Should support IEEE 802.17/equivalent for sub 50ms ring protection in following scenario : single, dual fibre cuts in ring and when fibre cut at common shared link in between two or more rings
9. **Security:** Should support ACLs, DHCP snooping, IP source guard and Dynamic ARP Inspection (DAI), MAC address filtering and MAC address lock-down, Tri-authentication: MAC-based, web-based and IEEE 802.1x, DHCPv4 (server, relay and client)
10. **IPv6 Features:** DHCPv6 relay, DHCPv6 client, DNSv6 relay, DNSv6 client, IPv4 and IPv6 dual stack, IPv6 QoS and hardware ACLs, SNMPv6, Telnetv6, SSHv6 and Syslogv6, NTPv6 client and server, IPv6 static unicast and multicast routing
11. **Multicast Features:** IGMP snooping (v1, v2 and v3), MLD snooping (v1 and v2), PIM-SM and SSM for IPv6, Bootstrap Router (BSR) mechanism for PIM-SM IGMP query solicitation, PIM Dense Mode (DM)
12. **Management Features:** SNMPv1, v2c and v3, IEEE 802.1AB Link Layer Discovery Protocol (LLDP), Web GUI, sFlow, CLI, GUI, SNMPv3, SNMP Console management port, Port mirroring locally with in switch and across Virtual chassis cluster, TFTP, NTP, Syslog , An USB or equivalent memory card socket , allowing software release files, configuration and other files to be stored for backup and distribution to other switches, DDM – Optical digital diagnostic monitoring as per SFF – 8472 or equivalent standards, time domain reflectometry (TDR) diagnostic
13. Should support functionality to continuously monitor the received optical power of fibre ports and send SNMP trap when received optical power crosses predefined threshold level to avoid physical intrusion on fibre links
14. Should seamlessly integrate with core switch
15. Certifications: UL,
16. Approved Makes: Cisco, HP, Juniper, Allied Telesis

#### 8.5.2.4. Firewall Specifications:

1. Internet Gateway router / Next Generation Firewall and Security gateway device with min 2 \* 10/100/1000 T or 2 \* SFP combo WAN ports and Min 8 \* 10/100/1000T LAN ports with 2 \* WAN By Pass ports for high availability
2. **Performance Requirements:**
  - a. Min Firewall throughput of 1500 Mbps or more
  - b. Min Concurrent sessions support up to 1,00000 sessions
  - c. Min IPS throughput of 600 Mbps or more

- d. Min IP Reputation throughput of 800 Mbps or more
- e. Min Malware Throughput of 1180 Mbps or more
- f. Min VPN Throughput of 700 Mbps or more
- 3. **Layer 3 features:**
  - a. Static routing, RIP and RIP ng, OSPFv2 and OSPFv3, BGP4 and BGP4+
  - b. IGMP, PIMv4 and PIMv6 , Bridging (LAN / WAN)
  - c. PPPoE , DHCPv4/v6 client, server, relay, Static, IPsec traversal, Dynamic NAPT, RADIUS / TACACS+
- 4. **Network Resilience:** VRRP and VRRPv3 , Spanning Tree, RSTP, MSTP
- 5. **Firewall Features**
  - a. DPI firewall, Application control , web control, Traffic shaping
  - b. DMZ, Port forwarding, Dynamic NAT
  - c. Static PPP, L2TPv3 Ethernet pseudo-wires, GRE for IPv4 and IPv6
- 6. **Management features**
  - a. USB Slot media, RADIUS, TACACS+, SNMP v1 / v2 and V3 support
  - b. SSHv1/v2, Syslog & Syslogv6, SNMPv2 & v3
  - c. Full environmental monitoring of PSU, fan, temperature and internal voltages.
  - d. Should be able to send SNMP traps alert to network managers in case of any failure
  - e. Safety Standards: UL60950-1, CAN/CSA-C22.2 No. 60950-1-03, EN60950-1, EN60825-1, AS/NZS 60950.1, UL,
- 7. Approved Makes: Cisco, HP, Juniper, Allied Telesis

#### 8.5.2.5. Network Management System Specifications:

- 1. Automatic topology discovery and creation of network maps for Layer 3 and Layer 2 network , All the available VLANS
- 2. Should have high level Network Inventory polling capability for IP Network nodes including the security appliance, All available line cards , Modules , ports , Physical links , VLAN interfaces and all the other SNMP capable devices in the network
- 3. Should have powerful administration control
- 4. Detailed performance monitoring and management
- 5. Should have extensive fault management capabilities with Real time Event and Alarm notifications , System Logs and Audit trials
- 6. Creation and management of security and QOS policies
- 7. Scheduled Device configuration back-up and restore functionality
- 8. Automatic Detection of configuration changes for easy trouble shooting and Isolation
- 9. Should support 3rd party devices and end points
- 10. Should have the functionality of Group provisioning / Scheduled configuration roll out management
- 11. Should have the ability to perform scheduled or unscheduled network wide software or Firmware upgrades

12. Should have the ability to customize the NMS dash boards as per the requirements of technical team
13. Should have the ability to perform / create group of devices for applying same task
14. Should have extensive Event notification capability
15. Should provide the flexibility to the network administrator to assign task to an Individual network engineer and assign ownership / track the status of the issue resolution
16. Should have extensive centralized trouble shooting tools in built
17. The NMS solution should be preferably from the same Active switching vendor , in case vendors proposing for 3rd party NMS solution should provide all the interop reports certified by both the NMS vendor and Active switching on seamless interoperability
18. All the required Hardware / Software licenses for the NMS solution should be proposed by the bidder
19. Approved Makes: Cisco, HP, Juniper, Allied Telesis

#### 8.5.2.6. Specifications for 12C Single Mode Fiber Optic Cables:

##### **12C Single mode Optical Fiber cable shall have following features,**

- Gel-free design for water blocking capability using craft-friendly water-swellaable materials
- Flexible, craft-friendly buffer tubes to route in closures easily
- S-Z stranded, loose tube design which isolates fibers from installation and environmental rigors and facilitates mid-span access
- Dielectric central strength member and requires no bonding or grounding
- Medium-density PE jacket to be rugged, durable and easy to strip
- Meets industry standards and specifications including ICEA-640, Telcordia GR-20

##### **Typical Outdoor Fiber Cable Loose Tube**

Following are the typical specifications for OS2 Outdoor Single mode Fibre supporting speeds in excess of 10Gbps:

##### **General Specifications:**

- |                            |                     |
|----------------------------|---------------------|
| - Cable Type               | Stranded loose tube |
| - Construction Type        | armoured            |
| - Subunit Type/Buffer tube | Gel-free            |

##### **Construction Materials:**

- |              |                                   |
|--------------|-----------------------------------|
| - Cable Type | zero water peak single mode fiber |
|--------------|-----------------------------------|



|                        |                            |
|------------------------|----------------------------|
|                        | (G.652.D or G.652.D   OS2) |
| - Jacket Material      | PE                         |
| - Fiber Type, quantity | 12                         |
| - Jacket Color         | Black                      |
| - Jacket UV Resistance | UV stabilized              |

#### **Physical Characteristics:**

|                                         |                |
|-----------------------------------------|----------------|
| - Cladding Diameter                     | 125.0 ± 0.7 μm |
| - Core/Clad Offset                      | ≤ 0.5 μm       |
| - Coating Diameter (Uncolored)          | 245 ± 10 μm    |
| - Coating Diameter (Colored)            | 254 ± 7 μm     |
| - Coating/Cladding Concentricity Error, | 12 μm          |

|                        |       |
|------------------------|-------|
| Max.                   |       |
| - Clad Non-Circularity | ≤ 1 % |

#### **Optical Characteristics, General:**

|                                |                                      |
|--------------------------------|--------------------------------------|
| - Point Defects, Max.          | 0.10 dB                              |
| - Cut-off Wavelength           | ≤ 1260                               |
| - Zero Dispersion Wavelength   | 1,302-1,322 nm                       |
| - Zero Dispersion Slope, Max.  | 0.090 ps/[km-nm-nm]                  |
| - Polarization Mode Dispersion | ≤ 0.06 ps/sqrt (km)Link Design Value |
| - Backscatter Coefficient      | -79.6/-82.1 dB @ 1310/1550 nm        |
| - Index of Refraction          | 1.467/1.468 @ 1310/1550 nm           |

#### **Environmental Characteristics:**

|                                 |                                        |
|---------------------------------|----------------------------------------|
| - Temperature Dependence        | -76°F to 185°F ≤ 0.05 dB (-60 to 85°C) |
| - Temperature Humidity Cycling  | 14°F to 185°F ≤ 0.05 dB up to 95% RH   |
| - Water Immersion, 73.4°F (23C) | ≤ 0.05 dB                              |
| - Heat Aging, 185°F (85C)       | ≤ 0.05 dB                              |

#### **8.5.2.7. Specifications for EPABX System:**

Required EPABX System shall support for minimum 1 PRI, 8 Trunk, 140 Analog Extension, 10 VoIP extensions, 4 Digital Extensions. ISDN-GSM-VoIP PBX with DC Power Supply & CPU Card, Single Cabinet, 10 universal slots, Built-in auto attendant, Ethernet Port, Remote Programming, Inbound & outbound Conference facility, Hot swappable,

1. The equipment shall be electronic type. It shall have microprocessor / micro controller based on Stored Program Control Technique.
2. It shall employ PCM/TDM, 100% non-blocking, digital switching technology.
3. It shall have distributed processing architecture, SLIC and SMT Design.

4. System power supply should be inbuilt and SMPS type.
5. The system should be built on a universal slot architecture and modular in design to enable seamless growth, by adding the desired necessary cards as and when required. Any peripheral card can be inserted in any slot of the platform, whereby it is possible to increase or decrease the trunk lines or subscriber lines of the system as per the requirement in future as per mentioned maximum requirement.
6. It should be suitable for DTMF as well as the FSK type of telephone instruments.
7. The EPABX system supplied shall be with 150 extensions, 1 PRI, 8 C.O. lines and can scale up to 200 extensions, 6 PRI and 100 C.O. lines on the same platform
8. It should have built-in conference facility
9. EPABX shall support E & M Port to connect E & M Lines
10. System Shall support Intercom Line Card
11. The system shall have the inbuilt auto attendant facility and shall be able to answer minimum 5 calls simultaneously.
12. The system shall have an ISDN Digital platform and shall be compatible with ISDN PRI line of Local Service Provider.
13. The system shall have multiple port interfaces such as analog extension lines, digital key phone, IP Extension, C.O. Line, GSM/3G, E & M Line, PRI/E1 and VoIP. All interfaces shall be in the form of expansion cards and can be plugged into the universal slots of the system as and when require in the future.
14. The system should have in-skin GSM card so that the multiple SIMs can be inserted on the GSM card plugged on to the PBX platform. Hence, the calls on GSM mobile can be routed through this SIMs and contribute in reduction of overall telecom bill.
15. All the peripheral cards (extension cards, trunk cards (GSM/VoIP/ISDN etc.) should be hot-swappable.
16. The EPABX should support Radio Connectivity with the in-skin card.
17. The offered exchange should be an ISDN & VoIP ready switch. The system platform should always be ready for ISDN & VoIP and only the necessary in skin ISDN & VoIP cards need to be added for functionality.
18. The system should support SMPP protocol to send/receive SMS using in-skin GSM SIMs within EPABX. Any software required to send/receive SMS shall also to quote separately.
19. The system shall have at least 2 RS232 ports for SMDR/PMS/CAS Interface.
20. The system shall have a built-in remote maintenance facility. The system can be programmed remotely over the internet without any modem required on the PBX side.
21. The call ringing sequence would be programmable and have options such as simultaneous, hunting off, round robin and delayed simultaneous.
22. EPABX should have built-in one number of public address port and external music port.
23. Caller line identification (CLI) on Analog and digital/PRI trunks shall be built-in for both DTMF and FSK telephone instrument.
24. The system shall integrate in-skin voice mail card with 72 hours of storage capacity and dedicated mailbox for each extension.
25. Detail reports of all system parameters should be generated through the SMDR or CDR port of EPABX.
26. The offered system should be QSIG ready (for PRI) for Networking and Feature Transparency between two or more exchanges.

27. Each port of the system shall be programmable. It shall have programmable features port-wise/extension-wise.
28. The system shall support flexible numbering for extensions such as it may have extensions with 1 digit, 2 digits and up to 6 digits numbers as well as in combination of all.
29. The system shall have built-in web based software programming tool for system administration.
30. Access codes, system timers and access to features shall be programmable.
31. Storage of outgoing, incoming and internal call reports shall be generated on SMDR port of the system. It shall also be available online through Ethernet Port.
32. The system should have built-in outgoing Call Log buffer of 2000 calls, incoming call log buffer of 2000 and call log buffer of 1000 internal calls.
33. Features given to an extension shall be accessed from any other extension by dialling the secret codes.
34. System features shall have class of service, night service, conference, auto diagnostic etc. Class of service shall be unrestricted. STD restricted and semi restricted.
35. Extension features shall have an extension to extension call, extension to central office, extension to operator, automatic call back, call transfer, call forward, follow me, executive/secretary, do not disturb, barge-in, raid, Boss ring, Priority, emergency reporting etc.
36. Operator features shall have the assistance to extension, attended call transfer, call intercept, indication of call waiting, night service control etc.
37. The system shall have features as CLI based routing, call duration control, least cost routing i.e. time, number or combination of both.
38. The system shall have a conversational recording in the mail box should be available with voice mail system card of EPABX. Conversation recording should be possible on Analog/Digital/IP as well as Mobile SIP Smartphone (Android/iPhone).
39. The system shall provide IP functionality to support IP extensions and trunks over SIP protocol. It should be possible to support IP Trunks and Extension with the single VoIP expansion card further expansion of VoIP channels shall be possible with an expansion card.
40. Varied type of open SIP IP Terminals such as IP Phone, SIP soft phone and Mobile SIP Client shall be supported.
41. The manufacturer should also have an application for Android and iPhone so that the enterprise mobility can be extended for the Smartphone users.
42. The system shall also be required to supply IP Phones of the same manufacturer.
43. IP functionality of the system shall be in the form of in-skin interface card and can be inserted in the any slots on the platform.
- 44. The system must support following features of IP telephony:** Dynamic DNS, Registrar Server, Proxy Server, Presence Server, NAT and STUN.
45. Approved makes: Progility, Panasonic, Matrix or equivalent.
- 46. The system must have following features:**
  - Modular architecture, Gateway Functionality, Built-in Auto-Attendant
  - Easy integration with other SIP devices such as VoIP gateways, SIP servers and SIP phones
  - Built-in auxiliary ports (Analog Input-Output ports)
  - Hybrid expansion card to meet any requirement

- Networking of multiple sites and offices
- Mobile Close User Groups (CUG)
- On-site and Off-site Mobility
- Multiple Call Groups
- Open standard SIP support
- Least Cost Routing Algorithm
- Centralized Maintenance and Administration
- Unified Messaging – Voice mail to Email
- Call back on trunk, Return call to original caller (RCOC), DID
- Automatic DISA with Built-in DISA card
- Multi-party conference
- Conference Dial-in
- Built-in CLI (DTMF and FSK) on ISDN and analog trunk lines
- CLI based routing
- Conversation recording
- Allowed and Denied call lists
- Call logs to identify missed Calls
- Emergency numbers
- Voicemail system
- Handover and Handoff support with Android/iOS Soft phone Application
- Return call to original caller (RCOC)
- Failover resiliency
- Multiple systems networking through ISDN QSIG and SIP
- SNMP v1/v2c/v3
- Mobile Extension through GSM/3G Mobiles
- Third-party PMS/CAS support
- CTI (TAPI 2.1)
- Routing of calls to only permissible legal networks (Logical Partitioning)
- SMDR through Ethernet Port

#### **8.6. APPROVED MAKES**

**NOTE:** LIST OF APPROVED MAKES FOR PRODUCTS AND MATERIALS FOR LV (LOW VOLTAGE) SYSTEM ARE INDICATED IN THE TABLE BELOW. HOWEVER, ANY OTHER MAKE WHICH IS EQUIVALENT AND MEETING THE TENDER SPECIFICATIONS ARE ALSO ACCEPTABLE WITH PRIOR APPROVAL OF THE ENGINEER.

| <b>Item</b>                         | <b>Makes</b>                      |
|-------------------------------------|-----------------------------------|
| Control Panel Enclosure             | Rittal / APW President / Pyrotech |
| PC for IBMS Server/Operator Station | Compaq / HP                       |

| <b>Item</b>                     | <b>Makes</b>                                                          |
|---------------------------------|-----------------------------------------------------------------------|
| Printer                         | HP-Laserjet                                                           |
| Cable Glands                    | Comet/ Baliga                                                         |
| BMS                             | Honeywell / Siemens / Johnson Controls                                |
| Push Buttons                    | L&T / Siemens / Tecknic / Kaycee                                      |
| I&C cables & Power cables       | Delton/ Associated Flexibles & Cables/<br>Finolex/ Universal/ Uniflex |
| Cable trays                     | Indiana/ West Coast Engg. Pvt. Ltd.,                                  |
| Cable Glands                    | Comet/ Baliga                                                         |
| Relays                          | OEN/ Siemens / Omron                                                  |
| Fire Detection and Alarm System | Cooper / Edwards EST3 / Ravel / GST                                   |
| Fibre Optic Cables              | Finolex/ Uniflex                                                      |
| CCTV System                     | HIKVISION / CP PLUS / Dahua                                           |
| Access control system           | Bosch/ GODREJ and Boyce/Honeywell                                     |
| Layer 3 & Layer 2 Switches      | Cisco, Juniper, HP, Allied Telesis                                    |
| Network Rack                    | WQ, Rittal, Valrack                                                   |
| EPABX                           | Progility, Panasonic, Matrix                                          |
| CAT6 Cable                      | Molex, Dlink, Belden                                                  |
| Connectors & Accessories        | Molex, Legrand, DigiLink                                              |

## **EOT CRANE WORKS**

### **9.1. EOT CRANES**

Electrical overhead travelling cranes of 20 Tonne & 7.5 Tonne safe working load is included in the Contract. The Contractor shall provide all the necessary weights for the Tests on completion. The crane shall conform to IS 3177 or BS 466, Class 2, medium duty, and shall meet the operational requirements shown in the schedule of particulars. The crane shall be designed of welded box girder construction. The bridge shall be designed to carry safely the loads specified in IS 807 or BS 2573. Steel used in the manufacture of the crane shall be tested quality steel conforming to IS 2062 Gr.B for ASTM A36 except that, plates that have to be welded such as for plate girders etc. and those more than 20 mm thick shall conform to IS 2062 or BS 4360.

The crane shall be operated from the floor level of pump set by a single mobile multiway pendant, suspended independently of the electrical cable from the crane girder incorporating not more than 110 V single phase controls. The pendant station shall be earthed separately independent of the suspension. The main power supply will be 415 V, AC. All crane movements shall be clearly indicated on the pendant. The pendant shall be so designed that the operator has full control of the crane during operation. All motors shall be designed for S2, intermittent duty.

Broad parameters of the two EOT cranes are as under:-

|                    | <b>Crane 1</b> | <b>Crane 2</b> |
|--------------------|----------------|----------------|
| <b>Capacity</b>    | 20 Ton         | 7.5 Ton        |
| <b>Span</b>        | 18 mtrs        | 18 mtrs        |
| <b>Lift</b>        | 6.5 mtrs       | 4.5 mtrs       |
| <b>Long travel</b> | 66 mtrs        | 66 mtrs        |

**TECHNICAL SPECIFICATION**  
**EXTERNAL SERVICES**

## EXTERNAL SERVICES WORKS

### 10.1. APPROVED MAKE LIST- EXTERNAL SERVICES

**NOTE:** LIST OF APPROVED MAKES FOR PRODUCTS AND MATERIALS FOR EXTERNAL SERVICES ARE INDICATED IN THE TABLE BELOW. HOWEVER, ANY OTHER MAKE WHICH IS EQUIVALENT AND MEETING THE TENDER SPECIFICATIONS ARE ALSO ACCEPTABLE WITH PRIOR APPROVAL OF THE ENGINEER.

| Make List- External Services |                                       |                                                                                                     |
|------------------------------|---------------------------------------|-----------------------------------------------------------------------------------------------------|
| 1                            | HDPE Pipes                            | Eonn plast India Pvt.Ltd, Sangir Platic Pvt.Ltd, Dinesh Irrigation Pvt. Ltd.                        |
| 2                            | DI Pipes                              | Jindal Saw Ltd, Jai Balaji Industries Ltd., Kejriwal Casting Ltd.                                   |
| 3                            | Cast iron Sluice valves               | S S Industries, Kirloskar Bros. Ltd., Indian Valve Co. (IVC), Fouress Engineers Pvt. Ltd., VAG, SIR |
| 4                            | Cast iron double air valves           | S S Industries, (Sondhi Industries)SIRvalves.in, Kartar Valves                                      |
| 5                            | RCC pipes NP3 & NP4                   | Balaji Spun Pipes, Jain Spun Pipe co.                                                               |
| 6                            | Water meter                           | SBEM Pvt. Ltd                                                                                       |
| 7                            | S.F.R.C. cover and frame (heavy duty) | Nu-Tech concrete product, Agrawal Udyog                                                             |
| 8                            | Foot Rest (PVC Incapsulated)          | Om Plastic                                                                                          |



**TECHNICAL SPECIFICATION**  
**LANDSCAPE WORKS**

## **LANDSCAPE WORKS**

### **11.1. SCOPE OF WORK**

- 1.1 The Scope consists of clearance of the Site of Works and preparation of the same to commence the proposed landscape execution activities. Wherever applicable, this is deemed to include all preliminary works like Dismantling/Demolition, Site Clearance, and General Leveling etc.
- 1.2 The drawings shall be read in conjunction with the specifications and matters referred to, shown or described in one are not necessarily repeated in the other.
- 1.3 In the event of any element of specification not available in any of the documents the instructions of the Engineer-in-Charge in writing shall be followed by the Contractor.
- 1.4 The work shall be carried out in accordance with the drawings and designs as would be issued to the Contractor by the Landscape consultant duly signed and stamped by him. The Contractor shall not take cognizance of any drawings, designs, specifications, etc. not bearing Landscape consultants signature and stamp.
- 1.5 The work shall be executed and measured as per metric dimensions given in the Schedule of Quantities, drawings etc.

### **11.2. GENERAL ITEMS**

The more important Codes, Standards and publications applicable to this section are listed hereinafter.

#### **11.2.1 Setting out the works**

- The Contractor shall supply without additional charges the requisite number of persons with the means and material necessary for the purpose of setting out works and checking, weighing and assisting in the measurement or examination at any time and from time to time, of the work or the materials. Failing this, the same may be provided by the client's designated representative In-charge at the expense of the Contractor and the expenses shall be deducted from any money due to the Contractor under the contract or from his security deposit.
- The Contractor shall arrange for a qualified surveyor to set out the works and obtain certification of its accuracy from the surveyor. The Contractor shall then set out the works and shall be responsible for the true and perfect setting out of the same and for the correctness of the positions, levels, dimensions, and alignment of all parts thereof and for provision of all necessary instruments, appliances and labour in connection therewith. The Contractor shall submit to the client and the Landscape Architects, margins and the verifications of layout within seven days from the date of getting site layout from Landscape Architects / client.

- Mark the layout on the site. All bench marks, levels should be properly established and preserved for future use.
- Clearly check the surveyed map provided by the client and mark all drainage lines, water pipe lines, electrical lines, etc. client has been asked to remove the electrical lines and electrical poles. It needs to be checked by Contractor to satisfy him / herself from safety point of view before starting of work.
- The checking of any setting out or of any line or level by the Landscape Architects and CLIENT's representative or their representative shall not in any way relieve the Contractor of his responsibilities, for the correctness thereof. The Contractor shall carefully protect and preserve all benchmarks and other things used in setting out of the work.

#### 11.2.2 Site Clearing / Excavation / Site Grading

- Light irrigation, by flooding the whole site with water. The water should penetrate up to depth of 15-20 cm only so that the weeds can germinate. Remove all grasses, small shrubs/weeds etc. with roots. Excavating the site as marked on the drawing/as instructed at the site, up to any lead and lift.
- Verify the levels and bench-marks from the up-dated surveyed drawing made available by the client. If there are any discrepancies between the site and the survey drawing, the same are to be brought to the client's notice by addressing a letter to the client and copy marked to the Landscape Architects.
- Grading and levelling of site as shown in drawing / specified on site by Landscape Architects. This will include spreading manually or by help of soil unloaded at different working areas in the site so as to obtain basic datum levels and grades.
- Excavated material shall be stacked off in the manner indicated at the site including stacking of excavated material up to any lead and lift. The rate shall only cover the cost of excavation, stacking and/or spreading of the material, if required at the site.
- Clearing the area of unwanted materials including the weeds, stones, masonry pieces etc. and all such matter that may cause damage to growth of the plant materials immediately or in future.

#### **11.3. EARTH WORKS**

- Earthworks shall involve the grading of soil for earth mounding, the excavation of trenches and soil for formation levels of pathways and foundations, and the fine grading of earth banks and landscape areas roughly graded by others.
- Excavation shall be carried out to the depth shown on or implied in the drawings or to such greater or lesser depths as the Landscape Architect may direct. The Contractor shall supply and fit all shoring, sheeting, strutting and walling required to maintain the sides of excavations as long as necessary and to remove them as required. The Contractor is to allow for making all necessary adjustments to existing manholes in accordance to bring them to the same level as the required profiled grades. No claim

shall be entertained for either bulking or compacting and all other quantities shall be measured net from the drawings.

- The stripping and replacement of the subsoil shall only be done in dry weather and ground conditions unless in exceptional circumstances the Landscape Architect authorizes otherwise. Subsoil in heaps or dumps shall not be sited so as to damage or impede water courses or other drainage so long as they are capable of remaining in operation. Any weeds which may grow on the heaps of subsoil shall be sprayed with an approved selective weed-killer to prevent seeding.
- Notwithstanding the general description for the type of material to be excavated, if original bed rock is encountered during these operations which can only be removed by blasting or compressed air tools this work will be paid for separately as an extra over item for that given for normal excavation. This work shall only be undertaken when authorized in writing by the Landscape Architect.
- During excavation it is expected that the Contractor will take every prudent step or precautions such as tests or borings in order to prove the nature or type of material underneath or the ground bearing capacity in order to protect his workmen, plant or machinery employed in these operations.
- In the event of the Contractor excavating below the proper levels or otherwise in excess of the dimension given, he shall at his own expenses, remove all loose excavated material and replace the soil excavated in error.
- If, in the opinion of the Landscape Architect the bottoms of any excavation or any material to be excavated become unsuitable due to the Contractor's operations, the Contractor shall, at his own expenses, carry out any necessary excavation and make up in a similar manner to the above.
- If, in the opinion of the Landscape Architect the weather conditions are such as to preclude the satisfactory completion of any operation or cause unnecessary nuisance or disturbance to other parties, the Contractor shall, on receiving directions from the Landscape Architect suspend operations on that particular portion of the work until the Landscape Architect considers that weather conditions are satisfactory, or issues a direction to re-commence operations. The absence of such a direction shall in no way constitute the basis of a claim for delay or remedial work to a formation which is unsuitable.

#### 11.3.1 Major Grading

- Site shall be complete with rough dressing including the base levels by civil contractor before handed over to landscape contractor for execution.
- Role of Landscape contractor involves major grading forming earth mounds / hillocks from imported fill materials where specified, or from the site debris and soil generated by excavations. The soil shall be graded using suitable earth moving machinery to the contoured earth forms indicated on the drawings. Soil, when in a dry enough state for easy working, shall be distributed to the correct areas and laid in layers not exceeding

100mm thick and compacted by at least 2 passes of the earth moving machine in each direction for each 100mm layer.

- Earth slopes are to be formed from the compacted mounds to the gradients and levels shown on the drawings, accounting for the topsoil depths to be included after subsoil formation is complete. If insufficient fill is available to complete the levels shown, additional suitable subsoil is to be imported to make up the required quantities. Importation of additional fill shall only be carried out with written permission of the Landscape Architect.
- Earthworks levels are to be carried out to the contours shown on the drawings to a maximum tolerance of 150mm measured vertically, and to a maximum gradient of 1:2. All subsoil levels are to account for the later additional of specified depths of topsoil.
- The Contractor shall be responsible for protection of completed subsoil mounds and shall take preventative measures to control erosion and siltation restore or replace any portion of the earthwork areas which erodes, slumps, silts or is otherwise damaged by the out-washing of soil.

#### 11.3.2 Excavation for Formation Levels and Trenches

- For footpath areas or other paving areas, excavate subsoil to create a smooth formation for taking the sub-base for the paved area, to levels shown on the drawings accounting for the depth of the paving build up.
- Firmly compact sub-grade with a smooth wheeled vibratory roller to achieve an even level. Finished sub-grade is to be protected until the path sub-base or other construction such as pool sub-base is laid. If sub-grade is too dry to be compacted, water shall be added until suitable texture is achieved. If sub-grade is too wet, the material shall be left to dry out until workable.
- A completed sub-grade/formation on which there is standing water, soft spots or slurry shall be deemed to be unsuitable and shall be rectified at the Contractor's expense including making up of additional material as required to bring the formation to line and level again.
- Where soft or wet ground is encountered prior to preparation of the sub-grade and this soft or wet ground cannot satisfactorily be compacted, the Contractor shall submit a written request for this to be inspected and the area to be dug out and replaced with suitable material shall be evaluated by the Landscape Architect and directed accordingly.
- Surplus material resulting from excavations for path formation or drainage trenches shall be taken off site at Contractor's own expense unless otherwise directed by the Landscape Architect in writing.
- Excavation of drainage or formation trenches shall be carried out after the major grading has been completed and approved. Trenches shall be cut to lines and gradients shown on the drawings. Planking and strutting shall be carried out as required to make the sides of the trenches safe. The Contractor will be responsible for ensuring that drainage trenches are kept free from mud and water and side slippage.

### 11.3.3 Fine Grading and Shaping

- Slight unevenness, ups and downs and shallow depressions shall be removed by fine dressing the surface to the formation levels of the adjoining land, as directed by Landscape consultant and adding suitable quantities of Good earth, brought from approved source, if necessary.
- Fine grading shall be carried out using small sized earth moving equipment or by hand, and shall involve final modeling of the earth contours produced by the major grading exercise. The shaping will follow the contours shown on the plans in general terms, but the final forms will be developed by eye to create smoothly flowing and pleasing contours.
- The Fine Grading will provide the detailed earth contouring prior to cultivation of soil. Soil cultivation and the application of topsoil mixes shall not take place until the Fine Grading is completed.

## 11.4. **SOILS: MATERIALS AND PREPARATION**

### 11.4.1 Soils: Subsoil

- Subsoil shall be a free draining soil, generally from horizon over 300mm below the original surface to be used as fill materials, either excavated from areas of the site, or imported.
- The Contractor shall:
  - I. Furnish the source of top soil to Client.
  - II. Study the soil report provided with the tender document, providing soil details such as pH, alkalinity, total soluble salts, porosity, sodium content and organic matter.
  - III. Use the restored soil at site for landscape purpose, manure mixture, Neemcake, weedicide shall be added if required.
  - IV. Not consider any external soil source unless the existing soil conserved from site is lacking in quality and/or quantity.

### 11.4.2 Topsoil Mixes

- The components of the Topsoil Mixes shall be as follows:
- Topsoil shall be a free draining organic soil from horizons less than 300mm from the original surface, of a workable crumbly and lump free loamy character and shall contain no grass or weed growth of any kind or other foreign material or stones exceeding 25mm in diameter. Total stone content shall be no greater than 15% by volume. A 1 litre sample with back up soil test data is required before installation, or mixing.
- TOPSOIL SPECIFICATION: The following criteria shall be tested at an approved laboratory before use on site.

- pH: 5.5 - 7.8
  - Electrical conductivity: 1:2.5 (w/v)
  - Soil-water extracts not exceeding 1500 micromho/cm (1500 micro-Siemens/cm)
  - Soil texture:
    - Sand (0.05 - 2.00mm): Max. 75% Min. 20%
    - Silt (0.002 - 0.05mm): Max. 60% Min. 5%
    - Clay (less than 0.002mm): Max. 30% Min. 5%
- Soil Conditioner shall be dried treated sludge, organic compost or other fibrous approved organic matter suitable for mixing with topsoil to make a friable growing medium for plants, resistant to rapid decay, free of soluble salts below 900ppm, pH 6-7, free of large lumps or debris.
  - Organic Compost shall be organic vegetable compost produced by a thorough horticultural or industrial composting process or Farm Yard Manure (Cow Dung Manure). Compost is to have a clean, un-decomposed smell free from any rotting substances, debris, refuse, clay or visible fungus. A sample is to be submitted for approval before usage. All composts are to be sterilised before being packed for transport and odorous materials used on site will be rejected. Any vermin resulting from use of organic composts will have to be controlled by the Contractor within 12 hours of any infestation.
  - Sand shall be a clean, coarse grained and angular material sourced from a river bed with a minimum 1mm diameter section. It shall be well graded, free from soluble salts ranging in size so that 80-100% passes the 3mm sieve and 0-50% passes the 2mm sieve, with 0% passing through a 1mm sieve.
  - Lightweight Aggregate shall be an approved low density inert material such as expanded shale or clay or volcanic scoria or other porous aggregate capable of being compacted within the soil zone to 90% compaction without being crushed, free from dust and debris, pH 6-6.5, free of soluble salts. A 2 litres sample shall be submitted and tested as part of the soil mix for physical and chemical performance. Materials are to be approved in writing before installation.

#### 11.4.3 Soil Mixes

- The following soil mixes are to be used for different areas and for different types of planting. Minor changes to the proportions shown for particular species may be required, as specified by the Landscape Architect from time to time.
- i. Soil Mix A: for use in natural ground level areas shall comprise the components listed below, which shall be mechanically cultivated to the correct proportions, prior to placement on site or backfilling. Soil Mix A shall comprise the following proportions by volume:

Topsoil: 50%

Sand: 20%

Soil Conditioner: 15%

Organic Compost: 15%

- ii. Soil Mix B: for use in podium area shall be prepared under controlled mixing conditions such as a concrete floor to ensure even mixing. Soil Mix B shall comprise the following proportions by volume:

Topsoil: 30-50%

Sand: 10-30%

Conditioner: 0-20% (as required)

Lightweight Aggregate: 0-20% (as required)

Organic Compost: 20%

- iii. Soil Mix C: for use in planter boxes. Soil Mix C shall comprise the following proportions by volume:

Topsoil: 40%

Sand: 30%

Charcoal: 20%

Organic Compost: 20%

#### 11.4.4 Soil Preparation and Application of Soil Mixes

- All subsoil areas to be topsoiled shall be cleaned free of rubbish, weeds, all stones exceeding 50mm in diameter and builders debris shall be removed from site. Any areas which are contaminated by petrol, soil or other toxic substances shall be excavated to 300mm below the contamination and have the excavated material removed from site. The excavated areas shall be back filled with imported topsoil as specified. These operations shall take place immediately before topsoiling (with soil mixes) commences.
- Where directed by the Landscape Architect, the ground shall be decompacted by ripping to a depth of 300mm. All obstructions to cultivation or deleterious material brought to the surface shall be removed from the site and any voids left by this operation shall be backfilled with imported subsoil as specified.
- Subsoil shall be formed to the finished levels and contours after settlement and with overall even compaction.
- No topsoil or soil mixes shall be spread or cultivation carried out until the subsoil operations have been approved by the Landscape Architect.



- Topsoil or soil mixes shall be spread on the designated areas to the depth shown on the drawings. The loose depth of the topsoil shall be sufficient to allow the area to conform to the levels shown on drawings after natural settlement has taken place. Soil Mixes shall not be compressed or rolled to achieve levels. Conversely if levels drop below specified levels, additional soil mixes are to be added to achieve levels.
- Soil Mixes are to be carefully spread by machine or hand in a moist condition. Very wet or dry soil mixes must not be used. Heavy compaction of soil mixes is to be prevented and compacted soil will be rejected. Soil Mixes are to be spread to the following minimum depths in open ground areas:
  - i. Lawn / Turf areas: 300mm
  - ii. Shrub areas: 450mm deep
  - iii. Tree pits: 1000 x 1000 x 1000mm

Unless directed otherwise or as shown on the drawings

- The prepared topsoil mix shall be compacted to 80% of maximum density to the depth shown on the drawings in 150mm layers. When planter is filled, water topsoil mix thoroughly to ensure proper and uniform compaction. After 2 weeks, fill with additional topsoil mixture and compact to level and before pavers are laid indicated on drawings.
- When in the opinion of the Landscape Architect site conditions are unsuitable for working, soiling operations shall cease and shall only be resumed when authorized by him.
- Contractor shall be responsible for soil protection and shall take preventative measures to control erosion and siltation of all areas and shall restore or replace any portion of the site which erodes, silts up or is otherwise damaged by out-washing of soil.

#### 11.4.5 Fertilizers

- Chemical fertilizers shall be approved granular slow release compound fertilizers. They shall be stored in waterproof sealed bags under shelter away from water and direct sunlight. Samples of the same to be submitted by contractor before use at site.
- Organic fertilizers shall be organic products such as organic liquid fertilizer, pellets or granules manufactured primarily from organic materials. These products are to be from accredited sources and technical data indicating sources or origin and manufacturing process must be submitted before use. Animal by products must be sterilized before being packed for transport and odorous materials used on site will be rejected. Any vermin resulting from use of organic fertilizers will have to be controlled by the Contractor within 12 hours of any infestation. A sample shall be submitted for review by the Landscape Architect before use on site.

#### 11.4.6 Mulches

- Mulches shall be approved friable composted organic materials. Coco-Peat will not be allowed on its own unless mixed in a proportion of 50-50 with another mulching

material free from soluble salts or toxic materials and resistant to rapid decay. Mulches shall have a pH of between 5.5 - 7.0. Samples to be submitted and approved before use.

- Mulches are to be applied in a minimum 50mm layer over the entire surface of shrub and ground cover areas.
- Mulches is to be re-applied to all planting areas every 3 months after initial installation until the end of the maintenance period or until complete surface cover by vegetation is achieved.
- Initial mulching is to take place within 2 days of installation of planting.

## **11.5. SUBSOIL DRAINAGE**

### **11.5.1 Subsoil, Field Drains and Trench Drains**

- Before beginning installation of drain lines establish invert elevation of city storm drains at points where tree drains will tie in and prepare schematic layout for approval of Landscape Architect before digging trench.
- Surplus material resulting from excavations shall be carted to other fill areas within the site. If no additional fill sites are available the Contractor shall remove all surplus material from site and deposit it in a Local Authority approved tip.
- The Contractor shall survey the gradient levels of all trench bases to ensure that all falls are continuous from the highest point down to the outlet point at the sump. These findings shall be submitted to the Landscape Architect for verification before any further work is undertaken, either pipe laying or backfilling.
- All trenches when completed and approved shall be lined with approved filter membrane laid over the base of the trench and up the sides with sufficient membrane to wrap over the top of the gravel backfilling with a minimum overlap of 300mm.
- The base of each drainage trench shall have a layer not less than 30mm and not more than 50mm depth of fine stone chippings 8-12mm diameter or coarse sand laid to accurate falls for bedding the perforated pipes.
- The drainage pipes to the sizes shown on the drawings shall be prefabricated subsoil drainage system or similar approved type. PVC pipes with drilled holes will not be permitted. Drainage pipes shall be laid to the lines to the falls shown on the drawings and accurately boned in to correct gradients before backfilling.
- All pipe junctions shall be as supplied by the selected manufacturer and shall be fitted to the manufacturer's instructions to provide smooth flow and to fit the correct pipe sizes. Where changes in pipe diameters occur the correct junctions shall be used to match the changed pipe diameters.

- Connect drainage system to percolation pits.
- Where subsoil drainage pipes pass under paths or structure the pipe shall be of non perforated pipe joined at either end to the perforated pipe, and be surrounded by 100mm of concrete haunching.
- Trenches shall be backfilled to within 100mm of the finished level with clean coarse grained sand or crushed stone chippings 8-12mm diameter free of any fine particles. The gravel backfill shall be lightly compacted in 100mm depth layers.
- All drains shall be tested on completion to ensure a satisfactory water flow. Any pipes that do not flow are to be taken up and re-laid at the Contractor's expense.
- After testing has been approved, remaining depth of the trench shall be filled with a layer of coarse grained sand up to the finished soil level (after final settlement). Where the top layer is specified as such, clean graded gravel 20-40mm stone chippings free from fine particles shall be placed up to the finished surface mix, free from clay lumps or any item likely to inhibit drainage.

#### **11.6. SOFTSCAPE WORKS**

The scope of services covers all horticultural operations and services including, labour, equipment, services and transport for all plant materials, Good earth, top soil conservation, manures, pesticides etc. completing the entire work within the scheduled time, maintaining the entire Softscaping work for one year after virtual completion of the work.

The Contractor shall refer to Specifications provided in this document for relating to formation levels, sub-bases, concrete footings, foundations and all associated works. The specifications are to be read along with necessary specifications from other consultants.

Vendors' shop drawings shall be submitted for all such items where the Contractor will procure and install items from/by a reputed vendor. Execution of all such items shall be done after such drawings are approved by the Employer/ Employer's representative.

Contractor shall prepare and issue all required working drawings and get them approved by Employer/ Employer's representative with required number of revisions till the details provided do not satisfy the Employer/ Employer's representative.

The scope includes maintenance of all above for 5 Years from the date of end Defects Liability Period (DLP). DLP shall be of one year after completion of Landscape Execution. The Contractor will maintain the entire landscape development area free of cost for a period of one year after completion of all above works as certified by the Employer/ Employer's Representative's in consultation with the Landscape Architect

#### **11.7. SPECIAL CONDITION**

The Contractor will have to provide the following items at no extra cost to Employer:

- a. The Contractor will supply and install 3.0 metres high barricades for safeguarding landscape development area and works, as indicated in the drawing. He may also install the barricades in the landscape development area according to his own understanding if he feels that any part of the landscape area is bound to be damaged for any reason, after taking prior permission from the Employer/ Employer's Representative.
- b. The Contractor will supply, install and maintain at his own cost, the most modern, automated watering system for the landscape, which will take care of the requirement for particular plants, save water and does not waste water, including any requirements specified by the Landscape Architect appointed by contractor. He will give full details of the layout, size of the pipe, size of the sprinklers, bubblers, etc and their warranty period. All equipment must conform to international standards and / or Indian Standards if available. The design of the irrigation system has to be approved by Employer/ Employer's representative.
- c. All equipment required for development shall be made available by Contractor, and its maintenance shall be his responsibility. This includes Tagara, Phawdas, Hose Pipes, Ground Roller, Manual and/or Electric lawn Mowers, Sprinklers, etc.
- d. Contractor will ensure that all plants remain free of diseases, pests, etc during development and maintenance periods. The contractor shall, without any additional charge renew any dead or defective plant material and shall fully maintain including watering, de-weeding etc. of the whole landscape as mentioned above.
- e. The Contractor shall maintain Nursery at his own cost at designated locations as shown in the drawing or at a suitable location within the plot as directed by Employer/ Employer's Representative. The Nursery will be fenced with gates for protection from cattle. The area of Nursery will be approximately 5000sqm. The item would include construction and maintenance of Green Houses if required.
- f. Contractor shall follow pre construction and during construction soil erosion control measures as per the NBC Part 10, section 1, Chapter 4 – Protection of Landscape during Construction.
- g. The contractor in co-ordination with the Employer as applicable shall ensure conservation and storage of top soil: Topsoil shall be stripped to a depth of 200 mm from areas proposed to be occupied by buildings, roads, paved areas and external services. It shall be stockpiled to a height of 400 mm in designated areas and shall be re-applied to site during plantation of the proposed vegetation. Topsoil shall be separated from sub-soil debris and stones larger than 50 mm diameter. The stored topsoil may be used as finished grade for planting areas. It is the landscape contractor's responsibility to conserve top soil that is not disturbed by the civil contractor.

- h. The Contractor shall:
- I. Furnish the source of top soil to Employer/ Employer's Representative.
  - II. Study the soil report provided with the tender document, providing soil details such as pH, alkalinity, total soluble salts, porosity, sodium content and organic matter.  
Ref. Soil Test Report
  - III. Use the restored soil at site for landscape purpose, manure mixture, Neemcake, weedicide shall be added if required.
  - IV. Not consider any external soil source unless the existing soil conserved from site is lacking in quality and/or quantity.

**Soil Analysis for Top Soil fertility determination**

To determine the fertility of top soil for conservation, soil investigation shall be carried out by an NABL accredited laboratory.

Adequate number of test samples of soil from a depth of 10-200mm below ground level shall be collected from at least 5 representative locations from site, preserved and transported (as per standard procedures specified by the laboratory) carefully to the laboratory for carrying out necessary tests.

All relevant Indian Standards for sampling and conducting laboratory tests shall be followed.

This soil samples shall be analyzed to determine soil type, texture, total organic content, pH, extractable nutrients such as nitrogen, phosphorus, potassium, salinity, cation exchange capacity, % base saturation and extractable heavy metals.

The soil analysis report from the laboratory shall also include a statement on the fertility and suitability of the soil for plant growth based on the analysis, in addition to the test results.

**Top Soil conservation**

Topsoil shall be removed for conservation to a depth of 200 mm (not more than 400 mm) and shall be separated from subsoil debris and stones larger than 50 mm diameter.

It shall be stockpiled to a height of 400 mm in designated areas. The stockpiled topsoil shall be protected from erosion during storage by installing earthen berms/solid walls, temporary seeding (using native grass), covering with mulch or plastic, etc.

The topsoil shall be protected with sand bags/solid walled enclosures (2 feet high) on all sides for containment.

Appropriate drainage channels shall be dug around the storage area to prevent flooding of the top soil storage area.

The top soil shall be reapplied to site during plantation of the proposed vegetation as finished grade for planting areas.

Seeding will take place immediately after respreading topsoil and decompacting, unless timing is inappropriate (for e.g., not in mid-summer).

- i. The contractor to identify erosion prone areas on site and protect them from construction activities throughout the construction period. Prevent / mitigate the disturbances caused to site due to construction activity.

- j. The contractor shall execute a sedimentation and erosion control plan that conforms to the best management practices highlighted in the National Building Codes of India (NBC) Part 10, section 1, Chapter 4 – Protection of Landscape during Construction. This standard describes two types of measures that can be used to control sedimentation and erosion. Stabilization measures include temporary seeding, permanent seeding and mulching. Structural control measures include earth dikes, silt fence, sediment trap, and sediment basin. All of these measures are intended to stabilize the soil to prevent erosion.
- k. The erosion and sedimentation control plan must be approved by Employer/ Employer's Representative and the erosion sedimentation control plan must be maintained throughout the execution period.
- l. The contractor shall execute measures of protection and preservation of existing landscape on site during entire construction time.
- m. Design, execute and maintain a temporary storm water management layout for the duration of construction activity. The storm water management layout should conform to National Building Codes of India (NBC) Part 10, section 1, chapter 4 – Protection of Landscape during Construction.
- n. Contractor should take measures to prevent entry of any soluble/ insoluble construction waste to enter the water table/ water ways/ ravines on site.

## **11.8. GENERAL SPECIFICATIONS**

### **11.8.1 Holding Nursery**

- i. A piece of land has been secured within the site for use as a holding nursery as indicated on the Contract Drawing. (Ref. Dwg. No)
- ii. As a holding nursery the Contractor shall provide all necessary plant and equipment to store his plant material, machinery and equipment for the duration of the contract, including the two-year maintenance period.
- iii. The Contractor shall be required to install and establish all equipment that may be required to run a major landscape contract and ensure plant materials remains in a healthy and fit condition. The list of requirements includes, but is not limited to:
  - Provision of a 3,000 high tensioned chain link fence (with at least 2 no. lockable gates) around the extent of the holding nursery)
  - Grading and laying of crusher together with associated storm water drainage to take vehicular loading
  - Provision of all site utilities including water, telephone, electricity
  - Provision of any shade structures that may be required to maintain the plants in a healthy condition prior to planting out

- Provision of any irrigation systems, pumps, sprinklers that may be required to maintain the plants in a healthy condition prior to planting out
  - Provision of a site office to include at least one conference/meeting room capable of comfortably accommodating 15 persons
- iv. The Contractor may wish to use the holding nursery for the purpose of propagation of plant stock for the contract. This is not a mandatory requirement since it is assumed that plant stock will need to be outsourced in order to meet the programme target dates. The decision to use the holding nursery as a propagation area rests entirely with the Contractor having taken into account the programme constraints, the nature of the site location (relatively remote) and his own commercial considerations.

#### 11.8.2 Provision of Site Utilities

- i. The Contractor is to allow for the provision at his own cost of all site utilities for the duration of the contract including but not limited to water, electricity and telephone.

#### 11.8.3 Landscape Development Technique

- i. The contractor will not be allowed to use different techniques or quality criteria or materials unless his alternative system has been confirmed in writing by the Employer/Employers representative.
- ii. No cost increases for alternative specifications will be entertained unless formally submitted in writing as an improvement in the quality of a product and accepted in writing, following Employer/Employer's Representative approval, by the Employer/Employers representative.

#### 11.8.4 Quality of Workmanship and Materials

- i. All materials and workmanship shall be of the high standards and quality demanded by this specification. Sub-standard work and materials identified by the Employer/Employer's representative will be rejected and will be required to be rebuilt or replaced at the Contractor's costs.
- ii. All plant material shall be of the genus, species and variety specified and substitutions will not be permitted unless authorized in writing by the Employer/Employer's representative. The sizes and plant description set out in the section headed Plant Material.
- iii. All trees and shrubs supplied for the contract shall be free of pest, disease, discolouration and damage. Plants shall be well branched with vigorous shoots. The root system of each plant shall contain a good proportion of fibrous roots.
- iv. All materials are to be approved by the Employer/Employer's representative prior to use on site. Materials shall be obtained from approved sources/manufacturers and/or suppliers. All guarantees and warranties shall be copied and submitted to the Employer/Employer's representative prior to requests for approval.

- v. Where particular products are specified, the Main contractor's specialists subcontractors if he wishes to use similar products from other manufacturers must seek prior confirmation from the Employer/Employer's representative.

#### 11.8.5 Site Responsibilities

i. From the commencement of the works until the Certificate of virtual Completion has been issued by the Employer/Employer's representative, the Main contractors specialists subcontractors shall, in respect of all areas of soft landscape works, adjacent areas and parts of the site used by him, be responsible as follows:

- For adequate protection to grassed areas, planted areas and trees and for making good Softscape works on removal of any protective measures at completion.
- For any damage to existing works and features and any necessary rectification work required to obtain approval from Employer/Employer's Representative.
- For keeping all paved surfaces used by him in a clean and tidy condition.
- For periodic removal of all surplus excavations and waste matter produced by his operations to a Local Authority registered tip off site, to be found by the Main contractors specialists subcontractors.
- For keeping all Softscape areas in a weed-free and tidy condition and adequately watered.

ii. The Main contractor's specialist subcontractors shall make appropriate allowance for these requirements in his rates.

iii. The Main contractor's specialist subcontractors shall, within 24 hours of notification and as directed by the Employer/Employer's representative, undertake at his own expense any remedial works arising from the stated requirements.

iv. Tree conservation:

- All trees to be conserved shall be protected with a 3-4 foot high enclosure constructed using brick/fencing (with an access gate for tree maintenance) at a distance indicated in the table below depending on the diameter of the tree trunk.

| TRUNK DIAMETER<br>(measured at 4.5 feet above natural grade) | DISTANCE FROM TRUNK ON<br>ALL SIDES |
|--------------------------------------------------------------|-------------------------------------|
| Up to 6 inches                                               | Past dripline                       |
| 6-9 inches                                                   | 5 feet                              |
| 10-14 inches                                                 | 10 feet                             |
| 15-19 inches                                                 | 12 feet                             |
| over 19 inches                                               | 15 feet                             |



- This tree enclosure shall be erected before demolition, grading, or construction begins and remain until final inspection of the project. A ‘Warning’ sign of size 8.5“x 11” shall be prominently displayed on each protective enclosure to state the following:
- The following activities are prohibited within and in the vicinity of the tree protection zone throughout the entire duration of the construction project:
- Cutting of tree roots by utility trenching, foundation digging, placement of curbs and trenches, or other miscellaneous excavations
- soil disturbance or grade change
- drainage changes
- storage of material, topsoil, vehicles, or equipment
- Activity including but not limited to compaction, grading, construction etc.
- dumping of any material including but not limited to paint, petroleum products, concrete, mortar, dirty water, waste
- use of the tree trunks as a backstop, support or anchorage as
- a temporary power pole, signpost or other similar function
- The following activities are permitted or required within the Tree Protective Zone with approval from Landscape Architect:
- Mulching with wood chips (unpainted/untreated) or approved material to a four to six inch depth, leaving the trunk clear of mulch to prevent inadvertent soil compaction and moisture loss.
- Irrigation, Aeration, fertilization indicated by Landscape Architect for the healthy growth/maintenance of the tree
- if tree is adjacent to or in the immediate proximity to a grade slope of 8% or more, erosion control measures shall be installed outside the Tree Protection Zone to prevent siltation and/or erosion within the zone

#### 11.8.6 Plant Protection

- i. All plant material is to be carefully protected and if necessary wrapped in the nursery during lifting, awaiting transportation, during transportation, unloading and during storage on site.
- ii. Any evidence of unsatisfactory protection to roots, stems, branches and leaves will result in plants being rejected.
- iii. Unprotected plants must not be transported during very hot weather, and all plants must be kept moist during transportation and storage. No plant material shall be left on site unplanted for more than two days.

#### 11.8.7 Work by Machine or Hand

- i. All operations herein described shall be carried out by suitable approved machines or by hand.
- ii. Any work around the base of existing trees, in confined spaces or which is impractical to carry out by machine for any reason shall be executed by hand and the contractor shall include for this in his rates.

#### 11.8.8 Notice of Intentions

- i. The contractor shall give forty-eight hours written notice to the Employer/Employer's representative of his intention to commence any of the following operations:
  - Setting out,
  - Planting,
  - Topsoiling,
  - Turfing,
  - Sprigging,
  - Maintenance visits

#### 11.8.9 Heavy Machinery

- i. Heavy machinery, which would excessively consolidate the sub-soil, shall not be used during any operations nor shall heavy machinery be taken over areas prepared for planting or grassing.

#### 11.8.10 Substitutions

- i. If the Main contractor's specialist subcontractor is unable to supply a particular species of plant he is to notify the Employer/Employer's representative in advance of his intention to make a substitution. No substitution will be allowed without prior written agreement of the Employer/Employer's representative.
- ii. Notices of substitutions are to be made sufficiently far in advance of installation to ensure that the substituted material conforms to specifications. Substitutions requested by the Main contractor's specialist subcontractor after work has started on site will not be entertained.

#### 11.8.11 Setting Out

- i. The Contractor shall be responsible for accurately setting out all the works prior to the commencement of the works and shall rectify errors in setting out at his own expense.

- ii. Any discrepancy in site area between that shown on the drawings by Landscape Architect appointed by contractor and the actual area on the ground shall be notified to the Employer/ Employer's representative.
- iii. The Contractor shall supply all necessary materials, equipment and labour to enable the Landscape Architect to check the setting out, levels and dimensions on the site along with the Employer/ Employer's representative.

11.8.12        Tools and Equipment

- i. The Contractor shall use proper tools and equipment for the carrying out of the works and is to ensure that the work force is fully and properly equipped with the correct equipment and experience for the job at hand.

11.8.13        Failures of Plants (Pre-practical completion)

- i. Any trees, shrubs, grass or other plants (other than those found to be missing or not in accordance with the Contract Documents as a result of theft or malicious damage and which shall be replaced), which are dead, dying, missing or found not to have been in accordance with the Contract Documents at practical completion of the Works shall be replaced by the Contractor entirely at his own cost unless the Contract Administrator shall otherwise instruct.
- ii. The Contract Administrator shall certify the dates when in his opinion the Contractor's obligations under this clause have been discharged.

11.8.14        Plants Defects Liability and Post Practical Completion Care by Contractor

- i. Any grass which is found to be defective within 24 months, any shrubs, ordinary nursery stock trees or other plants found to be defective within 24 months and any semi-mature, advanced or extra large nursery stock trees found to be defective within 24 months of the date of virtual completion due to materials or workmanship not in accordance with the Contract Documents shall be replaced by the Contractor entirely at his own cost unless the Contract Administrator shall otherwise instruct.
- ii. The Contract Administrator shall certify the dates when in his opinion the Contractor's obligations under this clause have been discharged.
- iii. Malicious Damage or Theft (Before Practical Completion): All loss or damage arising from any theft or malicious damage prior to practical completion shall be made good by the Contractor at his own expense.

11.8.15        Submittals

- i. The Contractor shall submit for review drawings by Landscape Architect appointed by contractor completely dimensioned, indicating any pattern layouts, special installation procedure, cutting, fitting, sinking and adjacent equipment materials for coordination.

- ii. The Contractor shall submit samples of all materials and samples of workmanship for approval by Employer/Employer's representative.
- iii. The Contractor shall be responsible for producing and submitting for comment and approval to the Employer/Employer's representative the shop drawings and samples of all elements indicated in this section. All should be based on the drawings provided by Landscape Architect appointed by contractor. All submissions should be reviewed, approved and endorsed by the Contractor.

11.8.16        Handling, Storage And Delivery

i. The Contractor shall:

- Coordinate delivery with suppliers, to minimize handling.
- Handle and store equipment and materials in such a manner that no damage will be done to the materials or the work of other trades.
- Store packaged materials, undamaged in their original wrappings, or containers with manufacturer's labels and seals intact.
- Stack equipment and materials on wooden platforms at least 150mm clear of the ground and protect with weatherproof covers.
- Damaged equipment, material or works will be rejected by the Employer/Employer's representative whether built-in or not.
- For equipment, materials and work, covering shall be of suitable material containing nothing that may injure or stain the materials.

11.8.17        Protection of Work

- i. The Contractor shall protect all equipment, materials and completed work from damage until final completion of the work.
- ii. The Contractor shall remove and replace damaged work at no extra cost.

11.8.18        Reference Standards

- i. The Contractor shall comply with all relevant Indian Standards, ASTM, British Standard Code of Practice, Draft BS or DIN Standard applicable to elements indicated in this section, the recommendations and requirements of such documents shall be considered a minimum standard of such work described and must be complied with.
- ii. Nothing shall relieve the Contractor of his responsibility for providing a higher standard than the relevant Code or Standard where it is required to comply with other sections of the Specification.

### **11.9. PLANT MATERIALS AND PLANTING OPERATIONS**

The following plant descriptions cover the different categories of plant material to be used on the site.

These descriptions and their accompanying drawings requirements must be studied carefully and adhered to.

Plants that do not reach the specified dimension or quality, characteristics in this section or in the sizes and descriptions set out in the Bill of Quantities will be rejected and will have to be replaced at the Contractor's cost.

Trees and palms and large feature plants that are growing in open ground are to be prepared for transplanting at least 2 months before moving, either to containers in the nursery or direct to the site.

Preparation of in-ground trees and palms shall be by root pruning to the stated rootball dimensions.

Trenching around the outer edge of the rootball using pruning and a sharp spade shall be done in four separate stages trenching in quarters, with one quarter of the tree roots being cut and backfilled each week, the next quarter the following week, with all of the ball being cut in one month.

If roots over 25mm are encountered these are to be cleanly cut with large secateurs or pruning saw.

The trench which shall be at least 200mm wide shall be dug to the full specified depth of the rootball and undercut at the end of the root-pruning exercise to sever base roots.

The whole trench shall by this time be backfilled with sand. The tree is then to be allowed to settle for one month before final wrapping with protection and lifting. The rootball is to be well watered during this period.

For trees and palms that are to be containerised or root wrapped, the lifting and placing in containers or being wrapped is to be done immediately after the root trenching operation is complete.

Plants to be transported or moved are to be thoroughly wrapped and protected prior to transporting.

Rootballs are to be wrapped and tied with Gunny sack or hessian sacking if not containerised.

Exposed trunks are to be wrapped in rice straw including the lower parts of the branch system.

The upper branch system, especially if well furnished with leaves and twigs during transportation is to be completely wrapped in Lightweight netting or cloth tied and palms are to be laid at an angle to prevent damage from overhead structures and from buffeting and shall be covered by canvas as protection from wind.

Damaged trees will automatically be rejected on arrival at site.

All trees and palms are to be purchased, stored and grown on in suitable nursery conditions within one month of the contract and made ready for direction by the Landscape Architect appointed by Contractor.

Failure to procure within this time and to reveal the source of supply and location will result in the Employer/Employer's representative sourcing the plant materials for the Contractor, and the cost of this sourcing operation will be deducted from the Contractor's payments.

All dimensions shown with tolerances (that is 120 - 150mm) refer to maximum and minimum dimensions that will be accepted. Measurement of all plants of one species shall, as a minimum, average between the upper and lower figures (that is in the above case 135mm).

All trees and palms specified for containerising or root wrapping after root pruning operations are to be well furnished with leaves over the crown of the tree. Thinning of leaves to reduce transpiration to give a 50% cover is permissible providing due notification is given that thinning is required to ensure that the trees can be inspected before thinning work is done. Bare crowned trees will not be permitted.

Leave cover: Any trees or palms which shed their leaves within 2 weeks of transplanting are to be replaced by the Contractor at no extra charge.

#### 11.9.1 Trees

##### a. Instant Trees

These are semi-mature trees especially prepared in advance for transplanting.

Root pruning to cleanly cut roots to the diameter of the rootball shall be carried out 3 months in advance of transplanting.

Trees shall be 300 - 450mm (12" - 18") circumference of stem when measured 1.0m (3') from ground level and shall have a clear stem of minimum 1.8 metres.

The head shall be well balanced and contain at least four main branches 500-1000mm long giving an overall height of 3 - 4m after pruning.

All saw cuts are to be painted with an approved insecticide/fungicide solution.

##### b. Extra Heavy Standard Trees (EHS)

These are large size nursery grown trees pruned during growth to produce a tight well rounded head and a straight stem clear of leaves or twigs.

Trees shall be 140 - 180mm circumference of stem when measured 1m above ground level and shall have a clear straight stem of minimum 2m.

The head shall be well balanced and rounded and contain at least four main branches, and a well developed secondary branch system giving an overall height of 4.5 - 4.8m at the time of planting.

Trees shall have a defined central leader. Pruning at the time of removal from the nursery will not be permitted.

In dry weather conditions trees are to be sprayed with approved Anti-transpirant.

Rootball dimensions: diameter 750mm x 600 deep minimum. Branching/leaf spread shall be of 2.2 - 2.4m diameter.

c. Heavy Standard Trees

These are large size nursery grown trees pruned during growth to produce a tight well rounded head, and a straight stem clear of leaf or twigs.

Trees shall be 120 - 150mm (5" - 6") circumference of stem when measured 1.0m (3') from ground level and shall have a clear straight stem of minimum 1.8 metres.

The head shall be well balanced and rounded and contain at least four main branches with a well developed secondary branch system and a central leader, giving an overall height of 3.5 - 4.0m (10' - 13') at the time of planting.

Pruning at the time of removal from the nursery will not be permitted.

In dry weather conditions, trees are to be sprayed with approved Anti-transpirant.

Rootball dimensions: diameter 600mm (2') x 450mm (1'6") deep minimum.

Branching/leaf spread to be of 1.8 - 2.0m diameter.

d. Standard Trees

These are medium size nursery grown trees pruned during growth to produce a tight well rounded head, and a straight stem clear of leaves or twigs.

Trees shall be 100 - 120mm circumference stem when measured 0.9m from ground level and shall have a clear straight stem of minimum 1.5m.

The head shall be well balanced and rounded and contain at least four main branches with a well developed secondary branch system and a defined central leader that has not been pruned, giving an overall height of 2.5 - 3.0m at the time of planting.

Pruning at the time of removal from the nursery will not be permitted.

In dry weather conditions, trees are to be sprayed with approved Anti-transpirant.

Rootball dimensions: diameter 500mm (1.6") x 300mm (1') deep minimum.

Branching/leaf spread shall be of 1.5 - 1.8m diameter.

e. Standard Feathered Whips

These are medium sized nursery grown trees having a single straight stem and unbroken leader giving an overall height of 2.5 - 3m.

The stem shall be fully furnished with evenly spread and balanced lateral branches down to ground level and shall be 80 - 100 mm circumference of stem when measured 1m from ground level.

The tree shall have a strongly developed fibrous root system and shall be container grown. Leaves or branches shall not be cut off before planting.

Rootball dimensions 450 x 300mm minimum. Branching/leaf spread shall be of 1.5 - 1.8m diameter.

f. Ships/Saplings

These are young tree grown from seed or cuttings which are trimmed or pruned, furnished with branches down to ground level.

Trees shall have a single straight stem and unbroken leader between 900 - 1500mm overall height.

Stem thickness will vary between species, but a strong stem which does not bend over is required.

The tree shall have a strongly developed fibrous root system and shall be container grown. Leaves shall not be cut before planting.

Container dimensions: 250mm diameter x 250mm deep minimum.

#### 11.9.2 Palms

All palms shall be single stem. Single Stem Palms shall have clear straight trunks of heights as stated in the Bill of Quantities as measured from the root collar to the base of the lowest leaf sheath. The stem girth shall be of dimension normally found for palms for the stem height and species specified.

Acceptable tolerances to variations in stem height shall be +200mm or -200mm from the height specified in the Bills of Quantities.

The heads of palms shall be well balanced with at least 7 leaves and a healthy growing apical shoot all free from pest and disease.

a. Rootball dimensions shall be in proportion to stem heights as follows:

| Stem height | Rootball diameter | Depth |
|-------------|-------------------|-------|
| 1m          | 400mm             | 400mm |
| 2m          | 750mm             | 600mm |
| 3m          | 900mm             | 600mm |
| 4m          | 1200mm            | 750mm |

#### 1.1. Shrubs, Herbaceous Plants and Ground Covers

a. Shrubs

These are woody perennials of generally multi stemmed and bushy habit ranging from 3 - 4.5m down to 500mm height.

Shrubs shall have no less than three main stems and shall be well balanced and bushy, with strongly developed fibrous root systems, and shall be pruned in advance as required to achieve the specified height tolerances.

Branches shall break from the base of the plant just above the root collar, and shall be well furnished with leaves right down to ground level.

All plants are to be container grown in containers of suitable dimensions for the species.

b. Herbaceous Plants

These are non-woody perennials usually of a clump forming habit.

Plants shall have a well developed main stem or stems with good symmetry, a healthy root system, free from pest or disease.

Clumps of herbaceous plants shall include rhizomes, corns, tubers or roots and soil undisturbed by lifting with evidence of growing shoots emerging above soil level.



All herbaceous plants are to be grown in containers unless specified as being produced by alternative method.

c. Groundcover plants

These are low growing, 500mm or less, or prostrate shrubs or herbaceous plants whose habit is to totally cover the soil.

All groundcover species shall be evenly balanced to allow equal growth in all directions.

Plants shall have fully developed roots and leaves.

Rooted cuttings will not be accepted. All plants to be container grown.

Rooted shoots of certain spreading ground cover plants shall be used only where specified, planted as 'sprigs' as opposed to established plants in soil.

Plants shall be rooted shoots and shall have at least one and evidence of vigorous root growth.

Recent cuttings with no root development shall not be acceptable.

d. Climbers

Climbers are plants whose growth habit is to climb upwards by means of twinning stems, tendrils or clinging roots.

Plants shall be grown to reach the recommended size using stocks no less than one year old, and no more than five years old at the time of the start of the contract.

Plants shall have at least two leader shoots up to the recommended height and a vigorous root system.

All plants to be container grown.

11.9.3 Hedging Plants

Hedging Plants shall be shrubs such as Lawsonia, Ixoras, etc as per design requirements of Landscape Architect appointed by contractor as suited to regular clipping, previously prepared to establish a uniform height and complete foliage cover to the stem from ground level upwards.

Plants shall be a minimum overall height of 500mm with a minimum of 4 branches arising from ground level and a strongly developed fibrous root system.

Branches shall be well clothed in leaves down to ground level.

All plants to be container grown in suitably sized containers.

Hedging plants shall be prepared by root and branch pruning to achieve the 'box' shape shown, at least 3 months before transplanting.

11.9.4 Container Grown Plants

Container grown plants shall mean trees and shrubs which have been grown in containers sufficiently large to hold the developing root system from seed or cutting and shall be filled with suitable nutrient rich, free draining compost as per design requirements of Landscape Architect appointed by contractor.

Container grown stock shall be well watered prior to dispatch from the nursery and shall remain in the container until planted on site, whereupon the container shall be carefully removed to avoid soil disturbance.

Empty containers are to be removed from site.

#### 11.9.5 Cultivation of Plant Beds

Cultivation of the completed soil mix beds shall take place only when the seeding or planting operations can begin immediately after cultivation. No cultivation shall be undertaken in weather or ground conditions in which operations may destroy soil structure or where soil mix has not been approved by the Landscape Architect.

Cultivation shall be by approved mechanical or manual means to a depth of 250mm for Ground Cover and 450mm for Shrubs to provide an even, weed free texture.

After cultivation, stone picking from the surface of soil areas shall be carried out such that all stones and lumps exceeding 50mm in diameter are collected. All stones, weeds and rubbish brought up shall be removed from the site to a tip to be found by the Contractor.

Ground cover, rooted shoot and herbaceous beds are to have 25mm solid conditioner spread over the entire area and well forked in to the top 250mm of soil during cultivation. This operation is separate from the mulching specified.

### 11.10. **PLANTING TECHNIQUES AND ACCESSORIES**

All plants shall be planted to accommodate the spreading root system of the plant to the same soil depth as in the nursery and shall be well watered before removing them from containers. Plants are to be positioned upright and the soil firmed around the roots.

Planting shall be carried out in accordance with the schedule of plants and drawings supplied by Landscape Architect appointed by contractor. The number of each species and variety shall be evenly distributed over the area as indicated on the drawings by Landscape Architect appointed by contractor.

For large areas the outer rows are to be set out first to ensure the correct shape to the bed is established. The remaining plants are then to be evenly distributed to cover the planting area. The Landscape Architect is to be notified in advance if there are too many or too few plants to fill the area required and an assessment of setting out adjustments will be directed accordingly.

Setting out of plants is to be completed and approved by Landscape Architect appointed by contractor before planting into the soil bed can commence.

#### 11.10.1 Small Shrubs, Herbaceous, Ground Cover and Root Planting in Beds

Small shrubs, ground cover and herbaceous plants shall be planted in pockets formed by a trowel or spade.

The pocket shall be deep enough and wide enough to accommodate the root of the plant.

The sides and base of the pocket shall be loosened and the plant roots lightly loosened from the rootball.

The plant shall be placed upright in the pocket and firmed into the ground by backfilling and treading or hand pressure.

The topsoil in areas to receive rooted shoots shall be brought to a fine layer 75mm deep by approved mechanical means or hand raking.

Approved slow release fertiliser shall be applied evenly over the area at a rate of 40gms per square metre and shall be lightly raked into the surface.

Rooted shoots shall be firmly bedded into the soil at 75mm centres with each shoot spread on the topsoil surface, separated from adjacent shoots.

The area shall be top-dressed with finely sifted topsoil/compost mix as approved by the Landscape Architect appointed by Contractor to lightly cover the rooted shoots after laying.

The ground shall then be firmed by lightly treading or hand pressure around the roots, taking care not to damage the shoots, to ensure good contact with the soil.

Watering shall take place immediately after planting, using a fine spray.

The firmed up area is to be tightly cultivated after completion of this operation to leave an even layer before mulching.

#### 11.10.2      Shrub Pits

Shrub pits for large and medium shrubs, feature plants and climbers shall be excavated to 150mm wider on either side than the root spread, and to a depth of 150mm deeper than the root depth and shall not be less than 300mm x 300mm x 450mm deep.

The bottom 150mm of the pit is to be forked loose prior to backfilling.

Backfill material shall be topsoil Mix A for backfilling purposes. (Ref. Section 11.4.3 Soil Mixes)

The Contractor shall note that for planting into turf areas, where topsoil has not been spread topsoil mix will be required for backfilling purposes.

Climber pits shall be 150 - 200mm away from the supporting structure with the roots spread away from the wall or adjacent supporting structure.

The climbing plants shall be trained through the wire mesh with leading shoots directed upwards and tied.

Pits for shrubs and feature plants in planters shall be excavated to 150mm wider on either side than the root spread and to a total depth of the rootball.

The bottom of the pit shall be lightly formed, prior to planting taking care not to damage the terrain layer below.

After planting shrubs the area is to be watered immediately to bed the shrubs in.

Once the water has percolated away and left the surface relatively dry the soil area is to be lightly forked to loosen the surface and leave an even soil layer.

#### 11.10.3 Tree Pits

Tree pits shall be excavated to the dimensions and the location shown on the drawing by Landscape Architect appointed by Contractor.

Tree pits shall be dug a minimum of 3 weeks period prior to back filling.

The bottom of the pit shall be forked to loosen the soil. In case the soil is clayey, a layer of broken bricks and stones shall be spread on the bottom of the hole and this layer shall be covered with dried leaves or straw.

No tree pit shall be less than 300mm wider on either side than the root spread, and to a depth of 150mm deeper than the root depth, and shall not be less than 1m x 1m x 1m.

The trees shall be planted to the same depth in the nursery or as in their containers.

In case the site is infested with white ants the sides of the pits shall be brushed with a mixture of BHC (10% concentration) and water in a proportion of 200 gms of BHC mixed in 5 litres of water. BHC is the common name for the insecticide.

#### 11.10.4 Backfilling of Pits (trees, shrubs and climbers)

Before backfilling, imported topsoil and sand is to be thoroughly mixed with soil conditioner and organic fertiliser as specified for Topsoil Mix A. (Ref. Section Section 11.4.3 Soil Mixes)

The tree pit shall be backfilled with the Soil Mix A to a depth which will allow soil, after settlement to match surrounding ground level.

The filled pit shall be watered and allowed to settle. After settlement soil levels shall be topped up as required.

The centre of the backfilled tree pit shall be excavated large enough to allow placing of the rootball, and to allow even compaction all round during backfilling.

After careful removal of the container or wrapping, the rootball of trees shall be placed carefully in the pit, and soil replaced gradually into the pit.

The soil is to be consolidated during backfilling in layers to ensure that the plant is firmly held in the ground and that voids are not left around the roots.

Care shall be taken during planting to avoid damage to the root system, branches or leaves.

After careful removal of the container or wrapping, the rootball of the roots of shrubs and climbers shall be placed carefully and the soil replaced gradually in the pit.

The soil is to be consolidated during backfilling in layers to ensure that the plant is firmly held in the ground and that voids are not left around the roots.

Care should be taken during planting to avoid damage to the root system, branches or leaves.

#### 11.10.5 Staking and Supports

Stakes shall always be used when planting instant trees, standards and single stem palms and for tall shrubs when directed by the Landscape Architect appointed by Contractor.

Stakes shall be in sawn timber of an approved type and be carried out according to the size of plant to be supported. The types of approved staking methods are:

a. Tripod or Quadropod staking for large trees or palms (extra heavy standard and above)

Three or four stakes each 50 x 50mm section shall be positioned equidistantly around the tree and firmly driven into the ground at angles of between 30 - 40 degrees.

The inner ends of the stakes shall extend beyond the tree stem by not more than 150mm and shall not be higher than 300mm below the lowest branch.

The tree stem shall be wrapped in hessian or gunny sacking at the point where the tree stakes are to be fastened in order to prevent bark damage.

The stakes shall be neatly and firmly fastened to the tree stem using rubber hose or cord; String are not be used.

The stakes are to be adjusted and the position of the protective wrapping is to be altered up or down every month.

The hessian wrapping is to be sprayed with an approved horticultural pesticide.

b. Multiple guying - for large trees or palms (heavy standard and above)

A minimum of three wire guys are to be used per tree.

Each guy wire is to be fastened by a loop around the lowest branches of the tree at the junction with the main trunk or branches of the tree at the junction with the main trunk or stem.

Loops are to have protective rubber or plastic hose to prevent chafing and are to be fastened back to the guy wire by means of U-clamps or bolts.

Guy wires are to be fastened at ground level to short stakes firmly driven at an angle into the ground.

Stakes shall be minimum length of 600mm and are to be driven deep enough to resist movement.

A notch is to be made near the top of each stake for the fastening of the guy wire.

Stakes shall be positioned equidistantly and equally around the tree and shall be at least 300mm beyond the extent to the tree pit.

Distance away from the tree shall be gauged on site to provide firm and secure guying.

Each guy wire is to have one turnbuckle located near the fastening to the stake.

Guy wires are to be kept in a proper tension and adjusted to maintain the tree in a vertical position without guy wires being rigid.

c. Double Staking - for trees and palms (heavy standard and smaller)

Two stakes each 50mm x 50mm cross section shall be driven into the ground in a vertical position on either side of and outside the rootball of the tree so as to form a straight line outside the rootball of the tree so as to form a straight line with the stem at the centre.

Stakes shall be driven in to penetrate the bottom of the tree pit and be deep enough to resist lateral movement when tested.

Stakes shall not extend beyond the lowest branch of the tree and if necessary are to be sawn off at the top.

Fastening or securing of the tree may be carried out by using either:

i. Cross bar

A wooden cross bar of same section as the stakes is fastened in a horizontal position to the outside of the stakes by nails or tying securely at a level below the lowest branch.

The tree is fastened to the cross bar with a single adjustable tie of an approved rubberised or plastic type with a spacer and shall be fastened to prevent any chafing or abrasion of the bark.

No nails or fixings are to be driven into the tree trunk.

ii. Wire/Hose loops

Two separate wire or rope loops are made about the stem just below the lowest branch with each being fastened back to one of the vertical stakes.

Each loop is to have a protective outer covering or sheath of rubber hose to prevent chafing or abrasion of the bark.

The wire or rope is to be fastened to the stakes in a manner that allows adjustment of the tension to be made easily.

Tension on each wire is to be equal to maintain the tree in a vertical position.

Where directed by the Landscape Architect appointed by Contractor the tree may be secured with a second set of loops at a lower level.

d. Single Staking - for trees and palms of sapling size only

A single stake of cross section 50mm x 50mm is driven vertically into the ground 150mm - 250mm away from the tree.

The stake is driven down beyond the base of the tree pit and shall be firm when tested.

The top of the stake shall be 100mm below the lowest branch.

Two ties of an approved rubberised or plastic type are to be used.

The top tie is to be located 100mm below the top of the stake; the lower tie 300mm from the base.

Ties are to have spacers to maintain the 150mm - 250mm distance between the stake and the tree.

Ties are to be fastened to avoid rubbing, chafing or abrasion of the bark.

e. Climber wires

Wires for training climbing plants against walls shall be approved lightweight PVC mesh, fixed at 600mm intervals to screw eyes supplied under the sub contract.

Maximum mesh coverage shall be 180mm high x 240mm wide.

The climbing plants shall be trained through the wire mesh with the shoots directed upwards and tied.

11.10.6 Turfing

a. Close Turfing

Close Turf shall be a live grass sod or mat at least 300mm square with a well developed root system growing in a minimum of 25mm soil bed, free from stones or extraneous roots, cut mechanically or by hand to give an extra thickness and texture.

A sample of one square metre of Turf shall be submitted to the Employer/Employer's representative for approval before Turf is brought in for use on site.

The source of the material shall be stated by the Contractor.

Turf shall be free from weeds, fungus, pest or disease and contamination or pollutants.

Turf sods shall be kept moist and in shade and shall be planted within 24 hours after lifting.

In exceptionally dry weather, the turf must be kept well watered at the nursery or turf farm in order to keep full green leave structure.

Dry, brown or wilting grass turf will be rejected and growth or recovery on site will not be permitted.

i. Close Turfing: Ground Preparation

Rake the topsoil mix area to a smooth and uniform grade free of any slight mounds or depressions to achieve a uniformly flat surface.

Re-grade any depressions or humps that may occur until a satisfactory grade is achieved.

The area to be turfed is to be brought to a fine tilth by approved mechanical means or by hand raking.

Any stones over 25mm in diameter shall be removed from the site of turfing.

Watering of the area shall be carried out to produce a moist condition of the soil and to consolidate the soil.

If consolidation occurs to produce any areas with topsoil depths less than 100mm these areas shall have extra topsoil spread to produce finished levels.

Fertiliser shall be applied to all areas to be turfed prior to turfing at the rate of 40gm per square meter, evenly spread over the whole area and lightly worked into the soil.

ii. Close Turfing: Operations

Close turf sods shall be laid onto the surface of the prepared ground with leaf turfs upwards, butt jointed as closely as possible to achieve a uniform cover.

The turf shall be laid off planks working over turves previously laid.

The whole area is then to be top dressed with finely sifted topsoil mix to give an evenly smooth surface. The finished close turfing shall be lightly compacted by treading or with a wooden beater to ensure even coverage and compaction.

Watering shall take place over the area that has been turfed immediately after planting. Watering shall be undertaken by use of a fine spray to avoid disturbance of soil particles.

Turfing shall be only accepted as complete after the growth of an even grass cover is evident. Any areas not covered by green healthy grass to the satisfaction of the Employer/Employer's representative within 28 days after turfing shall be re-laid as specified at the Contractor's own expense.

For the period of 28 days after turfing the vegetative cover shall:

- I. Evenly cover at least 90% of the areas with leaves and spreading shoots of specified grass variety
- II. be free of perennial weeds or disease
- III. be healthy and vigorous and showing a strongly developed root system

Should there be any settlement due to lack of even compaction this will be corrected by application of topdressing of finely sifted soil to maximum depth of 25mm.

If the depression is greater than 25mm the grass in the affected area shall be lifted, the depression filled with sifted topsoil, lightly compacted and the affected area re-turfed as specified. These operations shall be done as often as necessary to produce an even and smooth surface free from bumps and hollows.

All turfing operations shall be carried out from wooden planks or plywood boards, with the workers moving away from completed turfed areas, raking any compressed soil or footprints before laying of sods.

All access onto soil areas shall be on wooden boards or plywood sheets. Areas compacted by working are to be re-cultivated and re-laid.

### iii. Maintenance of Close Turfing Before Completion

The following operations are to be carried out as often as required to achieve the specified quality of turf:

- I. Cutting before Completion shall be carried out as necessary to keep the grass to a maximum height of 30mm.
- II. Watering shall be carried out as often as necessary before Completion to allow a satisfactory green sward to develop over the whole close turfed area.
- III. One fertiliser application per month is to be carried out for before Completion.
- IV. Topdressing as specified as often as required to establish smooth even grades and levels free of hollows.



- V. If compaction or consolidation takes place or hard passing or baking of the soil occurs, the soil areas are to be well watered first and lightly loosened by mechanical means such as spiking, slitting or hollow tinning using approved equipment.
- VI. Completed close turfed areas are to be kept in a weed free insect free, fungus free and tidy condition until Completion (that is start of maintenance period).

#### iv. Sourcing of Turf Types

Close turfing materials are to be obtained from a bona-fide horticultural source or private landowner.

No turf is to be removed from unauthorised locations, roadside, riverbanks or private property without permission of the owner.

The Contractor is to inform source of all turf delivered to the Employer/Employer's representative before any turf is laid at site.

#### b. Fine Turf

Fine Turf shall consist of fine bladed rhizomatous grass such as Bermuda grass or cultivar specified by Landscape Architects appointed by the Contractor.

Fine Turf shall be a live grass sod or mat at least 300mm square with a well developed root system growing in a minimum of 25mm soil bed, free from stones or extraneous roots, cut mechanically or by hand to give an even thickness and texture.

A sample of one square metre of Fine Turf or both types shall be submitted to the Employer/Employer's representative for approval before fine Turf is brought in for use on site.

The source of the material shall be stated by the Contractor.

Fine Turf shall be free from weeds, fungus, pest or disease and contaminants or pollutants.

Fine Turf sods shall be kept moist and in shade and shall be planted within 24 hours after lifting.

#### i. Fine Turfing Operations

Subsoil mix shall be hand raked to provide an even and fine tilth to an even and accurate level matching kerb edge levels.

Any lumps or stones over 25mm in diameter brought up in this operation shall be removed from site.

Soil areas shall be lightly sprinkled with water to moisten surface in dry weather before laying turf.

Pre-Turfing fertiliser shall be applied to all areas to be turfed prior to turfing at the rate of 40gm per square metre evenly spread over the whole area and lightly worked into the soil.

The turves shall be laid on the prepared soil bed and firmed into position in consecutive rows with broken joints, closely butted and to the correct levels.

The turf shall be laid off planks working over turves previously laid.

Where necessary, the turves shall be lightly and evenly firmed with wooden beaters, the bottom of the beaters being frequently scraped clean of accumulated soil and mud.

A dressing of finely sifted topsoil/sand/compost mix shall be applied and well brushed into the joints to give an overall even surface.

Watering shall take place over the area that has been turfed immediately after planting. Watering shall be undertaken by use of a fine spray to avoid disturbance of soil particles.

Fine turfing shall only be accepted as complete when new growth has caused turves to knit together and adhere by rooting to the soil bed.

Any areas not covered by green healthy grass to the satisfaction of the Landscape Architect within 28 days after fine turfing shall be re-laid as specified at the Contractor's own expense.

If shrinkage occurs or the joints open, finely sifted topsoil/ sand/ compost mix shall be brushed into the gaps and shall be watered in.

Any inequalities in finished levels owing to variation in turf thickness or uneven consolidation of soil shall be adjusted by lifting turves and by re-spreading fine soil mix to correct levels and relaying turves as specified.

The finished level of the Fine Turf shall be 25mm above adjoining paved surfaces or other hard edges after allowing for final settlement.

Turf edges and margins shall be laid with whole turves and uneven edges trimmed to give an even line.

#### ii. Maintenance of Fine Turfing before Completion

Watering shall be carried out as often as necessary before completion to allow a satisfactory green sward to develop over the whole fine turfed area.

Cutting before completion shall be carried out as necessary to keep the grass to a maximum height of 25mm.

One extra fertiliser application is to be allowed for before completion, to be used if directed by the Landscape Architect appointed by Contractor.

Completed fine turfed areas are to be kept in a weed free insect free, fungus free and tidy condition until completion (that is start of maintenance period).

Edge cutting shall be carried out as required along edges of paths, plant beds or other junctions with other materials. Only sharp edge cutting tools are to be used for this operation.

Over cutting or ragged edges will require the relaying of the turf edge strip as specified (that is 300mm wide).

#### iii. Specification for Sourcing of Turf Types

Fine Turf is to be specially prepared horticultural turf, re-lawn or turf-carpet, mechanically cut to specified tolerances.

#### c. Slope retention work with Coir Mat Turfing

i. Site Preparation

Sub-grade shall be excavated to proper lines and grades based on construction plans.

The sub-grade shall be fairly smooth and free of sharp objects and debris that may damage the Coir Mat.

The soils should be proof rolled prior to Coir Mat and backfill placement.

The soils should be compacted to 95 Percent of the relative density based on the Site Engineer's recommendations.

Above the compacted soil, Top soil mix 'A' to be laid upto 150 mm thick layer for planting turf.

Coir mat to be laid first and then planting operation should take place.

ii. Laying of Coir Mat

Coir Mat should be placed in correct orientation as shown on the construction plans and approved by the Engineer.

The Contractor should verify the orientation. The orientation of the Coir Mat should be such that it is rolled in the direction of the slope – not perpendicular to it.

The Coir Mat should be cut to length based on construction plans using an Engineer approved cutting tool.

Each sheet of Coir Mat should be pulled taut by hand to get rid of any wrinkles.

Adjacent sheets should be overlapped for minimum width of 0.30 M.

Each sheet may be secured in place using staples, pins, sandbags, backfill, or by other Engineer approved methods to help prevent disruption during the installation of adjacent sheets

iii. Turfing

Turfing should be done as per procedures mentioned above once Coir mat is installed.

11.10.7 Watering of all Plants

After planting all plants are to be thoroughly watered to soak the ground all around the rootball.

After watering and the water has percolated away leaving the surface relatively dry the soil is to be lightly cultivated to give an even soil tilth.

11.10.8 Mulching

After completion of planting and watering and light cultivation operations a 50mm deep layer of approved mulch shall be spread and forked in over all cultivated planting areas.

Around each tree and palm and around the base of each climber, additional mulch is to be applied to a 50mm depth to a diameter of 600mm.

Mulching is to be done within 2 days of completing planting and watering in.

11.10.9 Fertilising

After a period of settling in of at least one month, all pit planted materials shall be fertilised with an approved slow release fertiliser at the rate of:

Trees : 250gm per tree

Shrubs/climbers : 50gm per plant

Ground Cover/Herbaceous : 100gm per square meter spread

Rooted Shoots : around the base of the plants - 40gm per square meter

All fertilised areas are to be watered immediately after fertiliser application.

11.10.10 Disease Control

The Contractor shall take all necessary precautions to prevent or eradicate any outbreak of disease or insect attack.

11.10.11 Planting into Turf Areas

Where planting is to be carried out in areas of turf, the turf shall be carefully cut to the size of the tree or shrub pit, rolled and stored for re-use, being kept moist and in shade.

After planting is complete stored turf shall be re-laid around the base of the plant.

The Contractor shall replace at his own expense, any turf which is damaged during planting operations.

11.10.12 Protection of Planted Areas

The contractor shall be responsible for protecting all planted areas.

If it is necessary for the Contractor to erect protective fencing, the Contractor shall be responsible for keeping the fencing in position and in good repair until the end of the maintenance period.

Fencing proposals shall be submitted to the Employer/Employer's representative for approval.

Post and string fences shall not be acceptable.

11.10.13 Maintenance prior to Completion

After planting and prior to the onset of the maintenance period, the Contractor shall be responsible for carrying out all necessary measures to ensure that the plant material thrives and becomes established and that the landscape areas are kept in a clean and tidy condition.

The Contractor shall allow for carrying out the following maintenance operations when necessary prior to the onset maintenance period, all as specified in section 11.11 of this specification:

- Replacement of dead/missing plants

- Grass cutting around trees
- Watering
- Cultivation and loosening of soil
- Weeding
- Pruning and clipping
- Firming up and adjusting stakes and ties
- Eradication of pest or insect attack
- Topdressing and mulching
- Fertilising

The Contractor shall be responsible for replacing any plants which fail to survive as a result of inadequate maintenance operations, poor workmanship or poor quality of plant material prior to completion.

The Virtual Completion Certificate will not be issued until all plants scheduled on the Drawings and Schedule of Works are installed in a healthy condition in the manner specified.

#### **11.11. MAINTENANCE WORKS**

##### **11.11.1 General**

- i. The Contractor shall maintain the landscape for a two-year period after the date certified by the Landscape Architect that the work has been satisfactorily completed (issue of Certificate of Completion).
- ii. The extent of the landscape to be maintained by the Contractor shall be deemed to cover and include all soft landscape areas within the overall project boundaries as shown on the drawings including all existing soft landscape not affected by the contract works and retained intact or nearly so through the end of the contract period as well as all the landscape works covered in the contract scope of works. No additional maintenance charges will be allowed unless specifically agreed to by the Landscape Architect in writing.
- iii. The Contractor shall ensure that a senior qualified supervisor is made available for organising and running the maintenance programme. The Contractor shall also have available an experience foreman who can supervise the workers on a day-to-day basis. An adequate trained labour force of at least 3 workers must be available for routine work and they must be on site for at least half a working day, 5 days per week during the maintenance period. Additional grass cutting operators will be needed to ensure adequate cutting and cleaning.

- iv. The Contractor's Supervisor shall inspect the site once per week during the maintenance period and shall prepare a brief schedule of operations required for the coming week. The format for the schedule of operations will cover each distinct areas of the site such as frontage, rear, courtyard, roof, interior, etc. The schedule shall describe the operations the Contractor intends to carry out in the coming week to cover the items listed in the specification and to ensure that the current weather conditions and growing performances, insect attack, etc is taken into account.
- v. A copy of this schedule is to be submitted to the Landscape Architect and Employer every week so that a running record of proposed operations can be checked at the maintenance inspections each month. If in the opinion of the Landscape Architect the maintenance works have not been satisfactorily carried out according to site conditions and the specifications, part of the monthly payment will be withheld until the works have been satisfactorily carried out.
- vi. The contractor shall carry out all necessary measures to ensure that all pot plants, trees and shrubs and other plants shall thrive and become established within this period. All landscape areas will be inspected monthly and lists of remedial works issued after each inspection. All items on the remedial lists are to be carried out by the time of the next inspection, ie within one month.
- vii. The Contractor shall keep the landscape areas clean and tidy at all times and dispose of all waste materials arising from the cleaning.

#### 11.11.2 Maintenance of Planted Areas

- i. The Contractor shall water all trees, palms, shrubs, ground cover, rooted shoots, herbaceous plants and other planting areas as often as necessary to keep the ground moist all around and to the full depth of the roots of the plants to a minimum depth of saturation of:
  - 100mm for groundcover
  - 300mm for shrubs
  - 750mm for trees
- ii. Fresh water only shall be used for the Works. Water shall be supplied to the Contractor from agreed points on the site. However, it will be only to necessary for the Contractor to supply his own means of transport from the watering points to the plant beds.
- iii. An inspection of watering requirements is to be made by the Contractor at least two times a week in dry weather.
- iv. Water shall be supplied using an approved hose or sprinkler so as not to cause compaction or wash-outs of the soil or loosening of plants. The Contractor shall immediately make good any such damage, soil erosion or outwash and plants loosened by erosion are to replanted or if damaged, replaced.

- v. All plant beds are to be kept in a weed free condition with a weeding operation once a month. All weeds, stones and rubbish collected from this operation shall be removed from the site to a tip to be found by the Contractor. Herbicides may not be used on this site unless a specific application in writing is made by the Contractor with full back up data on the performance of the chemicals and the particular need for the chemicals use. Approval will in all cases be subject to the Landscape Architect's decision.
- vi. After weeding, at least once per month the soil surface is to be lightly broken up between plants using a pronged fork upto maximum depth of 100mm. Contractor shall Take care not to disturb the root systems of plants. After forking the soil loose, the mulch and loosened soil are to be raked to give an even re-distribution of the mulching materials
- vii. Firming up and adjusting of stakes/ties shall be carried out monthly to ensure that the trees and shrubs are firmly held in the ground. If required guy ropes or tree pits shall be adjusted, tightened or loosened. If tree ties or ropes are rubbing the bark of the trees, the ties are to be taken off and retied. Any damaged branches are to be carefully pruned and the wounds sealed.
- viii. All protective fencing is to be maintained and kept in good condition and in position until the end of the maintenance period.
- ix. Trees shall be pruned if dead, rotten or crossed branches are present or to maintain a clear stem up to the specified height using the methods described below. Tree pruning is to be reviewed monthly.
- x. All shrubs and ground covers are to be reviewed monthly and pruned as and when required during the Maintenance Period to promote bushy growth and good flowering characteristics. The shrubs shall be checked and all dead wood, broken, damaged or crossed branches shall be cut back, depending on species. Pruning and removal of branches is to be carried out using sharp clean implements to give a clean sloping cut with one flat face. Ragged edges of bark or wood are to be trimmed with a sharp knife.
- xi. Pruning for all plants shall be carried out as follows:
- Pruning is to be done with the cut just above and sloping away from an outward facing health bud.
  - Removal of branches is to be done by cutting flush with the adjoining stem and in such a way that no part of the stem is damaged or torn.
  - Ragged edges of bark are to be trimmed with a sharp knife.
  - Any cuts or wounds over 25mm diameter are to be painted with an approved sealant after trimmed.
  - All pruning to be cleared up and removed from site after pruning.

- xii. All hedges, mat forming herbaceous plants and ground cover plants shall be clipped with shears as often as necessary (at least monthly) to maintain a tidy appearance. Tall hedges are to be cut to forms shown on the drawings. Fertiliser is to be applied to clipped areas around 1-2 weeks after clipping.
- xiii. Selective pruning of flowering plants shall be done where special flowering characteristics are required such as for Ixoras, Hibiscus, Allamanda where flowering takes place on twig ends. Heavy clipping must not be used for these species since this will remove future flower buds. Selective pruning by clipping non flowering twigs and leaving flowering twigs is necessary for these plants, and this operation must be done by experienced workers.
- xiv. The Contractor shall allow for monthly fertiliser operations during the Maintenance Period. An approved slow release fertiliser shall be applied to each plant at the rate of 50gm per shrub and 200gm per tree, one month after planting and thereafter monthly. After spreading the fertiliser around the base of the plant the granules shall be lightly forked into the soil, and the plant well watered. Herbaceous and ground cover areas shall receive 25mm of approved soil conditioner, evenly spread and mixed with 50gm/m<sup>2</sup> of approved slow release fertiliser, evenly spread over entire area and lightly forked into the soil to break up the top layer, and the area well watered on a month by month basis.
- xv. The horticultural requirements of different plants or areas may involve variations to those techniques (such as the use of organic liquid fertilisers for sensitive plants) and variations in method will be authorised as required.
- xvi. Heavy feeding plants such as Canna, Heliconia and Lantana shall be dressed with a 25mm mulch of approved organic compost or similar approved compost every 2 months, lightly forked in around the base of the plants.
- xvii. Additional mulching layer, 25mm deep to be spread and forked in over all planted areas at 3 monthly intervals.
- xviii. The Contractor shall make regular weekly checks to ensure that the plant material is insect and pest and fungus free. No pesticides may be used unless approval from the Landscape Architect is given from the Contractor stating the chemical intended for use; concentration, spraying programme and including full technical details of the product.

#### 11.11.3 Maintenance of Lawn Areas

- i. The Contractor shall mow all lawn areas using approved cutting equipment to maintain a close sward to a height of not less than 20mm and not more than 30mm for all grass types.
- ii. Mowing shall be carried out generally weekly, except in dry weather and grass shall not be allowed to flower between cuts.



- iii. Weekly inspections are to be made to ensure adequate planning of grass cuts to suit growth and weather conditions. All clippings to be gathered up and removed from site.
- iv. All grass areas are to be watered by means of sprinklers during dry weather as often as is required to keep the grass green and the soil moist.
- v. The Contractor shall provide hoses and sprinklers for use from water points provided. Weekly inspections are to be made to determine the need for water and, in dry weather watering must be done to moisten the soil to a depth of 100mm.
- vi. Fertiliser of NPK value 10-15-15 or similar approved be spread at a rate of 40gm/sq m over all grass areas at monthly intervals, using approved spreading equipment to give an overall even spread. Grass areas that have been fertilised shall be watered if no rain falls within 24 hours.
- vii. The Contractor shall apply top-dressing of not more than 15mm depth fine sand and granulated compost raked and spread evenly over the lawn areas. The next top-dressing shall be applied only after the grass has grown through to a mowable height.
- viii. There shall be at least two applications of topdressing during the maintenance period, to be directed by the Landscape Architect appointed by Contractor.
- ix. If depressions or bumps over 25mm deep or high in turf areas during the maintenance period these are to be levelled out by lifting the turf and raising the soil level with sand/compost mix or trimming to level grades, followed by re-turfing.
- x. Grass areas are to be kept free of weeds, annual grasses, fungus and insect attack and free of stones or other debris throughout the maintenance period as often as is required.
- xi. All chemicals used shall be to the approval of the Employer/Employer's representative. Assessment of these operations is to be prepared on the basis of the weekly maintenance inspection chart.
- xii. If compaction or consolidation takes place or hard passing or baking of the soil occurs, the soil areas are to be well watered first and lightly loosened by mechanical means such as spiking, slitting or hollow tinning using equipment approved by the Employer/Employer's representative.

#### 11.11.4 Replacement Planting

- i. If during the course of the Maintenance Period trees or shrubs or other plants die because of a fault by the Contractor, the Contractor shall replace the plant at no cost to the Employer.
- ii. All questions related to responsibility for the replacement planting will be subject to site inspection and agreement of the appointment of responsibility.
- iii. This will be done very month at the monthly maintenance inspections.

11.11.5 Final Handover

- i. Two weeks before the end of the Maintenance Period a joint inspection shall be held with the Maintenance Agency, Contractor and the Employer/Employer's representative review the requirements for alteration or replacement in order to gain approval for Final Handover.
- ii. In order to ensure satisfactory handover procedures, the site meetings held each month between the Contractor and Employer/Employer's Representative will be used to inspect and approve the maintenance works which will be reviewed to ensure adequate work has been done.
- iii. At the time of the final inspection, all areas under this contract shall be free of weeds, neatly cultivated and raked, and all plant boxes in good order.
- iv. Grass shall be neatly cut and all clippings removed. No bare patches of earth shall be visible in turf or planting areas unless specified (that is rings around tree trunks).
- v. If, after this inspection, the Employer/Employer's representative is of the opinion that all work has been performed in accordance with the drawings and specifications, the Employer/Employer's representative will give written letter of acceptance and completion of the project.
- vi. If, all or certain portions of the work are not acceptable under the terms and intent of the drawings and specifications, the formal maintenance period for all the work shall be extended at no cost to the Employer/Employer's representative until the defects in the work have been corrected and the work is accepted by the Employer/Employer's representative.